

OIL ANALYSIS REPORT

Area ENGINE ROOM 1 Machine Id ER1 1B (S/N 1178) Component

Refrigeration Compressor

USPI 1009-68 SC (11 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

NORMAL




Sample Rating Trend

SAMPLE INFORM	/IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0011816	USP0006862	USP0004072
Sample Date		Client Info		12 May 2024	18 Feb 2024	01 Dec 2023
Machine Age	hrs	Client Info		14151	13977	13875
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	0	0	0
Chromium	ppm	ASTM D5185m	>2	<1	0	<1
Nickel	ppm	ASTM D5185m		0	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>3	0	0	<1
Lead	ppm	ASTM D5185m	>2	0	0	0
Copper	ppm	ASTM D5185m	>8	<1	0	0
Tin	ppm	ASTM D5185m	>4	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		0	0	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		0	0	0
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m	50	0	0	0
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0	0	0
Sodium	ppm	ASTM D5185m		0	<1	0
Potassium	ppm	ASTM D5185m	>20	0	<1	<1
Water	%	ASTM D6304	>0.01	0.002	0.002	0.006
ppm Water	ppm	ASTM D6304	>100	16	20	68
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	740	332	867
Particles >6µm		ASTM D7647	>2500	109	90	251
Particles >14µm		ASTM D7647	>320	5	9	19
Particles >21µm		ASTM D7647	>80	2	3	5
Particles >38µm		ASTM D7647	>20	0	0	0
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	17/14/10	16/14/10	17/15/11
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974	0.005	0.014	0.027	0.013

Contact/Location: MIKE WEAVER - CONTROUSP Page 1 of 2



OIL ANALYSIS REPORT

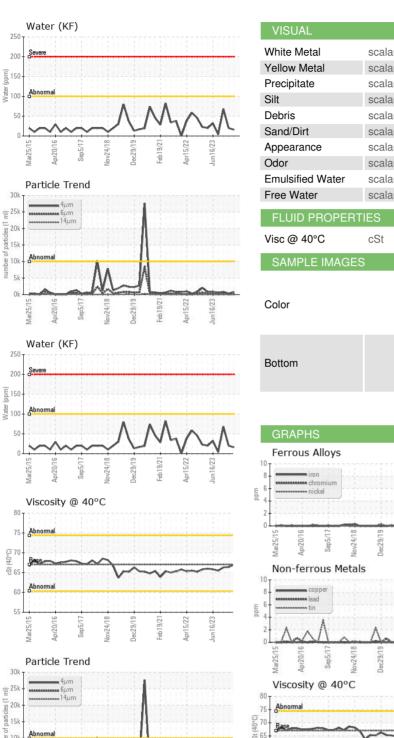




Particle Count 491 52 122,88 30.72 20 8 eb19/2 1406 Der 1,920 6661 480 120 30 eb 19/2 Acid Number (B/HOX BW) Abn 0.0 60 P 0.00 55 Feb 19/21 Jun16/23 pr15/22 ec29/19 Feb 19/21 Apr15/22 91/96-2 PD5/17 024/18 1241 pr20/1 Aar75 Aar75 : WearCheck USA - 501 Madison Ave., Cary, NC 27513 **CONAGRA FOODS** : USP0011816 Received : 16 May 2024 801 DYE MILL ROAD Tested : 06181398 : 20 May 2024 TROY, OH

: 20 May 2024 - Jonathan Hester



10

5



eb19/2

Test Package : IND 2 To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Diagnosed

Report Id: CONTROUSP [WUSCAR] 06181398 (Generated: 05/20/2024 11:47:01) Rev: 1

Contact/Location: MIKE WEAVER - CONTROUSP

Page 2 of 2

US 45373

T:

F:

Contact: MIKE WEAVER

mike.weaver@conagrafoods.com