

OIL ANALYSIS REPO

SAMPLE INFOR

Sample Number

Sample Date

Machine Age

Oil Changed

Sample Status

WEAR METALS

Oil Age

Iron

Nickel

Silver

Titanium

Aluminum Lead Copper Tin Vanadium Cadmium

Chromium

Area **ENGINE ROOM 2** ER2 SC101 (S/N TDSH193L3287D)

Refrigeration Compressor USPI 1009-68 SC (40 GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample. NOT RUNNING

Wear

All component wear rates are normal.

Contamination

Moderate concentration of visible dirt/debris present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sample Rating Trend								
MATION	method	limit/base	current	history1	history2			
	Client Info		USP0011814	USP0006161	USP0006867			
	Client Info		14 May 2024	19 Mar 2024	15 Feb 2024			
hrs	Client Info		2110	2110	2108			
hrs	Client Info		0	0	0			
	Client Info		N/A	N/A	N/A			
			ABNORMAL	ABNORMAL	ABNORMAL			
	method	limit/base	current	history1	history2			
ppm	ASTM D5185m	>8	0	<1	0			
ppm	ASTM D5185m	>2	<1	<1	0			
ppm	ASTM D5185m		0	0	<1			
ppm	ASTM D5185m		0	0	0			
ppm	ASTM D5185m	>2	0	0	0			
ppm	ASTM D5185m	>3	0	0	0			
ppm	ASTM D5185m	>2	0	0	0			
ppm	ASTM D5185m	>8	<1	1	0			
ppm	ASTM D5185m	>4	0	0	<1			
ppm	ASTM D5185m		0	0	0			
ppm	ASTM D5185m		0	0	0			
	method	limit/base	current	history1	history2			
ppm	ASTM D5185m		0	0	0			

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m		0	0	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		0	0	0
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m	50	0	0	15
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0	<1	0
Sodium	ppm	ASTM D5185m		<1	<1	<1
Potassium	ppm	ASTM D5185m	>20	0	0	<1
Water	%	ASTM D6304	>0.01	0.003	0.002	0.003
ppm Water	ppm	ASTM D6304	>100	37	20	33
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000		A 31319	
Particles >6µm		ASTM D7647	>2500		6 436	
Particles >14µm		ASTM D7647	>320		181	
Particles >21µm		ASTM D7647	>80		28	
Particles >38µm		ASTM D7647	>20		0	
Particles >71µm		ASTM D7647	>4		0	
Oil Cleanliness		ISO 4406 (c)	>20/18/15		2 2/20/15	

limit/base

current

0.014

Acid Number (AN)

FLUID DEGRADATION

method mg KOH/g ASTM D974 0.005

0.014


history1


history2


0.014



OIL ANALYSIS REPORT

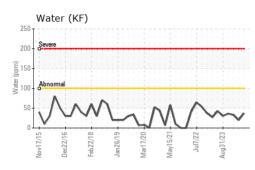






VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	A MODER
Debris	scalar	*Visual	NONE	🔺 MODER	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.01	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	67	67.2	67.2	66.8
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color				A.		3. 11

Bottom

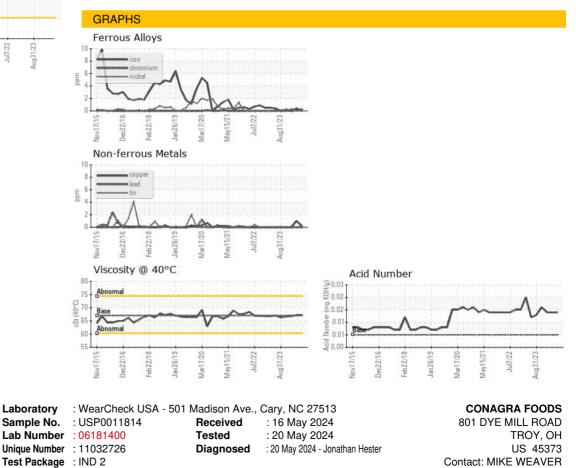

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: CONTROUSP [WUSCAR] 06181400 (Generated: 05/20/2024 11:47:33) Rev: 1

Certificate 12367

Contact/Location: MIKE WEAVER - CONTROUSP

mike.weaver@conagrafoods.com

T:

F: