

OIL ANALYSIS REPORT

Sample Rating Trend

······

NORMAL

Area ENGINE ROOM 2 Machine to ER2 SC105 (S/N F0328ZFMNTHGA03)

Refrigeration Compressor Fluid USPI 1009-68 SC (95 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


| SAMPLE INFORM | | method | limit/base | current | history1 | history2 |
|------------------|----------|--------------|------------|-------------|-------------|-------------|
| Sample Number | | Client Info | | USP0011826 | USP0006868 | USP0004073 |
| Sample Date | | Client Info | | 14 May 2024 | 15 Feb 2024 | 22 Nov 2023 |
| Machine Age | hrs | Client Info | | 75021 | 73881 | 72918 |
| Oil Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | 1110 | Client Info | | N/A | 0 N/A | 0 N/A |
| Sample Status | | | | NORMAL | ATTENTION | NORMAL |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >8 | 0 | 0 | 0 |
| Chromium | ppm | ASTM D5185m | >2 | <1 | 0 | <1 |
| Nickel | ppm | ASTM D5185m | | 0 | <1 | 0 |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >2 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | | 0 | 0 | <1 |
| Lead | ppm | ASTM D5185m | >2 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185m | . = | <1 | 0 | 0 |
| Tin | ppm | ASTM D5185m | >4 | 0 | <1 | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Barium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Magnesium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Calcium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Phosphorus | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Zinc | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Sulfur | ppm | ASTM D5185m | 50 | 0 | 22 | 0 |
| CONTAMINANTS | \$ | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >15 | 0 | 0 | 0 |
| Sodium | ppm | ASTM D5185m | | <1 | <1 | 0 |
| Potassium | ppm | ASTM D5185m | >20 | 0 | <1 | <1 |
| Water | % | ASTM D6304 | >0.01 | 0.003 | 0.002 | 0.007 |
| ppm Water | ppm | ASTM D6304 | >100 | 26 | 22 | 79 |
| FLUID CLEANLIN | IESS | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | >10000 | 6539 | 13764 | 6063 |
| Particles >6µm | | ASTM D7647 | >2500 | 1119 | 2570 | 1517 |
| Particles >14µm | | ASTM D7647 | >320 | 19 | 47 | 46 |
| Particles >21µm | | ASTM D7647 | >80 | 3 | 6 | 6 |
| Particles >38µm | | ASTM D7647 | >20 | 0 | 0 | 0 |
| Particles >71µm | | ASTM D7647 | >4 | 0 | 0 | 0 |
| Oil Cleanliness | | ISO 4406 (c) | >20/18/15 | 20/17/11 | 21/19/13 | 20/18/13 |
| FLUID DEGRADA | ATION | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D974 | 0.005 | 0.014 | 0.028 | 0.013 |
| | | | | | | |


Report Id: CONTROUSP [WUSCAR] 06181404 (Generated: 05/20/2024 12:19:59) Rev: 1


Contact/Location: MIKE WEAVER - CONTROUSP




OIL ANALYSIS REPORT










55

| VISUAL | | method | limit/base | current | history1 | history2 |
|------------------|--------|-----------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.01 | NEG | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG | NEG |
| FLUID PROPERT | IES | method | limit/base | current | history1 | history2 |
| Visc @ 40°C | cSt | ASTM D445 | 67 | 66.5 | 65.9 | 66.1 |
| SAMPLE IMAGES | 6 | method | limit/base | current | history1 | history2 |
| Color | | | | • | | |
| Bottom | | | | | | |

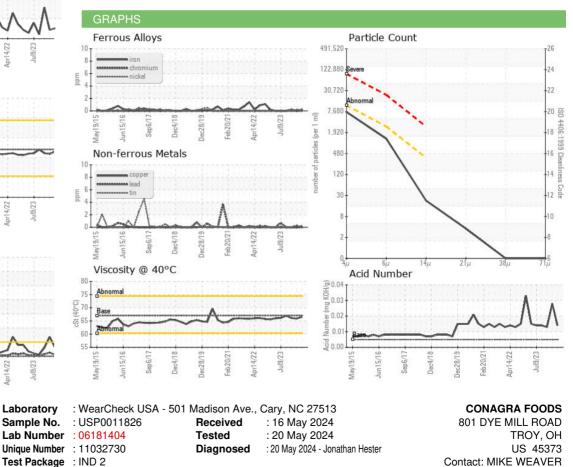

Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: CONTROUSP [WUSCAR] 06181404 (Generated: 05/20/2024 12:19:59) Rev: 1

Contact/Location: MIKE WEAVER - CONTROUSP

mike.weaver@conagrafoods.com

Т:

F: