




OIL ANALYSIS REPORT

Sample Rating Trend

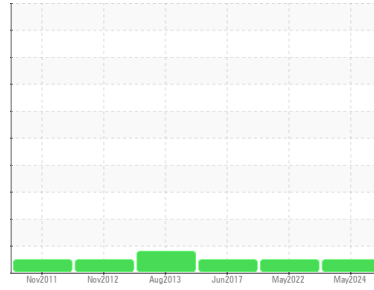

NORMAL



Machine Id
ALSTOM R004
 Component
Gearbox
 Fluid
TOTAL CARTER SH 220 (3 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0798734	WC0649710	WCM2299133
Sample Date	Client Info		13 May 2024	14 May 2022	16 Jun 2017
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	142	136	59
Chromium	ppm	ASTM D5185m >10	1	<1	<1
Nickel	ppm	ASTM D5185m >10	<1	0	<1
Titanium	ppm	ASTM D5185m	<1	<1	0
Silver	ppm	ASTM D5185m	<1	0	0
Aluminum	ppm	ASTM D5185m >25	3	3	2
Lead	ppm	ASTM D5185m >50	6	3	<1
Copper	ppm	ASTM D5185m >200	71	45	24
Tin	ppm	ASTM D5185m >10	1	<1	0
Antimony	ppm	ASTM D5185m >5	---	---	<1
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	<1	0	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<1	2	<1
Barium	ppm	ASTM D5185m	<1	0	<1
Molybdenum	ppm	ASTM D5185m	<1	0	0
Manganese	ppm	ASTM D5185m	3	1	<1
Magnesium	ppm	ASTM D5185m	2	1	0
Calcium	ppm	ASTM D5185m	10	6	3
Phosphorus	ppm	ASTM D5185m	367	360	207
Zinc	ppm	ASTM D5185m	143	119	37
Sulfur	ppm	ASTM D5185m	2911	2374	2534

CONTAMINANTS



	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	15	35	15
Sodium	ppm	ASTM D5185m	13	28	21
Potassium	ppm	ASTM D5185m >20	2	1	4

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.47	0.53	0.279



OIL ANALYSIS REPORT

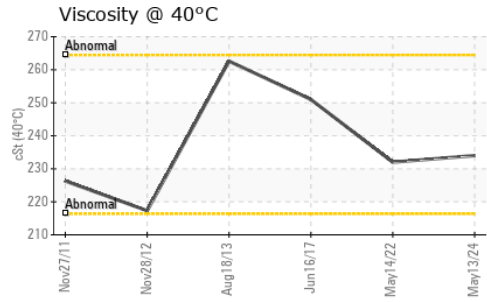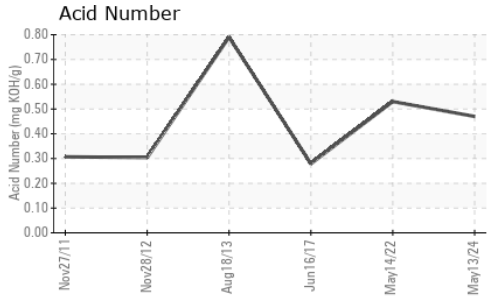









VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	234	232	251.0

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

GRAPHS

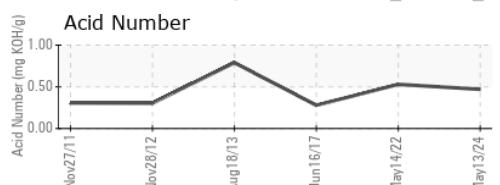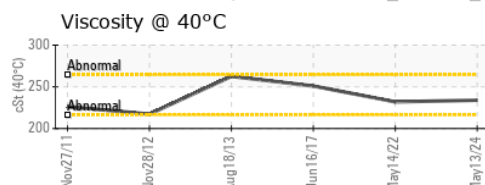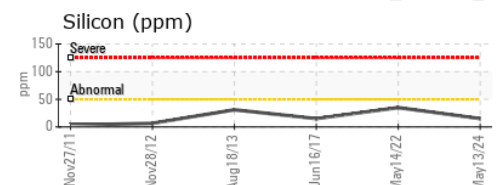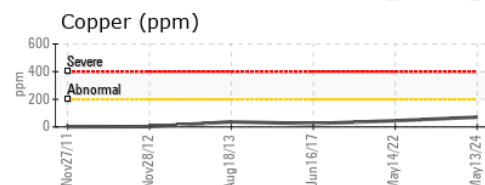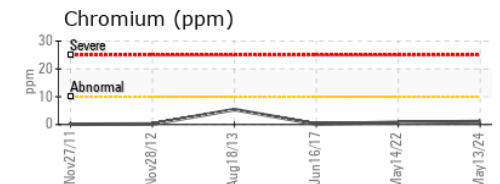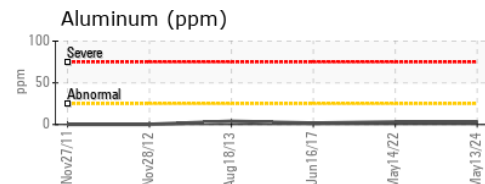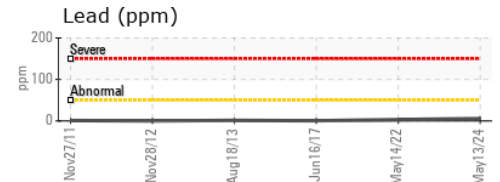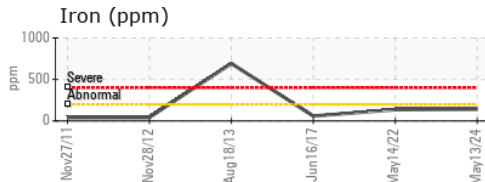

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0798734 **Received** : 16 May 2024
Lab Number : **06181485** **Tested** : 17 May 2024
Unique Number : 11032811 **Diagnosed** : 17 May 2024 - Wes Davis
Test Package : MOB 2

AMTRAK
 1401 W STREET NE, HIGH SPEED RAIL 2ND FLOOR
 WASHINGTON, DC
 US 20018
 Contact: MICHAEL PORTER
 michael.porter@amtrak.com
 T: (202)870-1399
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)