

## **OIL ANALYSIS REPORT**

### Area [24011] COMBO GEAR FLUSH USS WICHITA

Lube System Fluid TEP 2190 (1500 GAL)

#### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please note that this is a corrected copy for laboratory data updates to add PC data.

#### Wear


All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





NORMAL

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0938948		
Sample Date		Client Info		14 May 2024		
Machine Age	hrs	Client Info		40		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		12		
Iron	ppm	ASTM D5185m	>20	0		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		<1		
Aluminum	ppm	ASTM D5185m	>20	0		
Lead	ppm		>20	0		
Copper	ppm	ASTM D5185m	>20	<1		
Tin	ppm	ASTM D5185m		0		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
	le le constante de la constante de		11 11 11		11.1	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		<1		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		4		
Phosphorus	ppm	ASTM D5185m		61		
Zinc	ppm	ASTM D5185m		6		
Sulfur	ppm	ASTM D5185m		12		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1		
Sodium	ppm	ASTM D5185m		<1		
Potassium	ppm	ASTM D5185m	>20	1		
Water	%	ASTM D6304	>0.05	NEG		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	493		
Particles >6µm		ASTM D7647	>1300	107		
Particles >14µm		ASTM D7647	>160	4		
Particles >21µm		ASTM D7647	>40	0		
Particles >38µm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	16/14/9		
FLUID DEGRADA	TION	method				history2

Contact/Location: VERONICA BLAKLEY - HYDJAC Page 1 of 2

Sample Rating Trend



20

# **OIL ANALYSIS REPORT**

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

NEG

NEG

79.49

Particle Count

Acid Number

491,52

122,88

30.72 7.68

1.920

480

120

30

(<sup>0.30</sup> (<sup>0</sup>/HOX)

Ê0.18

ੂੰ 0.12

0.06 Acid

0.00

174

Mav1

no image

no image


no image

no imade

4406

:1999 Cle

14

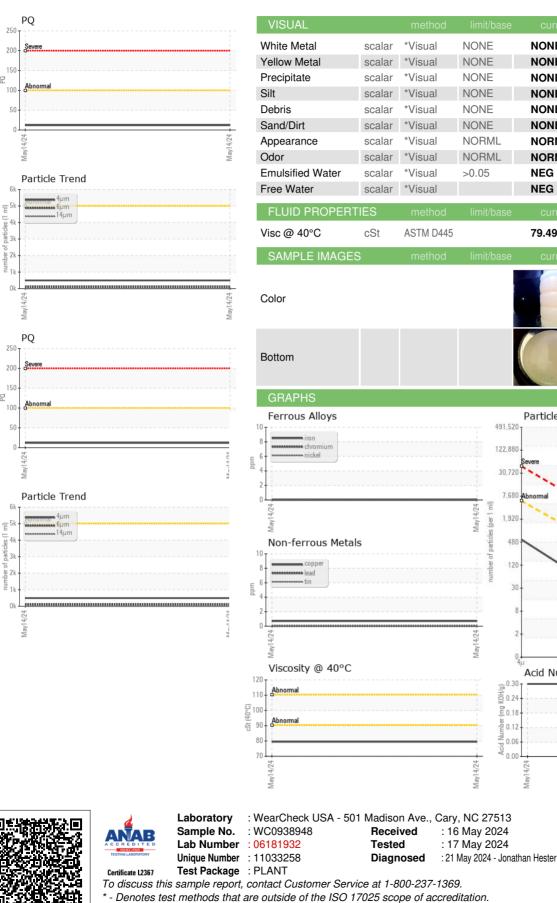

3919 PHILLIPS HWY JACKSONVILLE, FL US 32207 Contact: VERONICA BLAKLEY VBLAKLEY@HYDRADYNELLC.COM T: (904)239-4108 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) E:

Report Id: HYDJAC [WUSCAR] 06181932 (Generated: 05/21/2024 09:27:10) Rev: 2

Contact/Location: VERONICA BLAKLEY - HYDJAC

Page 2 of 2

HYDRODYNE LLC