

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

Area **L13** Machine Id **MAZAK 310001 - TABLE** Component Chiller Fluid MOBIL SHC 626 (9 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		FCH0000081		
Sample Date		Client Info		09 May 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
CONTAMINATION	N	method	limit/base	current	history1	history2
Water		WC Method	>0.01	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	3		
Chromium	ppm	ASTM D5185m	>2	0		
Nickel	ppm	ASTM D5185m		0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>2	<1		
Aluminum	ppm	ASTM D5185m	>3	0		
Lead	ppm	ASTM D5185m	>2	<1		
Copper	ppm	ASTM D5185m	>8	<1		
Tin	ppm	ASTM D5185m	>4	0		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		0		
Calcium	ppm	ASTM D5185m		0		
Phosphorus	ppm	ASTM D5185m		371		
Zinc	ppm	ASTM D5185m		0		
Sulfur	ppm	ASTM D5185m		302		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m		2		
Sodium	ppm	ASTM D5185m		1		
Potassium	ppm	ASTM D5185m	>20	<1		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	6483		
Particles >6µm		ASTM D7647	>2500	595		
Particles >14µm		ASTM D7647	>320	7		
Particles >21µm		ASTM D7647	>80	1		
Particles >38µm		ASTM D7647	>20	1		
Particles >71µm		ASTM D7647		1		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	20/16/10		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
FLUID DEGRADA Acid Number (AN)	TION mg KOH/g	method ASTM D8045	limit/base	current 0.48	history1	history2

Report Id: UCDANLAF [WUSCAR] 06181959 (Generated: 05/20/2024 07:12:12) Rev: 1

Submitted By: Wes Davis Page 1 of 2



OIL ANALYSIS REPORT

scalar

scalar

scalar

scalar

scalar

scalar

scalar

scalar

cSt

*Visual

*Visual

*Visual

*Visual

*Visual

*Visual

*Visual

*Visual

ASTM D445

scalar *Visual

scalar *Visual

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

>0.01

69.9

Mav9/24

White Metal

Yellow Metal

Precipitate

Silt

Debris

Odor

Sand/Dirt

Appearance

Free Water

Visc @ 40°C

Emulsified Water

FLUID PROPERTIES

NONE

NONE

NONE

NONE

NONE

NONE


NORML


NORML


NEG

NEG

67.5








er of 1 41

> 2 n, 0/8/vel/

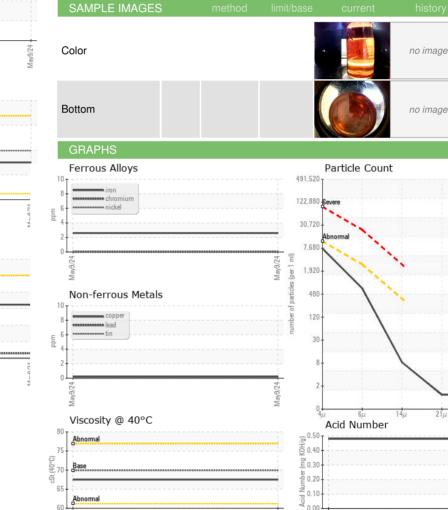

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513 DANA - FAIRFIELD CUSTOM GEARS AND DRIVES Sample No. : FCH0000081 Received : 16 May 2024 2400 SAGAMORE PKWY S #2400 Lab Number : 06181959 Tested : 20 May 2024 LAFAYETTE, IN Unique Number : 11033285 Diagnosed : 20 May 2024 - Wes Davis US 47905 Test Package : PLANT Contact: Service Manager Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369. Jeffrey.Alexander@fuchs.com * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. T:

P/vel/

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F:

38,4

214

no image

no imade

4406

:1999 Cle

14