

OIL ANALYSIS REPORT

Sample Rating Trend

ISO

Area **L15** Machine Id **MAZAK 309601** Component Chiller Fluid MOBIL SHC 626 (9 GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 6 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	ΛΑΤΙΟΝ	method	limit/base		history1	history2
Sample Number		Client Info		FCH0000092		
Sample Date		Client Info		13 May 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ATTENTION		
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.01	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	2		
Chromium	ppm	ASTM D5185m	>2	0		
Nickel	ppm	ASTM D5185m		0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>2	<1		
Aluminum	ppm	ASTM D5185m	>3	<1		
Lead	ppm	ASTM D5185m	>2	0		
Copper	ppm	ASTM D5185m	>8	<1		
Tin	ppm	ASTM D5185m	>4	0		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		0		
Calcium	ppm	ASTM D5185m		0		
Phosphorus		ASTM D5185m		370		
Zinc	ppm	ASTM D5185m		370		
Sulfur	ppm	ASTM D5185m		3 2057		
	ppm					
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	9		
Sodium	ppm	ASTM D5185m		3		
Potassium	ppm	ASTM D5185m	>20	<1		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	<mark>)</mark> 16164		
Particles >6µm		ASTM D7647		1996		
Particles >14µm		ASTM D7647	>320	37		
Particles >21µm		ASTM D7647		11		
Particles >38µm		ASTM D7647	>20	2		
Particles >71µm		ASTM D7647	>4	0		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	e 21/18/12		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.36		
9:37:07) Rev: 1	- 0			Submit	ted By: FUCHS	Smart Services

Report Id: UCDANLAF [WUSCAR] 06181966 (Generated: 05/21/2024 09:37:07) Rev: 1

Submitted By: FUCHS Smart Services Page 1 of 2



OIL ANALYSIS REPORT

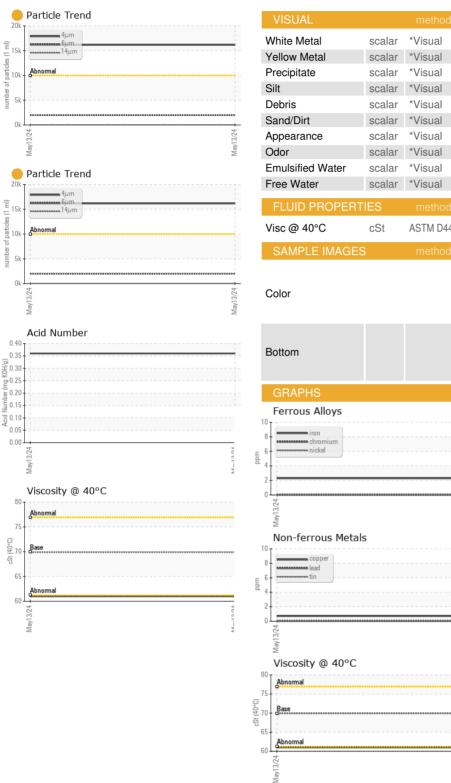



Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513 DANA - FAIRFIELD CUSTOM GEARS AND DRIVES Sample No. : FCH0000092 Received : 16 May 2024 2400 SAGAMORE PKWY S #2400 Lab Number : 06181966 Tested : 21 May 2024 LAFAYETTE, IN Unique Number : 11033292 Diagnosed : 21 May 2024 - Jonathan Hester US 47905 Test Package : PLANT Contact: Service Manager Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369. Jeffrey.Alexander@fuchs.com * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. T: F:

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: UCDANLAF [WUSCAR] 06181966 (Generated: 05/21/2024 09:37:08) Rev: 1

Submitted By: FUCHS Smart Services Page 2 of 2