




OIL ANALYSIS REPORT

Sample Rating Trend

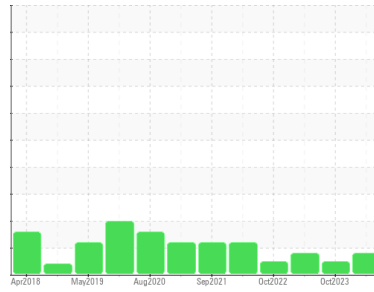

ISO



Machine Id
KAESER BS 61 0497100016 (S/N 5103146)
 Component
Compressor
 Fluid
KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			KC128406	KC06005595	KCP54866
Sample Date	Client Info			19 Mar 2024	02 Oct 2023	28 Mar 2023
Machine Age	hrs	Client Info		22668	22664	22648
Oil Age	hrs	Client Info		4	0	267
Oil Changed	Client Info			Not Chngd	N/A	Changed
Sample Status				ABNORMAL	NORMAL	ATTENTION

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	0	2
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	<1	<1
Lead	ppm	ASTM D5185m	>10	<1	0	0
Copper	ppm	ASTM D5185m	>50	<1	0	<1
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	90	38	41	38
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m	100	81	63	85
Calcium	ppm	ASTM D5185m	0	0	0	2
Phosphorus	ppm	ASTM D5185m	0	0	0	3
Zinc	ppm	ASTM D5185m	0	0	0	7

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	1	<1	<1
Sodium	ppm	ASTM D5185m		10	6	10
Potassium	ppm	ASTM D5185m	>20	2	2	1
Water	%	ASTM D6304	>0.05	0.027	0.021	0.018
ppm Water	ppm	ASTM D6304	>500	272	215.7	185.9

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		29563	3237	16905
Particles >6µm		ASTM D7647	>1300	▲ 4793	743	● 1991
Particles >14µm		ASTM D7647	>80	65	43	74
Particles >21µm		ASTM D7647	>20	9	14	14
Particles >38µm		ASTM D7647	>4	4	2	1
Particles >71µm		ASTM D7647	>3	3	0	0
Oil Cleanliness		ISO 4406 (c)	>--/17/13	▲ 22/19/13	19/17/13	● 21/18/13

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.34	0.32	0.33

OIL ANALYSIS REPORT

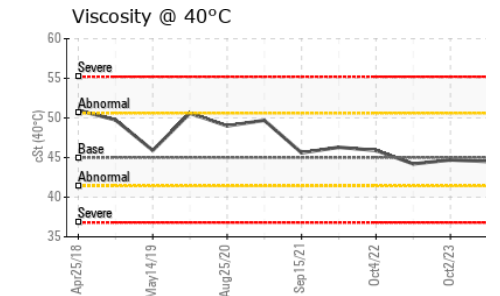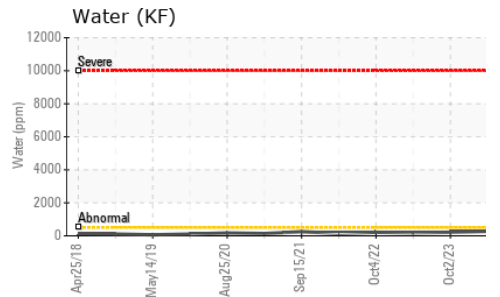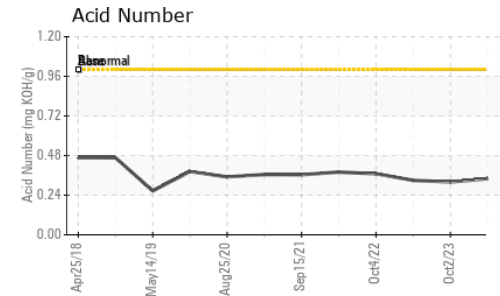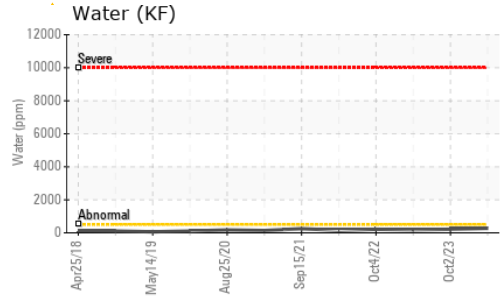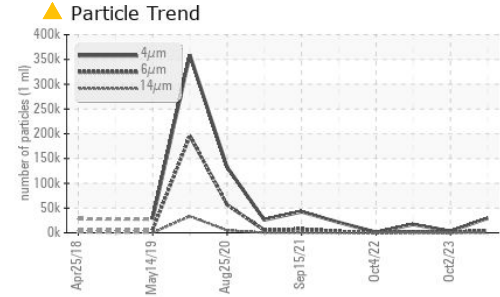






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	44.5	44.7

SAMPLE IMAGES

method	limit/base	current	history1	history2
Color				
Bottom				

GRAPHS

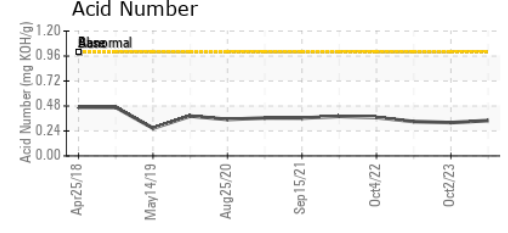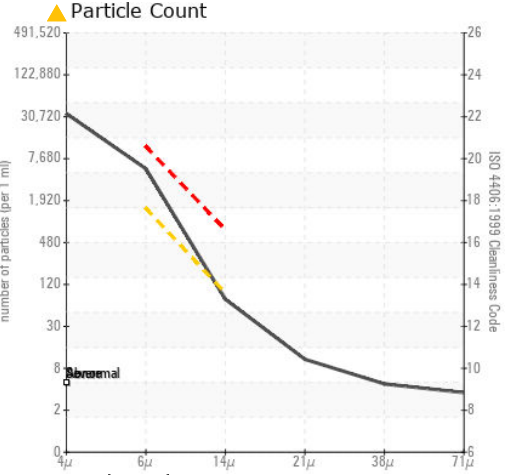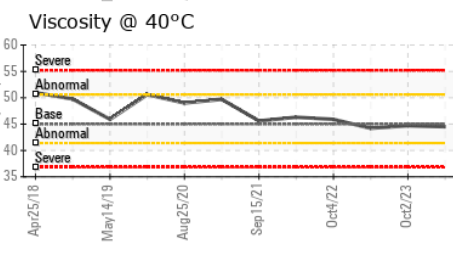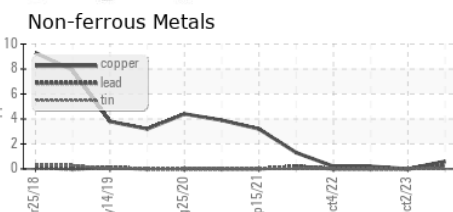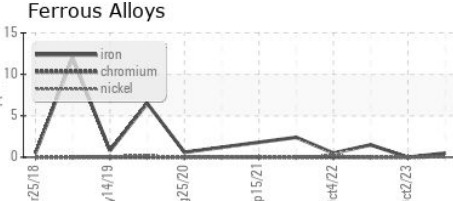

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KC128406
Lab Number : 06182001
Unique Number : 11033327
Test Package : IND 2
Received : 16 May 2024
Tested : 20 May 2024
Diagnosed : 20 May 2024 - Don Baldrige

BAR PROCESSING
 550 TERNES DR
 MONROE, MI
 US 48162
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)