

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

7231204 (S/N 2558)

Component Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA012402	KCPA008641	KCPA005020
Sample Date		Client Info		10 May 2024	08 Jan 2024	28 Jun 2023
Machine Age	hrs	Client Info		25099	22266	18319
Oil Age	hrs	Client Info		5150	0	0
Oil Changed		Client Info		Changed	N/A	N/A
Sample Status				ATTENTION	ATTENTION	ATTENTION
· ·						
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	<1	<1	0
Nickel	ppm	ASTM D5185m	>3	0	<1	<1
Titanium	ppm	ASTM D5185m	>3	0	<1	0
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>10	0	2	0
Lead	ppm	ASTM D5185m	>10	<1	<1	<1
Copper	ppm	ASTM D5185m	>50	8	13	3
Tin	ppm	ASTM D5185m	>10	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	0
Cadmium	ppm	ASTM D5185m		0	<1	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m		0	<1	14
Molybdenum	ppm	ASTM D5185m	0	0	<1	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	100	24	5	35
Calcium	ppm	ASTM D5185m		0	3	0
Phosphorus	ppm	ASTM D5185m	0	0	3	<1
Zinc	ppm	ASTM D5185m		0	8	2
Sulfur	ppm	ASTM D5185m	23500	22886	19148	19019
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon			>25	2	2	2
Sodium	ppm ppm	ASTM D5185m	>20	14	2	9
Potassium	ppm		>20	2	1	1
Water	%	ASTM D510301	>0.05	0.012	0.008	0.011
ppm Water	ppm	ASTM D0304 ASTM D6304		121	80	111.0
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		6916	4939	3980
Particles >6µm		ASTM D7647		1698	869	1087
Particles >14µm		ASTM D7647	>80	40	135	117
Particles >21µm		ASTM D7647		7	37	33
Particles >38µm		ASTM D7647	>4	1	1	1
Particles >71µm		ASTM D7647		1	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	e 20/18/12	9/17/14	9/17/14
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.29	0.30	0.30



OIL ANALYSIS REPORT

(B)0.96 (D)HOX wmper Mmper 48.0 M	Basermal				Bott
E 0.72					
aquinno 1990. Munno					
0.00					GI Fe
0.00	Jan 23/23	Jun28/23 -	Jan 8/24 .	NC. O.L. MA	8
12000	Water (KF)				4 4
10000 (m. 8000					Jan23/23
(bbm) Adder (bbm) Adder (bbm)					No 15 T
2000	Abnormal	2	4		10- m
	Jan 23/23	Jun28/23	Jan 8/24	ACO MA	5
60	Viscosity @ 40)°C			Jan 23/23
55	Severe				60 L 00
(0.0 6) tS3	Abnormal				55 Se 2 50 Ab
र्छ रह 45	Abnormal				€ Ba
40	+				40 Se
35	Severe	+	+	-	
	Jan 23/2.	Jun28/2:	Jan 8/2 ⁴	40/U [Jan 23/23
35	Jan 23/23 +	Jun28/23 +	Labor	NCO FW	

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	44.9	44.3	44.8
SAMPLE IMAGES	3	method	limit/base	current	history1	history2
Color						
Bottom						

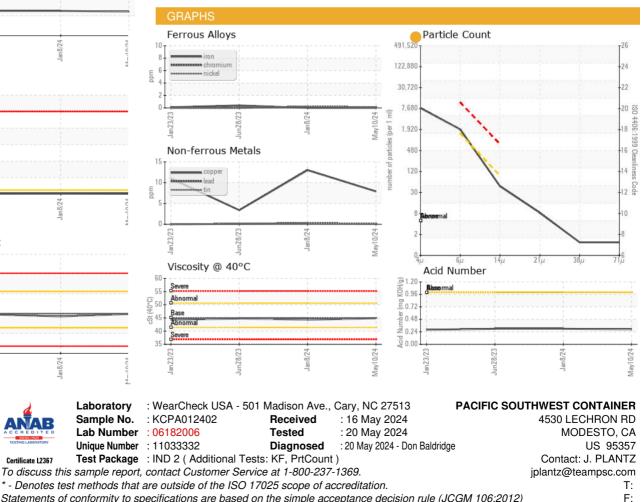

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate 12367

Contact/Location: J. PLANTZ - PACMOD