

## **OIL ANALYSIS REPORT**

Sample Rating Trend



Machine Id

# KAESER SM 15T 4578184 (S/N 1105)

Component Compressor

Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM		method	limit/bass	ourropt	biotomut	biotory ()
	ATION		limit/base	current	history1	history2
Sample Number		Client Info		KCPA015334	KCPA005960	KCP27804
Sample Date		Client Info		24 Apr 2024	17 Aug 2023	19 Jan 2021
Machine Age	hrs	Client Info		13008	11418	11343
Oil Age	hrs	Client Info		1590	0	28
Oil Changed		Client Info		Not Changd	N/A	Not Changd
Sample Status				NORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	<1	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	0	0
Lead	ppm	ASTM D5185m	>10	0	<1	<1
Copper	ppm	ASTM D5185m	>50	2	2	3
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	<1
Barium	ppm	ASTM D5185m	90	22	10	13
Molybdenum	ppm	ASTM D5185m	30	0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Manganesium	ppm	ASTM D5185m	90	66	33	20
Calcium	ppm	ASTM D5185m		0	<1	0
Phosphorus	ppm	ASTM D5185m	2	0	5	5
Zinc	ppm	ASTM D5185m		0	12	0
Sulfur	ppm	ASTM D5185m		23045	20160	17474
			1			
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	1	<1	<1
Sodium	ppm	ASTM D5185m		23	4	0
Potassium	ppm	ASTM D5185m		3	1	<1
Water	%	ASTM D6304		0.026	▲ 0.190	▲ 0.176
ppm Water	ppm	ASTM D6304	>500	267	<u> </u>	1760
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		4960		
Particles >6µm		ASTM D7647	>1300	1111		
Particles >14µm		ASTM D7647	>80	35		
Particles >21µm		ASTM D7647	>20	12		
Particles >38µm		ASTM D7647	>4	8		
Particles >71µm		ASTM D7647		6		
Oil Cleanliness		ISO 4406 (c)	>/17/13	19/17/12		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.34	0.333	0.161


Report Id: BOSCHA [WUSCAR] 06182007 (Generated: 05/20/2024 13:02:17) Rev: 1


Contact/Location: Service Manager - BOSCHA Page 1 of 2




# **OIL ANALYSIS REPORT**

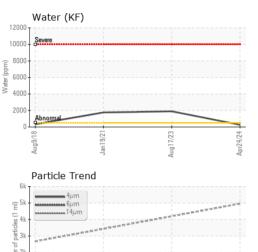




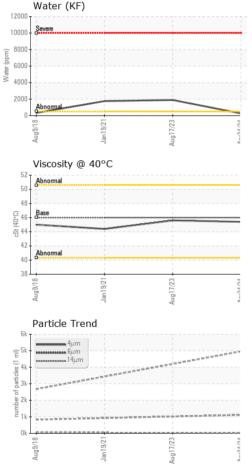

VISUAL		method				history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	A HEAVY	🔺 MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	- HAZY
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	▲ 0.2%	▲ 0.2%
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	45.4	45.6	44.4
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						
Bottom					63.	

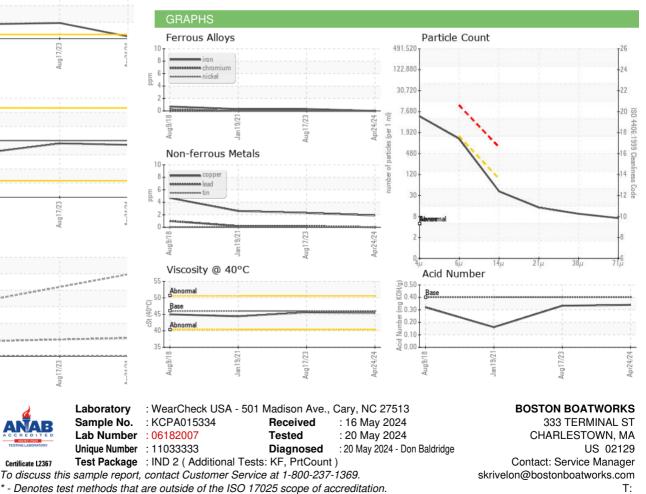



Certificate 12367

Contact/Location: Service Manager - BOSCHA

F: