




OIL ANALYSIS REPORT

Sample Rating Trend

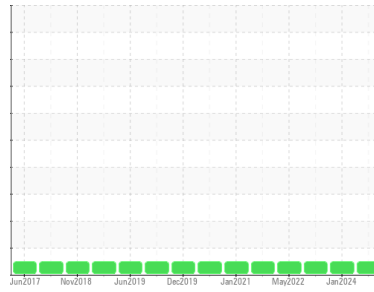

NORMAL



Area

KANSAS/44/Sh-Bulk Tanks

Machine Id

Shop 3 Tanks [KANSAS^44^Sh-Bulk Tanks]

Component

4 Hydraulic System

Fluid

MOBIL MOBILFLUID 424 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0918045	WC0862550	WC0746058
Sample Date	Client Info		10 May 2024	03 Jan 2024	17 Jan 2023
Machine Age	hrs	Client Info	6927	0	6927
Oil Age	hrs	Client Info	0	0	6927
Oil Changed	Client Info		Not Changed	Not Changed	Not Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	4	<1	2
Chromium	ppm	ASTM D5185m >10	2	<1	<1
Nickel	ppm	ASTM D5185m >10	2	0	<1
Titanium	ppm	ASTM D5185m	2	0	<1
Silver	ppm	ASTM D5185m	3	0	0
Aluminum	ppm	ASTM D5185m >10	3	2	<1
Lead	ppm	ASTM D5185m >10	3	0	<1
Copper	ppm	ASTM D5185m >75	3	0	0
Tin	ppm	ASTM D5185m >10	2	0	<1
Vanadium	ppm	ASTM D5185m	2	0	0
Cadmium	ppm	ASTM D5185m	2	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	121	101	77
Barium	ppm	ASTM D5185m	<1	0	0
Molybdenum	ppm	ASTM D5185m	3	0	2
Manganese	ppm	ASTM D5185m	2	0	<1
Magnesium	ppm	ASTM D5185m	22	18	30
Calcium	ppm	ASTM D5185m	3385	3286	3164
Phosphorus	ppm	ASTM D5185m	1047	1185	1019
Zinc	ppm	ASTM D5185m	1362	1373	1411
Sulfur	ppm	ASTM D5185m	4619	4869	4557

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	14	10	9
Sodium	ppm	ASTM D5185m	1	<1	<1
Potassium	ppm	ASTM D5185m >20	4	2	4

FLUID CLEANLINESS





	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		676	1252	614
Particles >6µm	ASTM D7647	>2500	78	275	94
Particles >14µm	ASTM D7647	>640	12	16	8
Particles >21µm	ASTM D7647	>160	9	4	2
Particles >38µm	ASTM D7647	>40	7	0	1
Particles >71µm	ASTM D7647	>10	7	0	0
Oil Cleanliness	ISO 4406 (c)	>--/18/16	17/13/11	17/15/11	16/14/10

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.85	0.74	1.04




OIL ANALYSIS REPORT

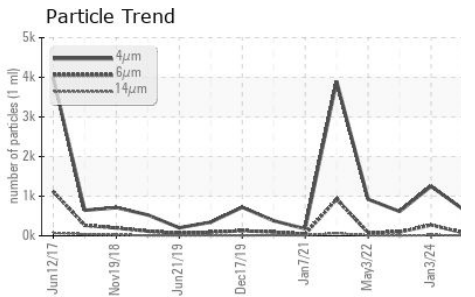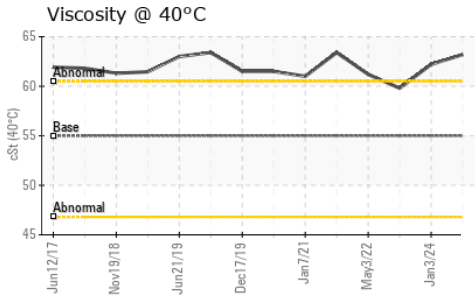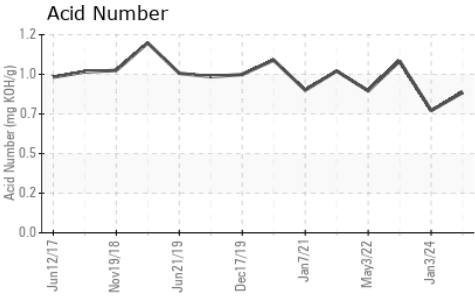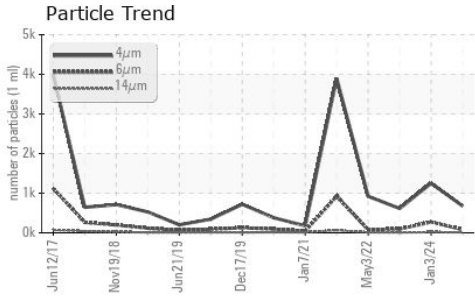






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	55	63.2	62.2	59.8

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

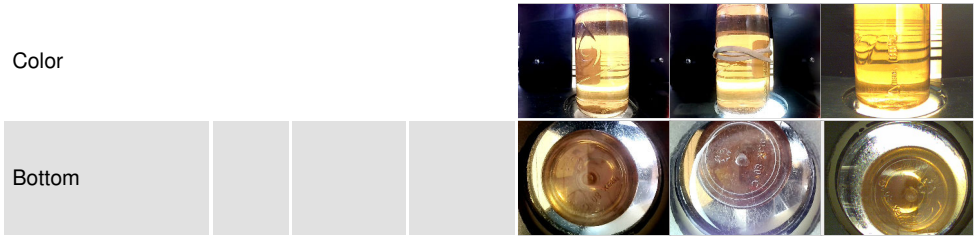

GRAPHS

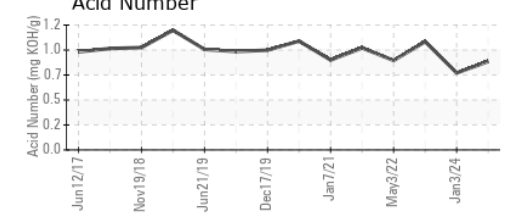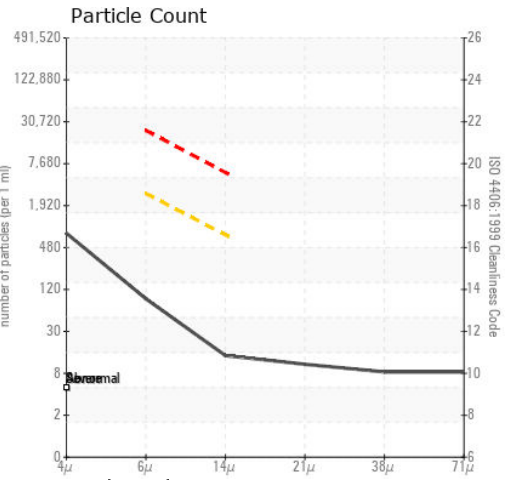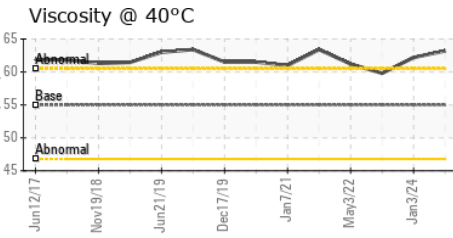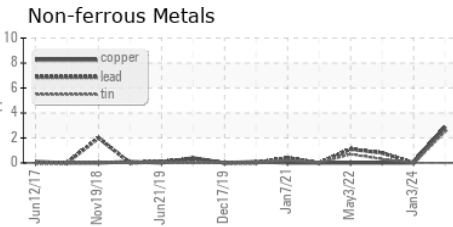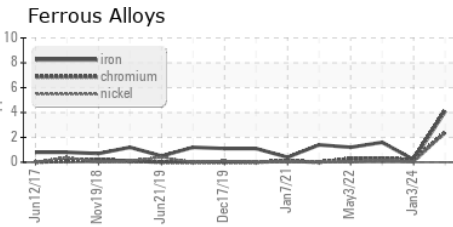

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0918045 **Received** : 17 May 2024
Lab Number : 06182723 **Tested** : 20 May 2024
Unique Number : 11034049 **Diagnosed** : 20 May 2024 - Wes Davis
Test Package : CONST

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: DOUG KING
 doug.king@sherwood.net
 T: (316)617-3161
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)