




# OIL ANALYSIS REPORT

Sample Rating Trend

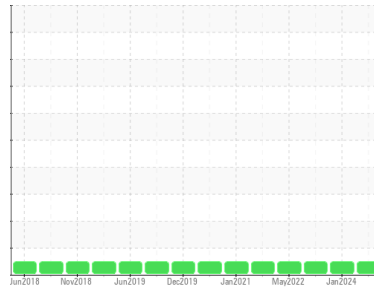

NORMAL



Area

KANSAS/44/Sh-Bulk Tanks

Machine Id

Shop 3 Tanks [KANSAS^44^Sh-Bulk Tanks]

Component

2 Hydraulic System

Fluid

MOBIL MOBILTRANS AST 30 (--- GAL)

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0918044	WC0821555	WC0746059
Sample Date	Client Info		10 May 2024	03 Jan 2024	17 Jan 2023
Machine Age	hrs	Client Info	6927	0	6927
Oil Age	hrs	Client Info	0	0	6927
Oil Changed	Client Info		Not Changed	Not Changed	Not Changed
Sample Status			NORMAL	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	5	<1	2
Chromium	ppm	ASTM D5185m >10	2	<1	<1
Nickel	ppm	ASTM D5185m >10	2	0	0
Titanium	ppm	ASTM D5185m	2	0	<1
Silver	ppm	ASTM D5185m	3	0	0
Aluminum	ppm	ASTM D5185m >10	3	2	<1
Lead	ppm	ASTM D5185m >10	3	0	<1
Copper	ppm	ASTM D5185m >75	3	<1	0
Tin	ppm	ASTM D5185m >10	2	0	<1
Vanadium	ppm	ASTM D5185m	2	0	0
Cadmium	ppm	ASTM D5185m	2	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	38	31	31
Barium	ppm	ASTM D5185m	1	0	0
Molybdenum	ppm	ASTM D5185m	3	<1	1
Manganese	ppm	ASTM D5185m	2	0	<1
Magnesium	ppm	ASTM D5185m	18	25	18
Calcium	ppm	ASTM D5185m	3079	2794	2783
Phosphorus	ppm	ASTM D5185m	1021	1021	897
Zinc	ppm	ASTM D5185m	1216	1157	1195
Sulfur	ppm	ASTM D5185m	5413	4869	4948

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	8	4	5
Sodium	ppm	ASTM D5185m	2	0	1
Potassium	ppm	ASTM D5185m >20	4	1	<1

## FLUID CLEANLINESS





	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		716	561	1733
Particles >6µm	ASTM D7647	>2500	68	87	150
Particles >14µm	ASTM D7647	>640	14	14	11
Particles >21µm	ASTM D7647	>160	10	6	2
Particles >38µm	ASTM D7647	>40	9	0	0
Particles >71µm	ASTM D7647	>10	8	0	0
Oil Cleanliness	ISO 4406 (c)	>--/18/16	17/13/11	16/14/11	18/14/11

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.74	1.54	1.45




# OIL ANALYSIS REPORT

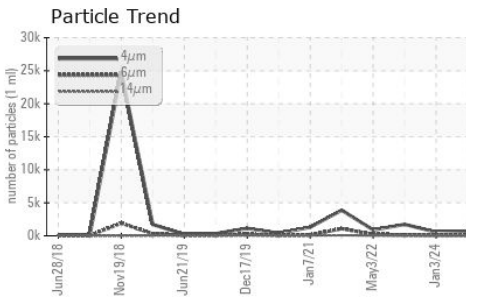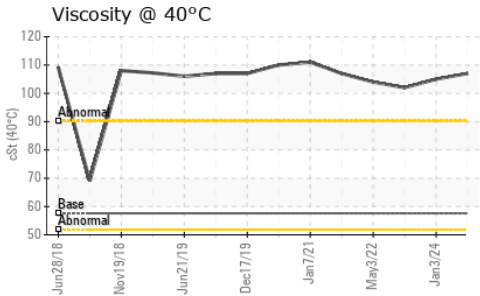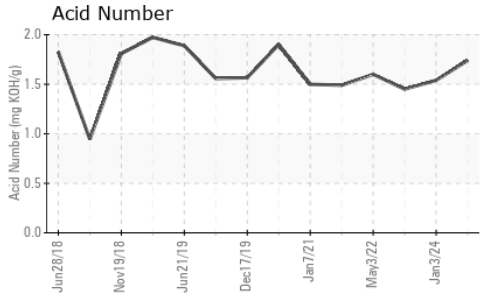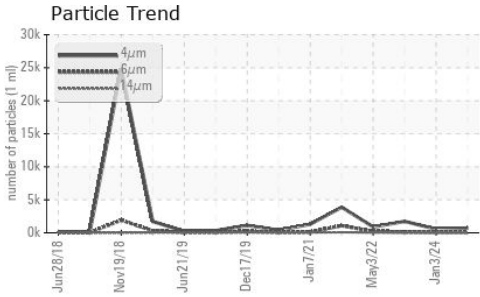






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	57.6	107	105.0

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

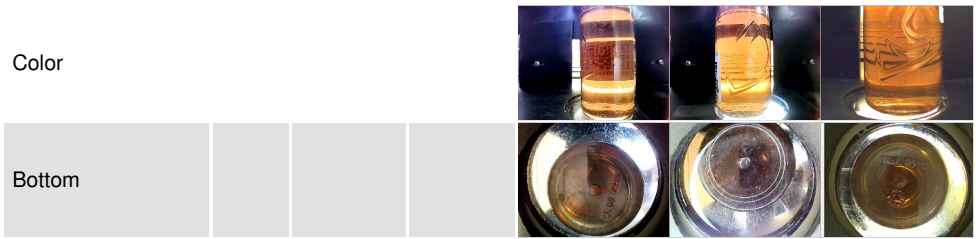

## GRAPHS

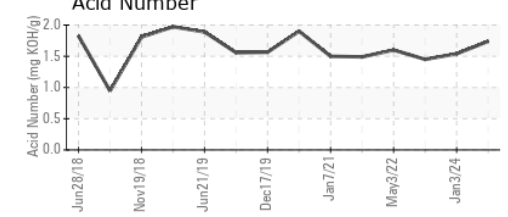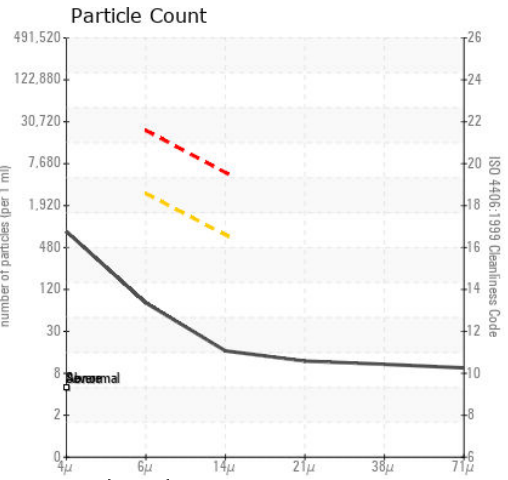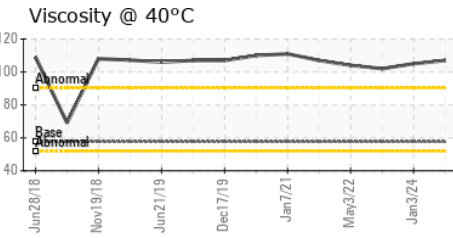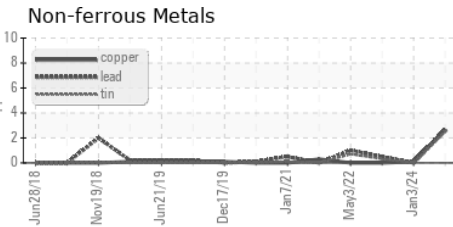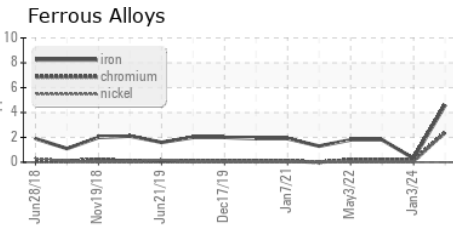

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0918044      **Received** : 17 May 2024  
**Lab Number** : 06182724      **Tested** : 20 May 2024  
**Unique Number** : 11034050      **Diagnosed** : 20 May 2024 - Wes Davis  
**Test Package** : CONST

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: DOUG KING  
 doug.king@sherwood.net  
 T: (316)617-3161  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)