




OIL ANALYSIS REPORT

Sample Rating Trend

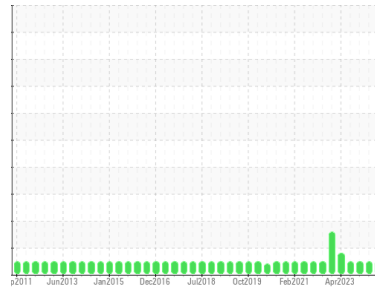

NORMAL



Area

PACK ROOM 166

Machine Id

B53521 - POWER UNIT - ALLPAX UNLOADER

Component

Hydraulic System

Fluid

PETRO CANADA PURITY FG AW HYDRAULIC 46 (40 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| method | limit/base | current | history1 | history2 |
|---------------|------------------|--------------------|-------------|-------------|
| Sample Number | Client Info | WC0907963 | WC0358826 | WC0842536 |
| Sample Date | Client Info | 16 May 2024 | 13 Feb 2024 | 12 Nov 2023 |
| Machine Age | mths Client Info | 0 | 0 | 0 |
| Oil Age | mths Client Info | 0 | 0 | 0 |
| Oil Changed | Client Info | N/A | N/A | N/A |
| Sample Status | | NORMAL | NORMAL | NORMAL |

CONTAMINATION

| method | limit/base | current | history1 | history2 |
|--------|-----------------|------------|----------|----------|
| Water | WC Method >0.05 | NEG | NEG | NEG |

WEAR METALS

| method | limit/base | current | history1 | history2 |
|----------|---------------------|--------------|----------|----------|
| Iron | ppm ASTM D5185m >20 | 2 | 1 | 2 |
| Chromium | ppm ASTM D5185m >20 | <1 | 0 | 0 |
| Nickel | ppm ASTM D5185m >20 | 0 | 0 | 0 |
| Titanium | ppm ASTM D5185m | <1 | 0 | 0 |
| Silver | ppm ASTM D5185m | <1 | 0 | 0 |
| Aluminum | ppm ASTM D5185m >20 | 0 | <1 | 0 |
| Lead | ppm ASTM D5185m >20 | 0 | 0 | 0 |
| Copper | ppm ASTM D5185m >20 | <1 | 0 | <1 |
| Tin | ppm ASTM D5185m >20 | <1 | 0 | 0 |
| Vanadium | ppm ASTM D5185m | 0 | 0 | 0 |
| Cadmium | ppm ASTM D5185m | 0 | 0 | 0 |

ADDITIVES

| method | limit/base | current | history1 | history2 |
|------------|-----------------|--------------|----------|----------|
| Boron | ppm ASTM D5185m | 0 | 0 | 0 |
| Barium | ppm ASTM D5185m | 0 | 0 | 0 |
| Molybdenum | ppm ASTM D5185m | 0 | 0 | 0 |
| Manganese | ppm ASTM D5185m | <1 | 0 | 0 |
| Magnesium | ppm ASTM D5185m | 0 | 0 | 0 |
| Calcium | ppm ASTM D5185m | 0 | 0 | 0 |
| Phosphorus | ppm ASTM D5185m | 405 | 425 | 402 |
| Zinc | ppm ASTM D5185m | 0 | 8 | 0 |
| Sulfur | ppm ASTM D5185m | 491 | 483 | 269 |

CONTAMINANTS

| method | limit/base | current | history1 | history2 |
|-----------|---------------------|--------------|----------|----------|
| Silicon | ppm ASTM D5185m >15 | 3 | 3 | 3 |
| Sodium | ppm ASTM D5185m | <1 | <1 | <1 |
| Potassium | ppm ASTM D5185m >20 | 0 | 0 | <1 |

FLUID CLEANLINESS

| method | limit/base | current | history1 | history2 |
|-----------------|------------------------|----------------|----------|----------|
| Particles >4µm | ASTM D7647 >5000 | 1691 | 2781 | 1803 |
| Particles >6µm | ASTM D7647 >1300 | 142 | 197 | 313 |
| Particles >14µm | ASTM D7647 >160 | 2 | 7 | 23 |
| Particles >21µm | ASTM D7647 >40 | 1 | 2 | 4 |
| Particles >38µm | ASTM D7647 >10 | 0 | 0 | 1 |
| Particles >71µm | ASTM D7647 >3 | 0 | 0 | 0 |
| Oil Cleanliness | ISO 4406 (c) >19/17/14 | 18/14/9 | 19/15/10 | 18/15/12 |


FLUID DEGRADATION

| method | limit/base | current | history1 | history2 |
|------------------|--------------------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g ASTM D8045 0.26 | 0.28 | 0.26 | 0.26 |




OIL ANALYSIS REPORT


Particle Trend

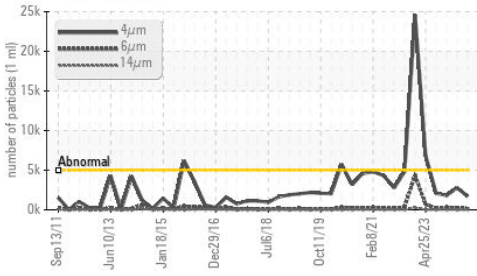


Acid Number

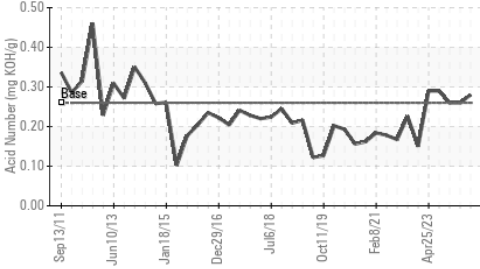

Viscosity @ 40°C

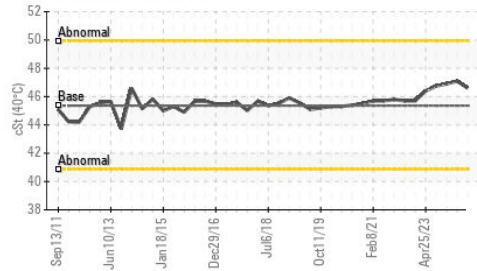

Particle Trend

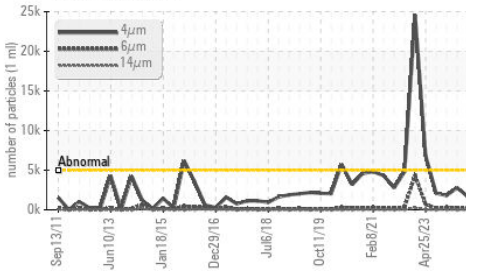


| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.05 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 | 45.36 | 46.6 | 47.1 |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|


Color

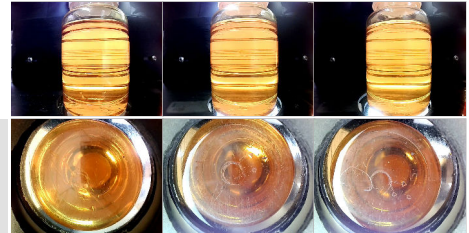


Bottom

GRAPHS


Ferrous Alloys

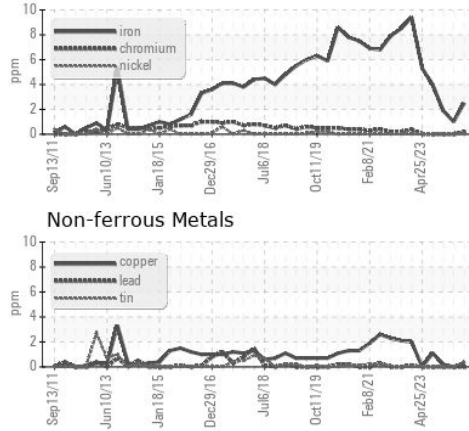


Non-ferrous Metals

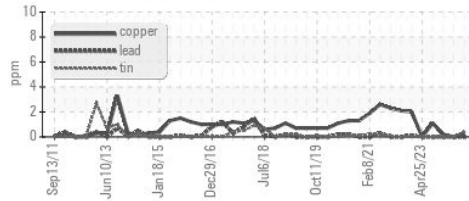


Viscosity @ 40°C

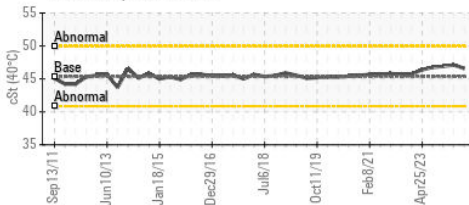

Particle Count

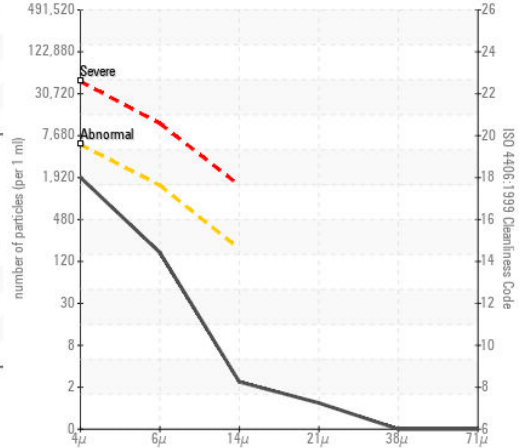

Acid Number

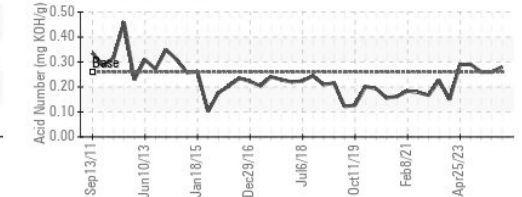

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0907963
 Lab Number : 06182756
 Unique Number : 11034082
 Test Package : IND 2

PROGRESSIVE PROCESSING INC
 1205 CHAVENELLE CT
 DUBUQUE, IA
 US 52002
 Contact: BLAINE PURDY
 bepurdy@hormel.com
 T: (563)557-4500
 F: (563)557-4508

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)