

OIL ANALYSIS REPORT

Sample Rating Trend



VISUAL METAL



Machine Id
FGE 868-11 - MUFFLER
Component
Hydraulic System
Fluid
AW HYDRAULIC OIL ISO 32 (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component if applicable. We advise that you inspect for the source(s) of metal. We recommend an early resample to monitor this condition. Please specify the brand, type, and viscosity of the oil on your next sample. We were unable to perform a particle count due to metal particles present in this sample.

Wear

Moderate concentration of visible metal present. All component wear rates are normal.

Contamination

No other contaminants were detected in the oil.

Fluid Condition

The AN level is acceptable for this fluid.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	BB0000519	---	---
Sample Date	Client Info	17 Apr 2024	---	---
Machine Age	hrs Client Info	0	---	---
Oil Age	hrs Client Info	0	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		ABNORMAL	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185m >20	2	---	---
Chromium ppm	ASTM D5185m >20	<1	---	---
Nickel ppm	ASTM D5185m >20	0	---	---
Titanium ppm	ASTM D5185m	<1	---	---
Silver ppm	ASTM D5185m	<1	---	---
Aluminum ppm	ASTM D5185m >20	0	---	---
Lead ppm	ASTM D5185m >20	0	---	---
Copper ppm	ASTM D5185m >20	1	---	---
Tin ppm	ASTM D5185m >20	<1	---	---
Vanadium ppm	ASTM D5185m	0	---	---
Cadmium ppm	ASTM D5185m	<1	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185m 5	0	---	---
Barium ppm	ASTM D5185m 5	0	---	---
Molybdenum ppm	ASTM D5185m 5	0	---	---
Manganese ppm	ASTM D5185m	<1	---	---
Magnesium ppm	ASTM D5185m 25	0	---	---
Calcium ppm	ASTM D5185m 200	28	---	---
Phosphorus ppm	ASTM D5185m 300	136	---	---
Zinc ppm	ASTM D5185m 370	100	---	---
Sulfur ppm	ASTM D5185m 2500	512	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185m >15	<1	---	---
Sodium ppm	ASTM D5185m	2	---	---
Potassium ppm	ASTM D5185m >20	0	---	---
Water %	ASTM D6304 >0.05	NEG	---	---



FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g	ASTM D8045 0.57	0.18	---	---

VISUAL

method	limit/base	current	history1	history2
White Metal scalar	*Visual NONE	▲ MODER	---	---
Yellow Metal scalar	*Visual NONE	NONE	---	---
Precipitate scalar	*Visual NONE	NONE	---	---
Silt scalar	*Visual NONE	NONE	---	---
Debris scalar	*Visual NONE	NONE	---	---
Sand/Dirt scalar	*Visual NONE	NONE	---	---
Appearance scalar	*Visual NORML	NORML	---	---
Odor scalar	*Visual NORML	NORML	---	---
Emulsified Water scalar	*Visual >0.05	NEG	---	---
Free Water scalar	*Visual	NEG	---	---





OIL ANALYSIS REPORT

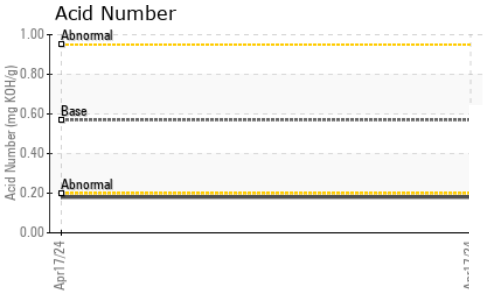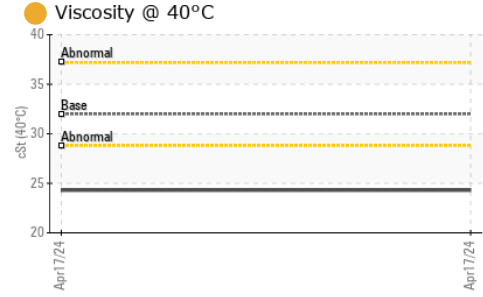

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	32	24.3	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

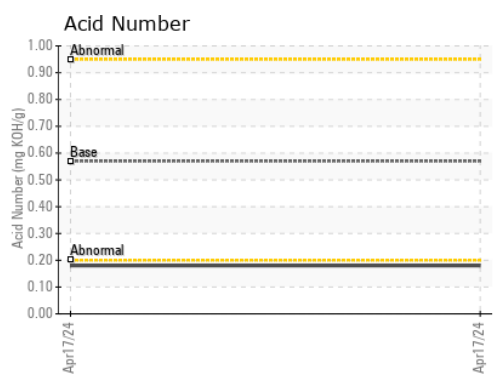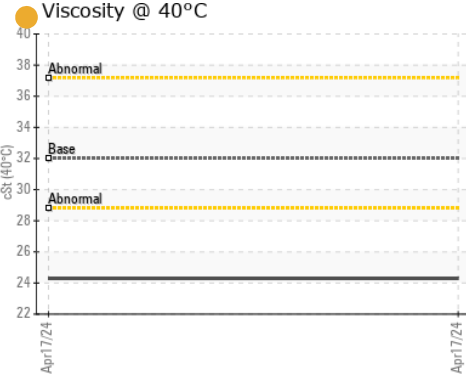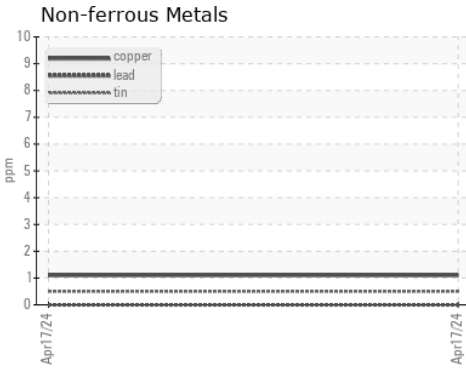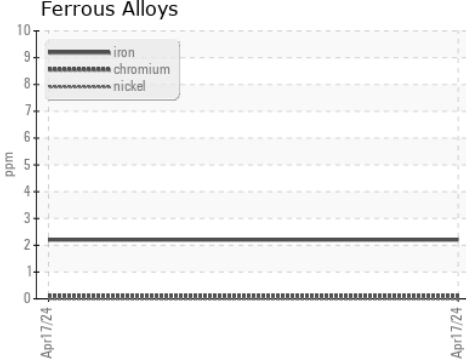

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : BB0000519 **Received** : 17 May 2024
Lab Number : 06182767 **Tested** : 28 May 2024
Unique Number : 11034093 **Diagnosed** : 28 May 2024 - Doug Bogart
Test Package : PLANT

TK ELEVATOR
 788 CIRCLE 75 PKWY SE
 ATLANTA, GA
 US 30339
 Contact: RICKY HENDERSON
 ricky.henderson@tkelevator.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)