




OIL ANALYSIS REPORT

Sample Rating Trend

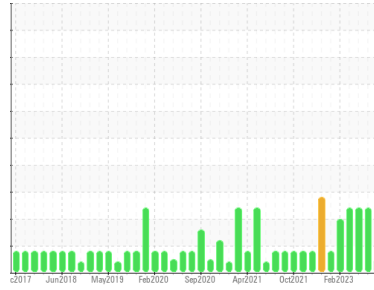

NORMAL



Area

COOK ROOM 1

Machine Id

B53368 SOUTH THERMABLEND 2 COOKER (S/N 8009384260 00 001)

Component

Gearbox

Fluid

PETRO CANADA PURITY FG EP GEAR OIL 220 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.
NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0907970	WC0880510	WC0872404
Sample Date	Client Info		16 May 2024	13 Feb 2024	25 Dec 2023
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	ATTENTION	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>200	44	12	55
Chromium	ppm	ASTM D5185m	>15	<1	0	<1
Nickel	ppm	ASTM D5185m	>15	0	<1	0
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>25	<1	<1	2
Lead	ppm	ASTM D5185m	>100	<1	0	0
Copper	ppm	ASTM D5185m	>200	0	0	0
Tin	ppm	ASTM D5185m	>25	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m		0	1	3
Calcium	ppm	ASTM D5185m		4	5	15
Phosphorus	ppm	ASTM D5185m		431	498	437
Zinc	ppm	ASTM D5185m		0	1	0
Sulfur	ppm	ASTM D5185m		1416	1214	1226

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>50	2	3	3
Sodium	ppm	ASTM D5185m		2	2	0
Potassium	ppm	ASTM D5185m	>20	0	<1	1

FLUID CLEANLINESS





	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>40000	33248	1522	1279
Particles >6µm	ASTM D7647	>5000	3924	829	697
Particles >14µm	ASTM D7647	>640	54	141	119
Particles >21µm	ASTM D7647	>160	8	48	40
Particles >38µm	ASTM D7647	>40	0	7	6
Particles >71µm	ASTM D7647	>10	0	1	1
Oil Cleanliness	ISO 4406 (c)	>22/19/16	22/19/13	18/17/14	17/17/14

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	0.51	0.58	0.64	0.61




OIL ANALYSIS REPORT

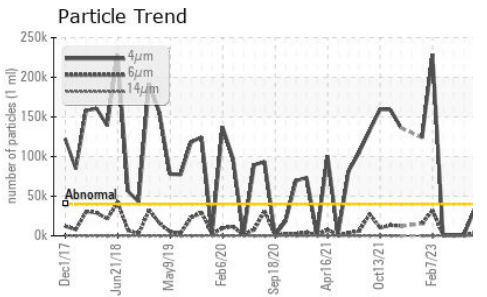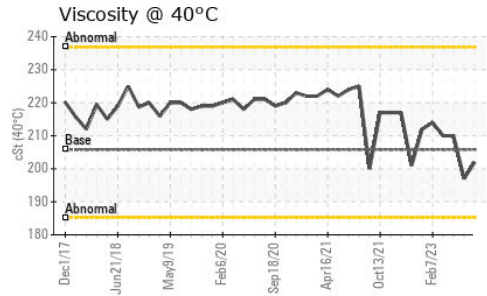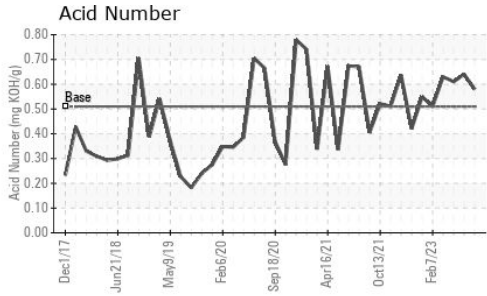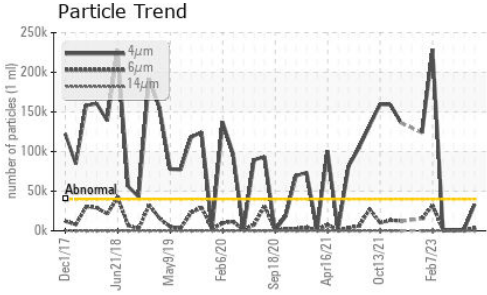






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	MILKY	HAZY
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	0.2%
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	205.8	202	197

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

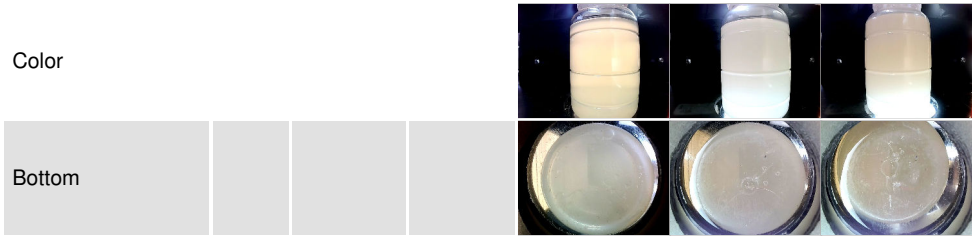

GRAPHS

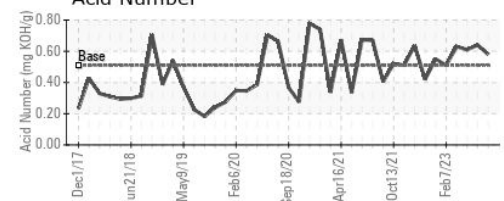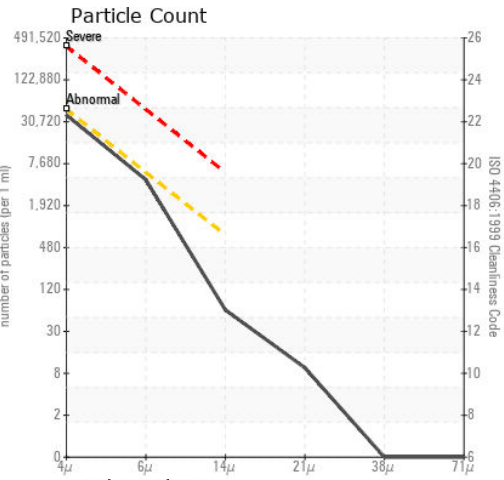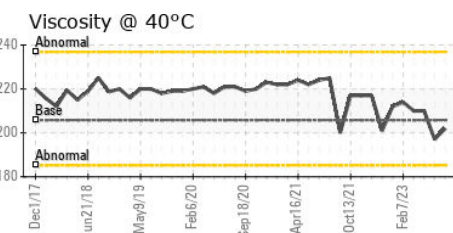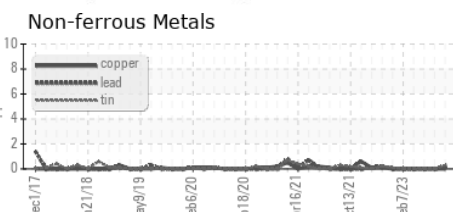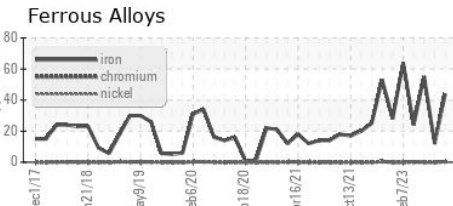

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0907970 **Received** : 17 May 2024
Lab Number : 06182789 **Tested** : 22 May 2024
Unique Number : 11034115 **Diagnosed** : 22 May 2024 - Wes Davis
Test Package : IND 2 (Additional Tests: PrtCount)

PROGRESSIVE PROCESSING INC
 1205 CHAVENELLE CT
 DUBUQUE, IA
 US 52002
 Contact: BLAINE PURDY
 bepurdy@hormel.com
 T: (563)557-4500
 F: (563)557-4508

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)