

# **OIL ANALYSIS REPORT**

ISO

## Machine Id QC230801HY

Component Hydraulic System

JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

### DIAGNOSIS

#### A Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.

#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	<b>ATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0939639	WC0939638	WC0939637
Sample Date		Client Info		17 May 2024	16 May 2024	15 May 2024
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184	>47	34	56	29
Iron	ppm	ASTM D5185m	>78	58	65	57
Chromium	ppm	ASTM D5185m	>2	1	<1	1
Nickel	ppm	ASTM D5185m	>3	1	0	2
Titanium	ppm	ASTM D5185m	>2	<1	0	<1
Silver	ppm	ASTM D5185m	>2	<1	<1	<1
Aluminum	ppm	ASTM D5185m	>5	2	3	2
Lead	ppm	ASTM D5185m	>11	10	6	9
Copper	ppm	ASTM D5185m	>84	66	73	79
Tin	ppm	ASTM D5185m	>4	3	0	3
Vanadium		ASTM D5185m	24	0	<1	<1
	ppm			-		
Cadmium	ppm	ASTM D5185m		<1	0	<1
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	6	88	92	109
Barium	ppm	ASTM D5185m	0	0	1	0
Volybdenum	ppm	ASTM D5185m	0	<1	0	<1
Manganese	ppm	ASTM D5185m		17	17	16
Magnesium	ppm	ASTM D5185m	145	21	20	21
Calcium	ppm	ASTM D5185m	3570	3462	3123	3486
Phosphorus	ppm	ASTM D5185m	1290	1153	1030	1228
Zinc	ppm	ASTM D5185m	1640	1324	1259	1444
Sulfur	ppm	ASTM D5185m		3801	3438	3829
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>11	8	8	9
Sodium	ppm	ASTM D5185m		16	19	17
Potassium		ASTM D5185m	>20	0	0	3
Water	ppm %			0.059		
opm Water		ASTM D6304 ASTM D6304	>0.1669 >1669		0.069 697	0.289 2890
•	ppm			597		2090
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<u> </u>	<b>A</b> 236462	<b>1</b> 46770
Particles >6µm		ASTM D7647	>1300	<u> </u>	106899	▲ 68536
Particles >14µm		ASTM D7647	>160	<u> </u>	<b>A</b> 318	<u> </u>
Particles >21µm		ASTM D7647	>40	🔺 367	5	12
Particles >38µm		ASTM D7647	>10	3	0	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>A</b> 26/25/19	▲ 25/24/15	▲ 24/23/15
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.8	0.95	0.93	0.97
:52:32) Rev: 1	- 0					Submitted By:


Report Id: WEACARQA [WUSCAR] 06182806 (Generated: 05/30/2024 17:52:32) Rev: 1


```
Page 1 of 2
```





# **OIL ANALYSIS REPORT**












VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	MODER	MODER	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	MODER	MODER	MODER
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1669	NEG	0.2%	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	57.0	62.2	62.1	63.0
Visc @ 100°C	cSt	ASTM D445	9.4	9.3	9.0	9.2
Viscosity Index (VI)	Scale	ASTM D2270	147	128	121	124
SAMPLE IMAGES		method	limit/base	current	history1	history2



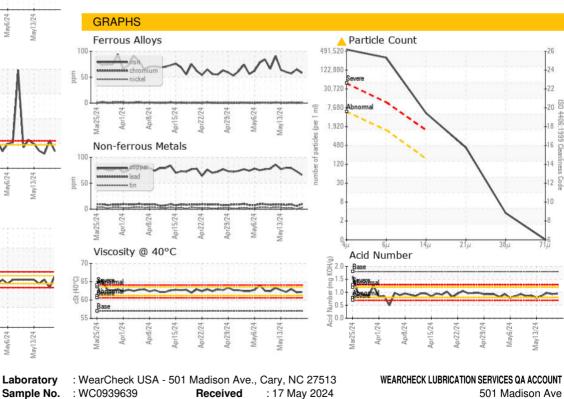

: 30 May 2024

: 30 May 2024 - Jonathan Hester

501 Madison Ave Cary, NC US 27513 Contact: WCLS CARY NC

Test Package : IND 2 (Additional Tests: KF, KV100, PQ, VI) To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Lab Number : 06182806

Unique Number : 11034132

Color

Bottom

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Tested

Diagnosed

Report Id: WEACARQA [WUSCAR] 06182806 (Generated: 05/30/2024 17:52:32) Rev: 1

Certificate 12367

T: (919)379-4102

F: (919)379-4050