


## **OIL ANALYSIS REPORT**

Sample Rating Trend



NORMAL



# **ROTH ROCK** [200005321] 04WEA81551

**Wind Turbine Gearbox** 

Eluid

**CASTROL OPTIGEAR SYNTHETIC A ISO 320 (--- LTR)** 

## DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.


### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

20 ( 2111)						
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		NX013862	NX012202	NX012203
Sample Date		Client Info		08 May 2024	05 Dec 2023	21 Mar 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184	>80	16	18	17
Iron	ppm	ASTM D5185m	>150	32	18	66
Chromium	ppm	ASTM D5185m	>5	<1	0	<1
Nickel	ppm	ASTM D5185m	>10	0	0	<1
Titanium	ppm	ASTM D5185m	>10	<1	0	<1
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>10	4	<b>▲</b> 13	<1
Lead	ppm	ASTM D5185m	>20	<1	0	0
Copper	ppm	ASTM D5185m	>50	<1	2	<1
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	23	0
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	1150	955	1042	492
Manganese	ppm	ASTM D5185m		1	1	2
Magnesium	ppm	ASTM D5185m	1800	1963	1831	1550
Calcium	ppm	ASTM D5185m	20	51	50	13
Phosphorus	ppm	ASTM D5185m	1450	1413	1437	1129
Zinc	ppm	ASTM D5185m	1650	1563	1691	1261
Sulfur	ppm	ASTM D5185m	4900	7168	6214	5528
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	13	18	9
Sodium	ppm	ASTM D5185m	>20	5	6	24
Potassium	ppm	ASTM D5185m	>20	0	0	2
Water	%	ASTM D6304		0.020	0.029	0.045
ppm Water	ppm	ASTM D6304	>1000	210	299	457.2
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		4601	24270	1253
Particles >6µm		ASTM D7647	>2500	781	1796	137
Particles >14µm		ASTM D7647	>320	31	28	9
Particles >21µm		ASTM D7647	>80	4	8	3
Particles >38µm		ASTM D7647	>20	0	0	0
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/18/15	19/17/12	22/18/12	17/14/10
FLUID DEGRADA	TION	method	limit/base	current	history1	history2



## OIL ANALYSIS REPORT

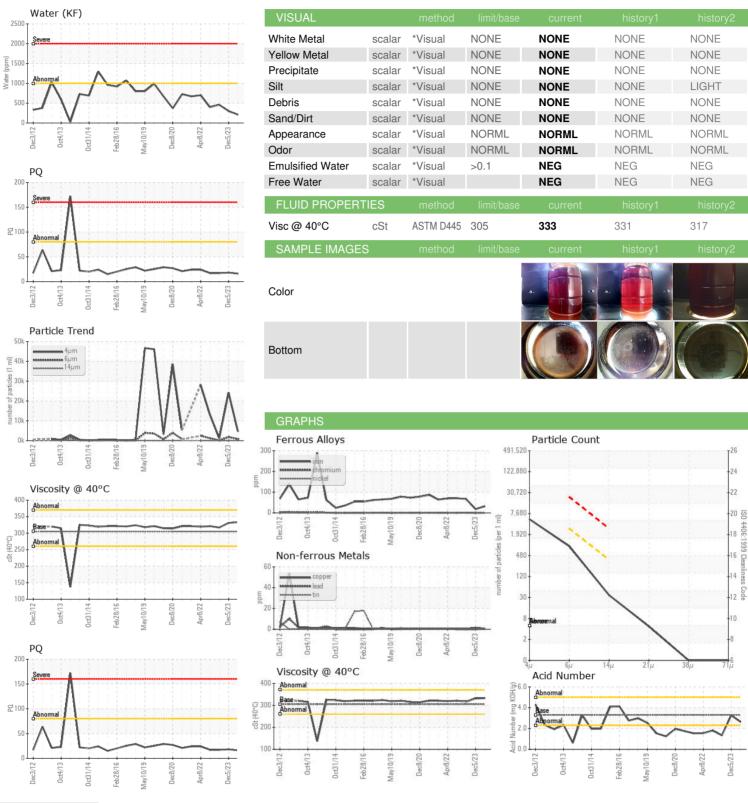





Certificate 12367

Report Id: NORROT [WUSCAR] 06182837 (Generated: 05/22/2024 16:09:32) Rev: 1

Laboratory Sample No.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : NX013862 Lab Number : 06182837

Unique Number : 11034163

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Received **Tested** 

Diagnosed : 22 May 2024 - Don Baldridge Test Package : IND 2 ( Additional Tests: KF, PQ, PrtCount )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

: 17 May 2024

: 22 May 2024

Contact: ADAY MAGEC

300 SOUTH WACKER DRIVE, SUITE 1500

F: (312)386-7102

aday.magec@gestampren.com T:

**NORDEX USA - ROTH ROCK** 

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: ADAY MAGEC - NORROT

CHICAGO, IL

US 60606