

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

Area ATLAS COPCO API-673187 Compressor

Fluid ATLAS COPCO ROTO XTEND (16 GAL)

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

					-	
Jun2017	Jun2018	Sep2019	Jun2020	Sep2021	Oct2022	Sep2023


2015 1-2016


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0011769	USP0006281	USP0004381
Sample Date		Client Info		06 May 2024	07 Mar 2024	06 Dec 2023
Machine Age	hrs	Client Info		16710	16191	15495
Oil Age	hrs	Client Info		1365	846	150
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>5	0	0	0
Nickel	ppm	ASTM D5185m		<1	0	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>15	<1	0	0
Lead	ppm	ASTM D5185m	>65	<1	0	0
Copper	ppm	ASTM D5185m	>65	<1	0	0
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m		1	<1	0
Calcium	ppm	ASTM D5185m		2	<1	0
Phosphorus	ppm	ASTM D5185m		376	385	455
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		1067	1083	566
CONTAMINANTS	5	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>35	6	6	6
Sodium	ppm	ASTM D5185m		<1	<1	0
Potassium	ppm	ASTM D5185m	>20	<1	<1	<1
Water	%	ASTM D6304	>0.1	0.008	0.005	0.005
ppm Water	ppm	ASTM D6304	>1000	88	54	58
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	831		121
Particles >6µm		ASTM D7647		246		45
Particles >14µm		ASTM D7647	>320	26		7
Particles >21µm		ASTM D7647		4		2
Particles >38µm		ASTM D7647	>20	0		0
Particles >71µm		ASTM D7647		0		0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	17/15/12		14/13/10
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.14	0.51	0.48	0.48


Contact/Location: KURT CONRADT - TYSWAV Page 1 of 2





OIL ANALYSIS REPORT

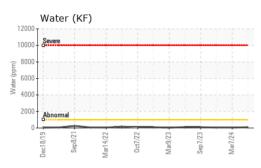



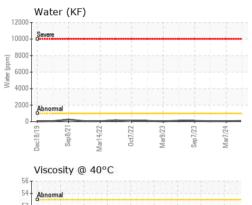







VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	🔺 MODER	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPER	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	46	43.6	42.2	42.0
SAMPLE IMAGE	method	limit/base	current	history1	history2	
Color						
						11-22

Bottom

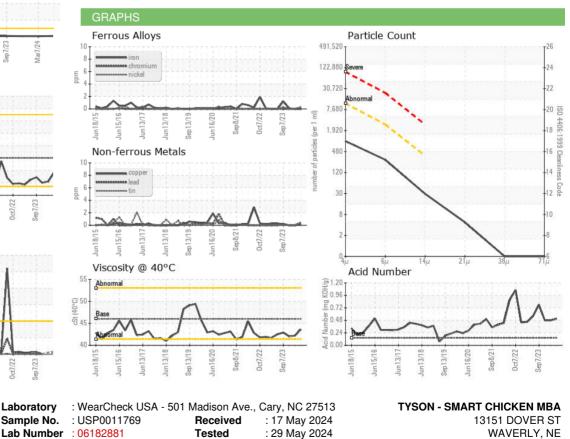

: 29 May 2024 - Jonathan Hester





To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Diagnosed

Report Id: TYSWAV [WUSCAR] 06182881 (Generated: 05/29/2024 17:08:58) Rev: 1

Contact/Location: KURT CONRADT - TYSWAV

E:

T: (402)786-1072

US 68462

Contact: KURT CONRADT

kconradt@smartchicken.com