

OIL ANALYSIS REPORT

Area [MX_A SOUTH] NOT GIVEN USP0011771 (S/N NO INFO ON SIF/BOTTLE) Component

Gearbox

Fluid GEAR OIL ISO 220 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

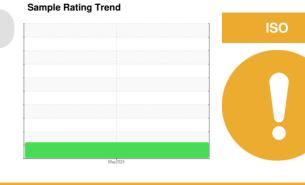

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0011771		
Sample Date		Client Info		10 May 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	1		
Chromium	ppm	ASTM D5185m	>15	0		
Nickel	ppm	ASTM D5185m	>15	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		<1		
Aluminum	ppm	ASTM D5185m	>25	0		
Lead	ppm	ASTM D5185m	>100	0		
Copper	ppm	ASTM D5185m	>200	<1		
Tin	ppm	ASTM D5185m	>25	0		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	50	0		
Barium	ppm	ASTM D5185m	15	0		
Molybdenum	ppm	ASTM D5185m	15	0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	50	0		
Calcium	ppm	ASTM D5185m	50	0		
Phosphorus	ppm	ASTM D5185m	350	615		
Zinc	ppm	ASTM D5185m	100	0		
Sulfur	ppm	ASTM D5185m	12500	458		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	7		
Sodium	ppm	ASTM D5185m		1		
Potassium	ppm	ASTM D5185m	>20	0		
Water	%	ASTM D6304	>0.2	0.002		
ppm Water	ppm	ASTM D6304	>2000	25		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	934769		
Particles >6µm		ASTM D7647	>5000	<u> </u>		
Particles >14µm		ASTM D7647	>640	374		
Particles >21µm		ASTM D7647	>160	57		
Particles >38µm		ASTM D7647	>40	1		
Particles >71µm		ASTM D7647	>10	0		
Oil Cleanliness		ISO 4406 (c)	>21/19/16	<mark>)</mark> 22/20/16		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	ma KOH/a	ASTM D8045	0.85	0.63		


Acid Number (AN)

mg KOH/g ASTM D8045 0.85

0.63



OIL ANALYSIS REPORT

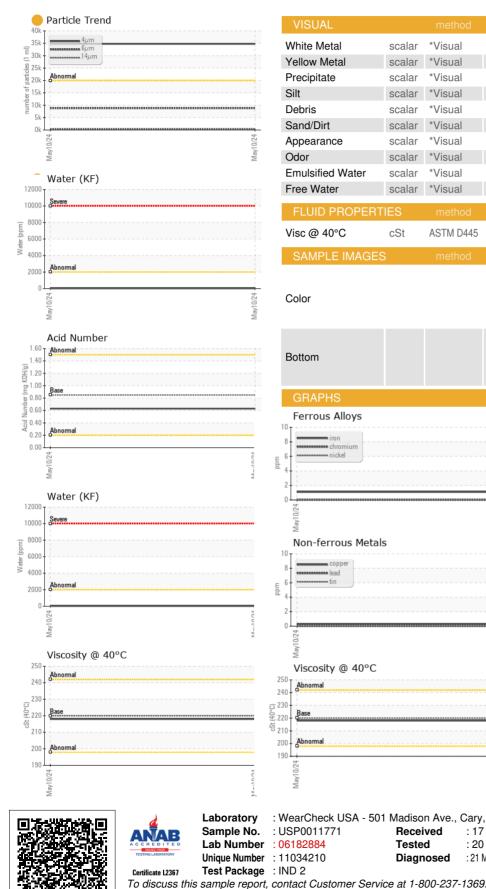

NONE *Visual NONE scalar *Visual NONE NONE scalar NONE scalar *Visual NONE scalar *Visual NONE NONE *Visual NONE LIGHT scalar NONE NONE scalar *Visual NORML scalar *Visual NORML *Visual NORML NORML scalar *Visual scalar >0.2 NEG scalar *Visual NEG FLUID PROPERTIES cSt ASTM D445 220 218 no image no image no image no image Particle Count 491.5 122,88 30.72 7.680 (per 1 ml) May10/24 4406 1,920 :1999 Cle Ses 480 120 14 31 214 28/ Acid Number (B/HOX B/HOX 1.00 Ba ā 0.50 Ab Acid 0.00 May10/24 Vav : WearCheck USA - 501 Madison Ave., Cary, NC 27513 **TYSON - SMART CHICKEN MBA** Received : 17 May 2024 13151 DOVER ST Tested : 20 May 2024 WAVERLY, NE



Contact: KURT CONRADT kconradt@smartchicken.com * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

: 21 May 2024 - Jonathan Hester

Report Id: TYSWAV [WUSCAR] 06182884 (Generated: 05/21/2024 16:46:27) Rev: 1

Contact/Location: KURT CONRADT - TYSWAV

E:

US 68462

T: (402)786-1072