

OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



RECYCLED NH3 OIL

Refrigeration Compressor

USPI 1009-68 SC (--- GAL)

DIAGNOSIS

Recommendation

This is a baseline read-out on the submitted sample.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		t2019 Jan20.	20 Mar2020 Aug2020	Nov2020 May2021 Feb2022 1	lov2022	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0011789	USP242700	USP233651
Sample Date		Client Info		11 May 2024	10 Oct 2023	06 Mar 2023
Machine Age	days	Client Info		0	0	0
Oil Age	days	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	MARGINAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	0	▲ 20	2
Chromium	ppm	ASTM D5185m	>2	0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	<1	0	<1
Aluminum	ppm	ASTM D5185m	>3	0	0	0
Lead	ppm	ASTM D5185m	>2	0	0	0
Copper	ppm	ASTM D5185m	>8	0	0	0
Tin	ppm	ASTM D5185m	>4	0	0	0
Vanadium	ppm	ASTM D5185m		<1	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m		0	0	<1
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		0	0	0
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m	50	0	20	0
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	<1	2
Sodium	ppm	ASTM D5185m		1	0	0
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water	%	ASTM D6304	>0.01	0.002	0.002	0.003
ppm Water	ppm	ASTM D6304	>100	20	16.6	28.7
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	5169	1163	9376
Particles >6µm		ASTM D7647	>2500	1166	239	1203
Particles >14µm		ASTM D7647	>320	33	12	18
Particles >21µm		ASTM D7647	>80	5	2	2
Particles >38µm		ASTM D7647	>20	0	0	0
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	20/17/12	17/15/11	20/17/11
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
A sial Niversland (ANI)	I/OLI/-	ACTM DOZA	0.005	0.012	0.010	0.015

Acid Number (AN)

0.013


0.013


mg KOH/g ASTM D974 0.005


0.015





OIL ANALYSIS REPORT












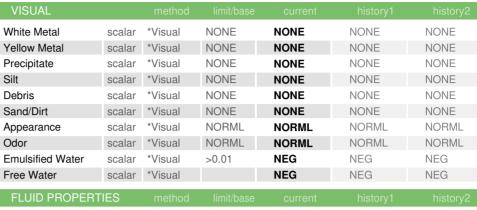


|--|

Color

SAMPLE IMAGES





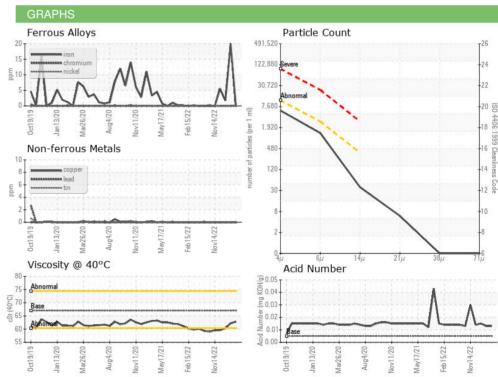





Certificate 12367

Laboratory Sample No. Lab Number

: USP0011789 : 06182903 Unique Number : 11034229 Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 17 May 2024

Tested : 20 May 2024 Diagnosed : 21 May 2024 - Jonathan Hester **TYSON -STORM LAKE-USP**

STORM LAKE, IA US

Contact: STEVE SWANSON

To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

T: (712)732-7433 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (712)749-5277