

## **OIL ANALYSIS REPORT**

### Area Marcus Hook/Cryogenic/Compressor CRYOGENIC COMPRESSOR 40-C-101D

Rotary Compressor

Fluid FRICK COMPRESSOR OIL #12B (550 GAL)

#### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear


All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

#### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





SAMPLE INFORM	<b>IATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		TO60001789	TO60001829	TO90003041
Sample Date		Client Info		09 May 2024	05 Nov 2023	25 Apr 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>70	0	0	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>3	0	0	0
Lead	ppm	ASTM D5185m	>4	<1	0	0
Copper	ppm	ASTM D5185m	>20	0	0	0
Tin	ppm	ASTM D5185m	>3	<1	<1	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		0	0	<1
Calcium	ppm	ASTM D5185m		0	2	0
Phosphorus	ppm	ASTM D5185m		0	10	10
Zinc	ppm	ASTM D5185m		0	0	<1
Sulfur	ppm	ASTM D5185m		0	5	0
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>45	6	6	7
Sodium	ppm	ASTM D5185m		2	<1	2
Potassium	ppm	ASTM D5185m	>20	0	0	<1
Water	%	ASTM D6304	>0.6	0.049	0.120	0.063
ppm Water	ppm	ASTM D6304		498	1207.8	634.0
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>2500	1226	▲ 8492	12213
Particles >6µm		ASTM D7647		256	<b>A</b> 2265	<u> </u>
Particles >14µm		ASTM D7647	>80	10	<u>▲</u> 107	62
Particles >21µm		ASTM D7647		2	19	10
Particles >38µm		ASTM D7647	>4	0	0	0
Particles >71µm		ASTM D7647		0	0	0
Oil Cleanliness		ISO 4406 (c)	>18/15/13	17/15/10	<b>2</b> 0/18/14	<b>1</b> 21/19/13
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.076	0.043	0.09





# **OIL ANALYSIS REPORT**












VISUAL		ام م ما 4 م میں			lata ta mut	history O
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.6	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		72.7	75.5	75.1
Visc @ 100°C	cSt	ASTM D445		11.8	12.6	12.4
Viscosity Index (VI)	Scale	ASTM D2270		157	166	163
SAMPLE IMAGES	6	method	limit/base	current	history1	history2
Color					40 - 2-(0	

Bottom

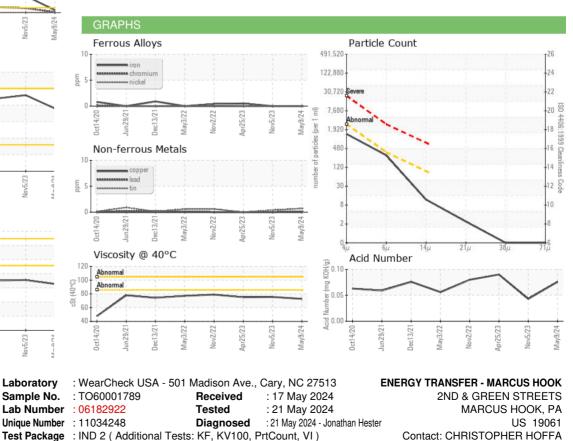

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: ETCMHOOK [WUSCAR] 06182922 (Generated: 05/21/2024 15:59:43) Rev: 1

Certificate 12367

Laboratory

Sample No.

Submitted By: ERIC THORNTON Page 2 of 2

T:

F:

christopher.hoffa@energytransfer.com