


OIL ANALYSIS REPORT

Marcus Hook/Cryogenic/Compressor **CRYOGENIC COMPRESSOR 30-C-101C**

Rotary Compressor

FRICK 18 (220 GAL)

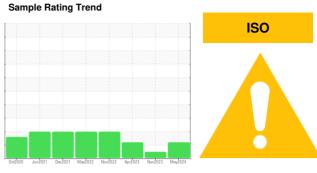

DIAGNOSIS

Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. (Customer Sample Comment: Frick #18)

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		0ct2020 J	lun2021 Dec2021 May20	22 Nov2022 Apr2023 Nov2023	I May2024	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		TO90002160	TO60001814	TO90003060
Sample Date		Client Info		09 May 2024	05 Nov 2023	25 Apr 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	NORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>70	1	1	3
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>3	0	0	0
Lead	ppm	ASTM D5185m	>4	0	0	0
Copper	ppm	ASTM D5185m	>20	0	0	0
Tin	ppm	ASTM D5185m	>3	0	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		0	0	0
Calcium	ppm	ASTM D5185m		0	<1	0
Phosphorus	ppm	ASTM D5185m		0	<1	1
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		0	6	0
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>45	<1	<1	2
Sodium	ppm	ASTM D5185m		2	<1	0
Potassium	ppm	ASTM D5185m	>20	0	0	<1
Water	%	ASTM D6304	>0.6	0.00	0.003	0.001
ppm Water	ppm	ASTM D6304		0	30.1	9.5
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>2500	5353	2288	△ 6109
Particles >6µm		ASTM D7647	>320	1336	317	<u>▲</u> 1625
Particles >14μm		ASTM D7647	>80	49	7	27
Particles >21µm		ASTM D7647	>20	8	2	5
Particles >38µm		ASTM D7647	>4	0	0	1
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>18/15/13	<u>^</u> 20/18/13	18/15/10	△ 20/18/12
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.013	0.015	0.015



OIL ANALYSIS REPORT

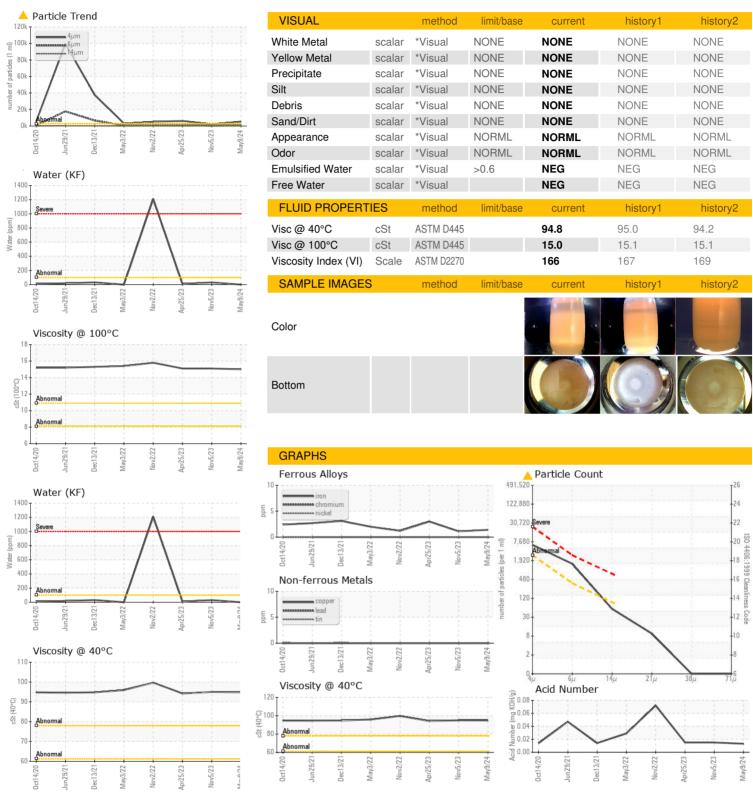





Certificate 12367

Laboratory

Sample No. Lab Number

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : TO90002160 : 06182941 Unique Number : 11034267

Received : 17 May 2024 **Tested** Diagnosed

: 20 May 2024

: 21 May 2024 - Don Baldridge Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, VI)

US 19061 Contact: CHRISTOPHER HOFFA christopher.hoffa@energytransfer.com T:

ENERGY TRANSFER - MARCUS HOOK

2ND & GREEN STREETS

MARCUS HOOK, PA

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

F: