




OIL ANALYSIS REPORT



Machine Id
Coopersville CAT 7 CPVM07BE
 Component
Biogas Engine
 Fluid
CHEVRON HDAX 9500 GAS ENGINE OIL 40 (125 GAL)

Sample Rating Trend

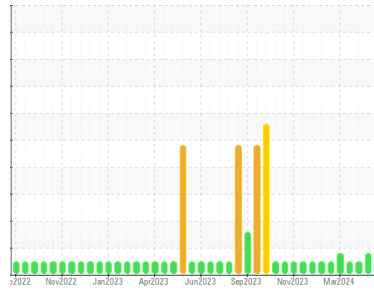

DIAGNOSIS

- Recommendation**
No corrective action is recommended at this time. Resample at the next service interval to monitor.
- Wear**
The tin level is abnormal. All other component wear rates are normal.

Contamination
There is no indication of any contamination in the oil.

Fluid Condition
The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | WC0871577 | WC0871570 | WC0871567 |
| Sample Date | Client Info | | 14 May 2024 | 02 May 2024 | 24 Apr 2024 |
| Machine Age | hrs | Client Info | 108841 | 108556 | 108368 |
| Oil Age | hrs | Client Info | 497 | 212 | 24 |
| Oil Changed | Client Info | | Not Chngd | Not Chngd | Changed |
| Sample Status | | | ABNORMAL | ABNORMAL | NORMAL |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel | WC Method | >4.0 | <1.0 | <1.0 | <1.0 |
| Water | WC Method | | NEG | NEG | NEG |
| Glycol | WC Method | | NEG | NEG | NEG |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|-----------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m >14 | <1 | 0 | 1 |
| Chromium | ppm | ASTM D5185m >3 | 0 | <1 | 0 |
| Nickel | ppm | ASTM D5185m | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m >5 | 2 | 2 | 1 |
| Lead | ppm | ASTM D5185m >8 | <1 | <1 | 1 |
| Copper | ppm | ASTM D5185m >5 | 2 | <1 | <1 |
| Tin | ppm | ASTM D5185m >3 | ▲ 4 | ▲ 4 | 2 |
| Vanadium | ppm | ASTM D5185m | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|-------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m | 75 | 3 | 3 |
| Barium | ppm | ASTM D5185m | 0 | <1 | 0 |
| Molybdenum | ppm | ASTM D5185m | 4 | 1 | 1 |
| Manganese | ppm | ASTM D5185m | <1 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m | 0 | 5 | 5 |
| Calcium | ppm | ASTM D5185m | 1648 | 1791 | 1702 |
| Phosphorus | ppm | ASTM D5185m | 343 | 270 | 254 |
| Zinc | ppm | ASTM D5185m | 412 | 320 | 306 |
| Sulfur | ppm | ASTM D5185m | 2960 | 2392 | 2038 |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|------------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185m >180 | 100 | 98 | 46 |
| Sodium | ppm | ASTM D5185m >20 | <1 | 0 | <1 |
| Potassium | ppm | ASTM D5185m >20 | 0 | <1 | <1 |

INFRA-RED

| | method | limit/base | current | history1 | history2 |
|-----------|----------|-------------|-------------|----------|----------|
| Soot % | % | *ASTM D7844 | 0 | 0 | 0 |
| Nitration | Abs/cm | *ASTM D7624 | 5.7 | 6.0 | 5.2 |
| Sulfation | Abs/.1mm | *ASTM D7415 | 19.1 | 17.5 | 15.3 |


FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|----------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | *ASTM D7414 | 13.0 | 10.4 | 8.3 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 1.0 | 0.82 | 0.70 | 0.591 |
| Base Number (BN) | mg KOH/g | ASTM D2896 5.4 | 4.48 | 4.45 | 4.67 |




OIL ANALYSIS REPORT


Non-ferrous Metals

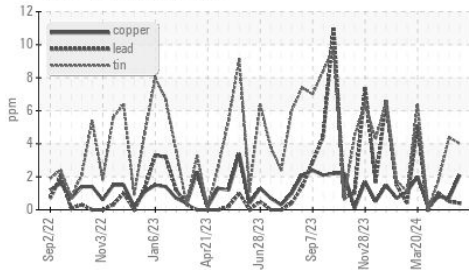


FT-IR (Direct Trend)

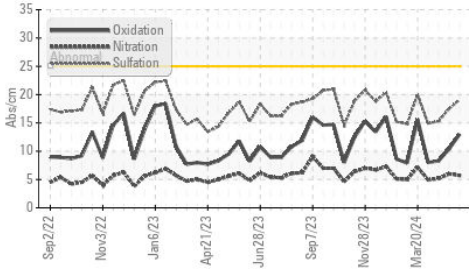


Acid Number

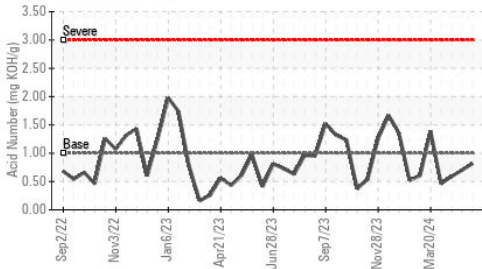

Base Number

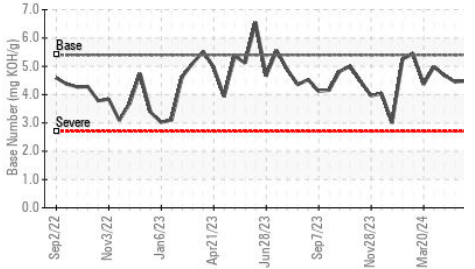


Viscosity @ 100°C

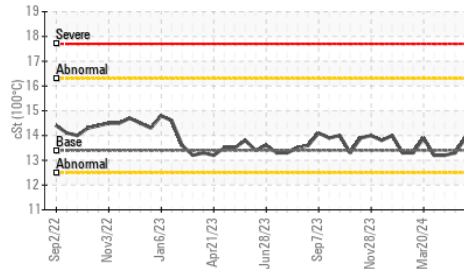

| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | NEG | NEG | NEG |
| Free Water | scalar | *Visual | NEG | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C | cSt | ASTM D445 | 13.4 | 13.9 | 13.3 |

GRAPHS

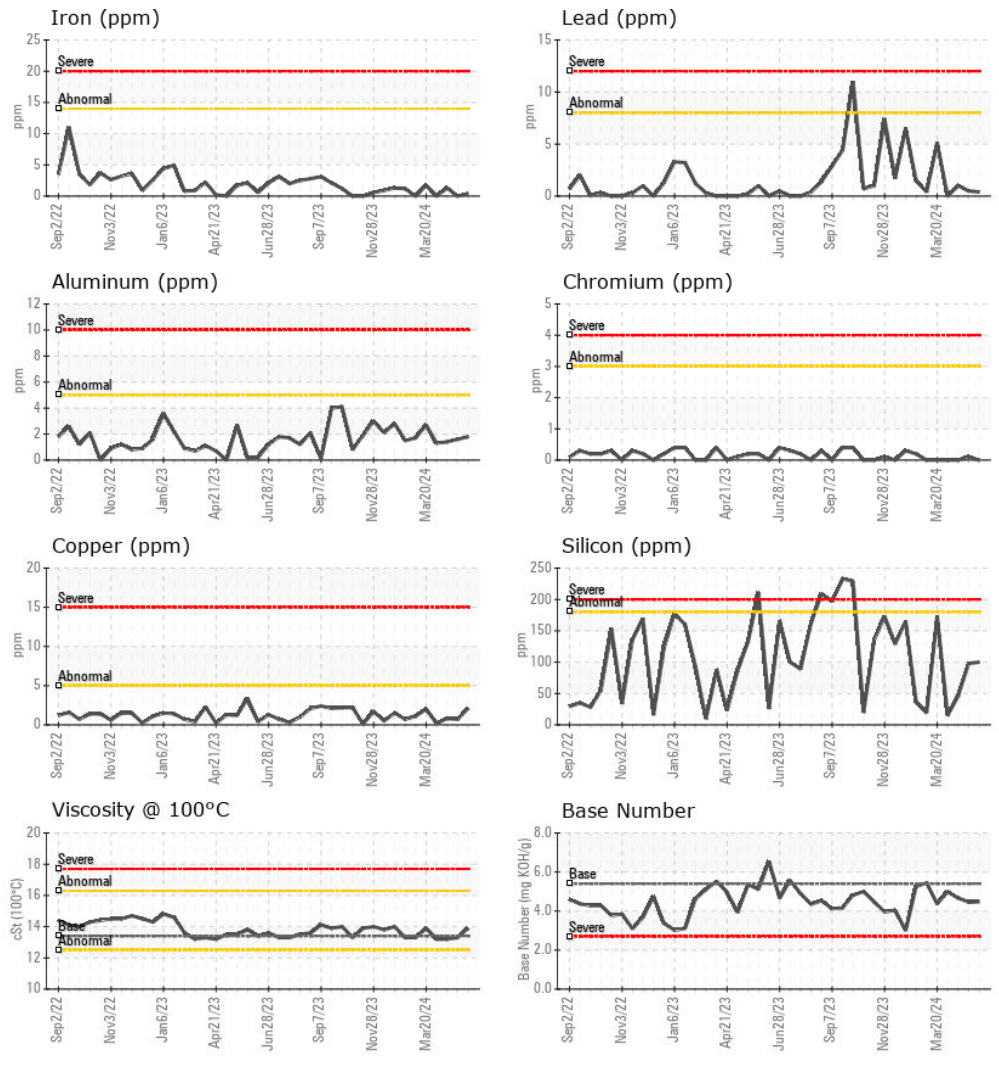

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0871577
Lab Number : 06183051
Unique Number : 11034377
Test Package : MOB 2

Received : 17 May 2024
Tested : 20 May 2024
Diagnosed : 20 May 2024 - Sean Felton

EDL NA Recips-Coopersville
 Coopersville Powerstation, 15362 68th Avenue
 Coopersville, MI
 US 49404

Contact: Daniel Young
 daniel.young@edlenergy.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: