




OIL ANALYSIS REPORT

Sample Rating Trend

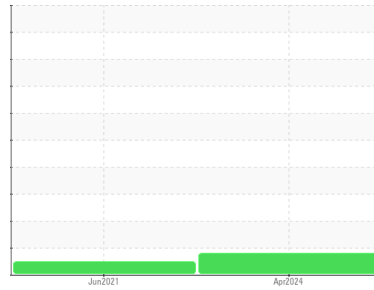

ISO



Area
[23024]

Machine Id
80-233

Component
Hydraulic System

Fluid
ConocoPhillips powertran oil (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. (Customer Sample Comment: ConocoPhillips powertran oil)

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|----------|
| Sample Number | Client Info | | | WC0923383 | WC0548785 | --- |
| Sample Date | Client Info | | | 17 Apr 2024 | 04 Jun 2021 | --- |
| Machine Age | hrs | Client Info | | 3221 | 1991 | --- |
| Oil Age | hrs | Client Info | | 225 | 0 | --- |
| Oil Changed | Client Info | | | Not Chngd | N/A | --- |
| Sample Status | | | | ATTENTION | NORMAL | --- |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---------------|-----------|--------|------------|------------|----------|----------|
| Water | WC Method | | >0.1 | NEG | NEG | --- |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m | >20 | 4 | 3 | --- |
| Chromium | ppm | ASTM D5185m | >10 | <1 | <1 | --- |
| Nickel | ppm | ASTM D5185m | >10 | <1 | 0 | --- |
| Titanium | ppm | ASTM D5185m | | <1 | <1 | --- |
| Silver | ppm | ASTM D5185m | | <1 | 0 | --- |
| Aluminum | ppm | ASTM D5185m | >10 | 2 | 0 | --- |
| Lead | ppm | ASTM D5185m | >10 | <1 | <1 | --- |
| Copper | ppm | ASTM D5185m | >75 | 3 | 3 | --- |
| Tin | ppm | ASTM D5185m | >10 | <1 | <1 | --- |
| Antimony | ppm | ASTM D5185m | | --- | 0 | --- |
| Vanadium | ppm | ASTM D5185m | | <1 | 0 | --- |
| Cadmium | ppm | ASTM D5185m | | 1 | <1 | --- |





| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m | | 103 | 124 | --- |
| Barium | ppm | ASTM D5185m | | 0 | 0 | --- |
| Molybdenum | ppm | ASTM D5185m | | 2 | <1 | --- |
| Manganese | ppm | ASTM D5185m | | <1 | <1 | --- |
| Magnesium | ppm | ASTM D5185m | | 29 | 10 | --- |
| Calcium | ppm | ASTM D5185m | | 2864 | 2444 | --- |
| Phosphorus | ppm | ASTM D5185m | | 993 | 825 | --- |
| Zinc | ppm | ASTM D5185m | | 1211 | 1051 | --- |
| Sulfur | ppm | ASTM D5185m | | 3778 | 4663 | --- |

| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|-------------|------------|-----------|----------|----------|
| Silicon | ppm | ASTM D5185m | >20 | 16 | 11 | --- |
| Sodium | ppm | ASTM D5185m | | 2 | 4 | --- |
| Potassium | ppm | ASTM D5185m | >20 | 2 | 1 | --- |

| FLUID CLEANLINESS | | method | limit/base | current | history1 | history2 |
|-------------------|--|--------------|------------|-----------------|----------|----------|
| Particles >4µm | | ASTM D7647 | >5000 | 6726 | 2120 | --- |
| Particles >6µm | | ASTM D7647 | >1300 | 227 | 83 | --- |
| Particles >14µm | | ASTM D7647 | >160 | 11 | 10 | --- |
| Particles >21µm | | ASTM D7647 | >40 | 5 | 4 | --- |
| Particles >38µm | | ASTM D7647 | >10 | 2 | 0 | --- |
| Particles >71µm | | ASTM D7647 | >3 | 0 | 0 | --- |
| Oil Cleanliness | | ISO 4406 (c) | >19/17/14 | 20/15/11 | 18/14/10 | --- |



OIL ANALYSIS REPORT

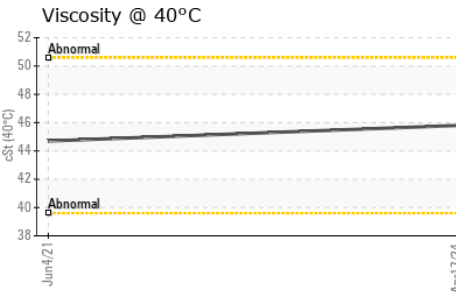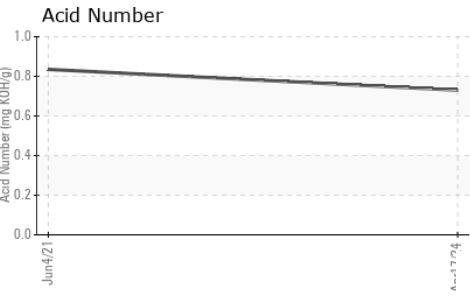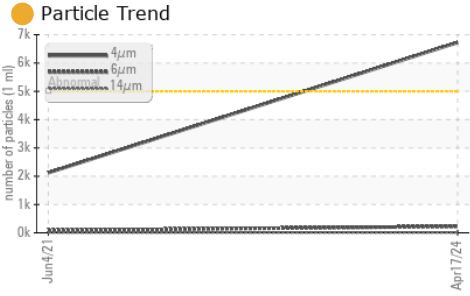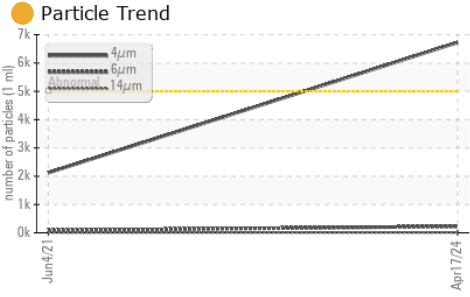


| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-------------------|----------|------------|------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 | | 0.73 | 0.835 | --- |





| VISUAL | | method | limit/base | current | history1 | history2 |
|------------------|--------|---------|------------|--------------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | --- |
| Precipitate | scalar | *Visual | NONE | NONE | NONE | --- |
| Silt | scalar | *Visual | NONE | NONE | NONE | --- |
| Debris | scalar | *Visual | NONE | NONE | NONE | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | --- |
| Appearance | scalar | *Visual | NORML | NORML | NORML | --- |
| Odor | scalar | *Visual | NORML | NORML | NORML | --- |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | NEG | --- |
| Free Water | scalar | *Visual | | NEG | NEG | --- |

| FLUID PROPERTIES | | method | limit/base | current | history1 | history2 |
|------------------|-----|-----------|------------|-------------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 | | 45.8 | 44.7 | --- |

SAMPLE IMAGES

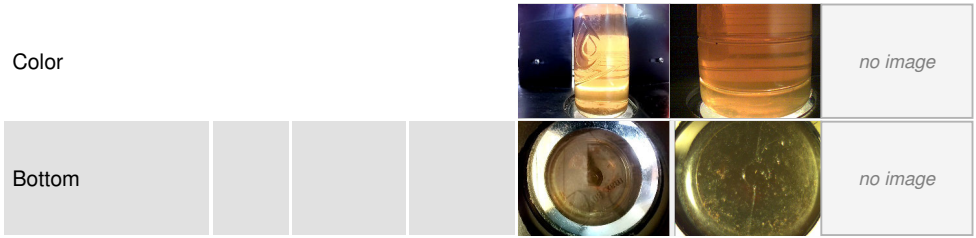

GRAPHS

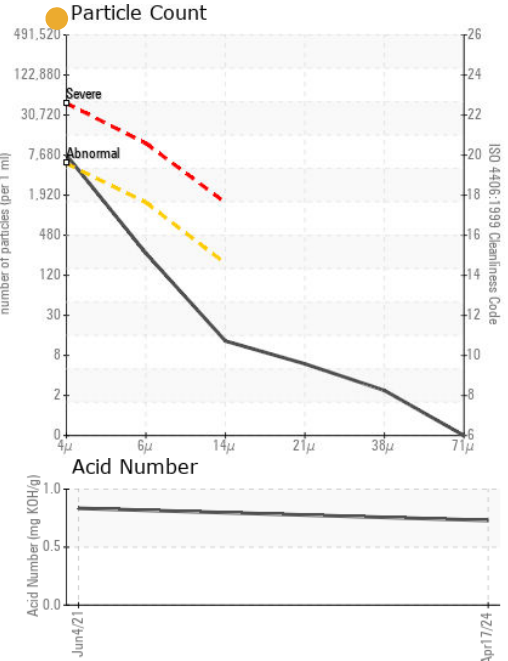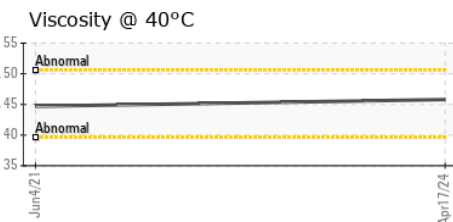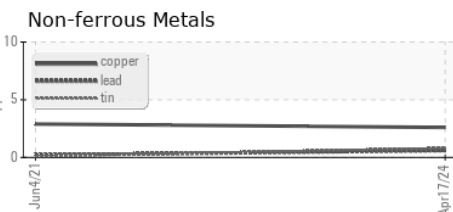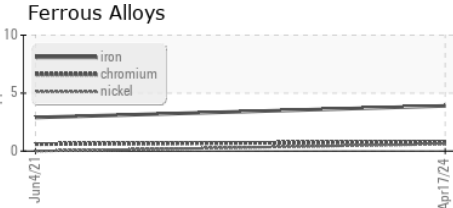

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0923383 **Received** : 17 May 2024
Lab Number : **06183303** **Tested** : 20 May 2024
Unique Number : 11034629 **Diagnosed** : 21 May 2024 - Don Baldrige
Test Package : CONST

MANHATTAN ROAD AND BRIDGE
 5601 S 122ND E AVE
 TULSA, OK
 US 74146
 Contact: BEN CALDWELL
 kevin.marson@wearcheck.com
 T: (918)728-5749
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)