




OIL ANALYSIS REPORT

Sample Rating Trend

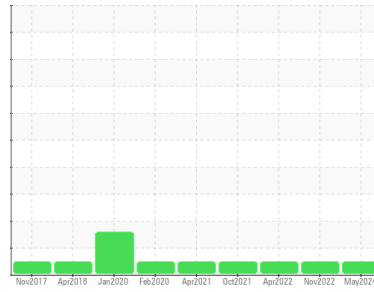

NORMAL



Machine Id

MANN'S X6

Component

Starboard Gearbox

Fluid

CHEVRON DELO 100 SAE 40 (5 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | | KL0013503 | KL0008973 | KL0008931 |
| Sample Date | Client Info | | | 01 May 2024 | 30 Nov 2022 | 20 Apr 2022 |
| Machine Age | hrs | Client Info | | 15067 | 12756 | 11386 |
| Oil Age | hrs | Client Info | | 1000 | 1370 | 1157 |
| Oil Changed | Client Info | | | Changed | Changed | Changed |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---------------|-----------|--------|------------|------------|----------|----------|
| Water | WC Method | | >0.2 | NEG | NEG | NEG |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m | >200 | 32 | 26 | 23 |
| Chromium | ppm | ASTM D5185m | >10 | <1 | 0 | 0 |
| Nickel | ppm | ASTM D5185m | >10 | 2 | 0 | <1 |
| Titanium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Silver | ppm | ASTM D5185m | | <1 | 0 | <1 |
| Aluminum | ppm | ASTM D5185m | >25 | 3 | 4 | 4 |
| Lead | ppm | ASTM D5185m | >50 | 8 | 8 | 7 |
| Copper | ppm | ASTM D5185m | >200 | 115 | 141 | 104 |
| Tin | ppm | ASTM D5185m | >10 | 8 | 8 | 7 |
| Antimony | ppm | ASTM D5185m | >5 | --- | --- | --- |
| Vanadium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | <1 | 0 | 0 |

| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m | | 180 | 150 | 171 |
| Barium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 102 | 48 | 108 |
| Manganese | ppm | ASTM D5185m | | <1 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m | | 1036 | 813 | 1040 |
| Calcium | ppm | ASTM D5185m | | 571 | 1056 | 525 |
| Phosphorus | ppm | ASTM D5185m | 980 | 925 | 815 | 940 |
| Zinc | ppm | ASTM D5185m | 1080 | 1019 | 857 | 1041 |
| Sulfur | ppm | ASTM D5185m | | 3799 | 3356 | 2472 |


| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|-------------|------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185m | >50 | 6 | 4 | 5 |
| Sodium | ppm | ASTM D5185m | | <1 | 2 | 1 |
| Potassium | ppm | ASTM D5185m | >20 | 2 | 0 | 0 |

| FLUID CLEANLINESS | | method | limit/base | current | history1 | history2 |
|-------------------|--|--------------|------------|--------------|----------|----------|
| Particles >4µm | | ASTM D7647 | | 9213 | 4604 | 113346 |
| Particles >6µm | | ASTM D7647 | >5000 | 232 | 345 | 4857 |
| Particles >14µm | | ASTM D7647 | >640 | 12 | 12 | 23 |
| Particles >21µm | | ASTM D7647 | >160 | 3 | 3 | 5 |
| Particles >38µm | | ASTM D7647 | >40 | 0 | 0 | 0 |
| Particles >71µm | | ASTM D7647 | >10 | 0 | 0 | 0 |
| Oil Cleanliness | | ISO 4406 (c) | >19/16 | 15/11 | 16/11 | 19/12 |




OIL ANALYSIS REPORT


Particle Trend

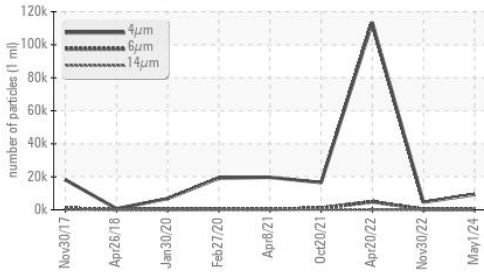


Acid Number

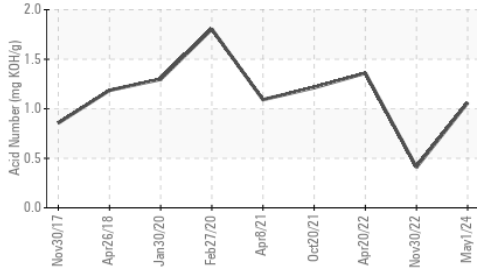

Viscosity @ 40°C

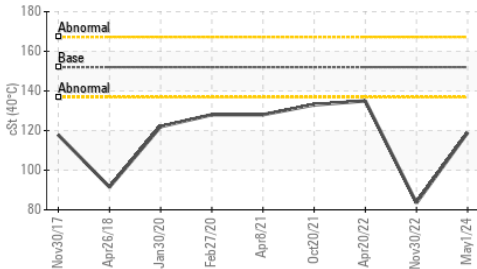

Particle Trend

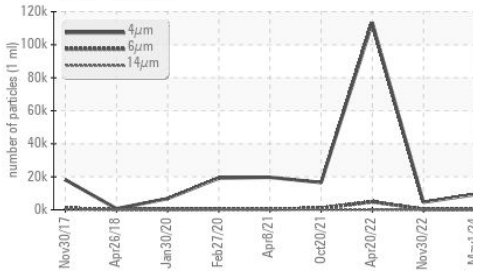

| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-------------------|----------|------------|------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 | | 1.06 | 0.41 | 1.36 |

| VISUAL | | method | limit/base | current | history1 | history2 |
|------------------|--------|---------|------------|--------------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | LIGHT | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG | NEG |

| FLUID PROPERTIES | | method | limit/base | current | history1 | history2 |
|------------------|-----|-----------|------------|------------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 | 152 | 119 | 83.5 | 135 |

| SAMPLE IMAGES | | method | limit/base | current | history1 | history2 |
|---------------|--|--------|------------|---------|----------|----------|
|---------------|--|--------|------------|---------|----------|----------|


Color

Bottom




GRAPHS


Ferrous Alloys

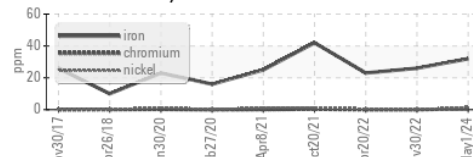


Non-ferrous Metals

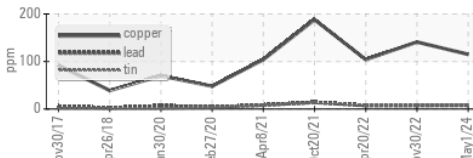


Viscosity @ 40°C

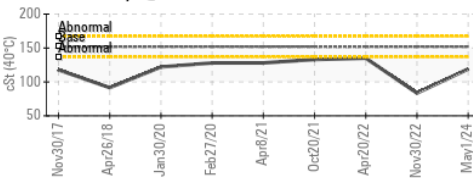

Particle Count

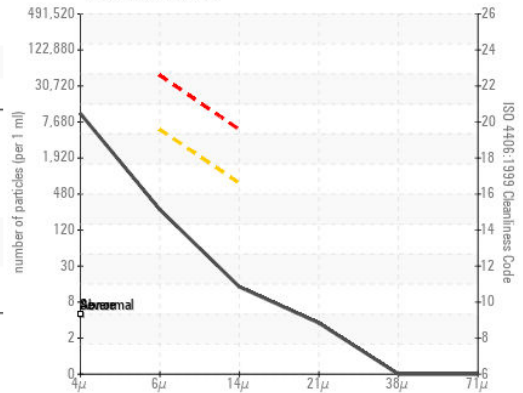

Acid Number

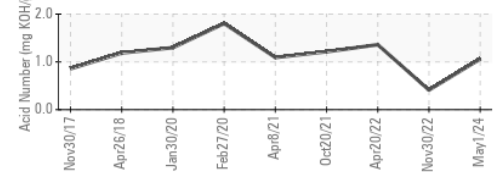

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : KL0013503

Lab Number : 06183324

Unique Number : 11034650

Test Package : MOB 2 (Additional Tests: PrtCount)

Received : 17 May 2024

Tested : 20 May 2024

Diagnosed : 21 May 2024 - Don Baldrige

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

EXPEDITIONS

658 FRONT ST, SUITE 127

LAHAINA, HI

US 96761

Contact: BILL CALDWELL

bill@go-lanai.com

T: (800)695-2624

F: (808)661-0544