

OIL ANALYSIS REPORT

Sample Rating Trend

WEAR

Machine Id

KAESER SX 7.5 8382249 (S/N 11866)

Compressor Fluid

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

🔺 Wear

The copper level is abnormal. All other component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		Apr202	3 Aug ² 023	Nov2023 A	ipr2024	
SAMPLE INFORM		un able a al	line it /b e e e		history of	history O
		method	limit/base		history1	history2
Sample Number		Client Info		KC130126	KC124846	KC06005634
Sample Date	bro	Client Info Client Info		02 Apr 2024	07 Nov 2023	23 Aug 2023
Machine Age Oil Age	hrs hrs	Client Info		12594 4000	9330 0	7766 0
Oil Changed	1115				N/A	N/A
Sample Status		Client Info		Changed ABNORMAL	ABNORMAL	SEVERE
WEAR METALS		method	limit/base	current	history1	history2
Iron	nnm	ASTM D5185m	>50	<1	0	3
Chromium	ppm ppm	ASTM D5185m		<1	0	0
Nickel		ASTM D5185m	>3	<1	0	0
	ppm			<1	0	0
Titanium	ppm	ASTM D5185m				
Silver	ppm	ASTM D5185m	>2	<1 2	0	0
Aluminum	ppm	ASTM D5185m	>10		0	0
Lead	ppm	ASTM D5185m	>10	<1	0	1
Copper	ppm		>50	<u> </u>	6	▲ 61
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	0	15	0
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m	90	<1	22	0
Calcium	ppm	ASTM D5185m	2	4	0	0
Phosphorus	ppm	ASTM D5185m		7	0	0
Zinc	ppm	ASTM D5185m		<1	5	0
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	5	<1	16
Sodium	ppm	ASTM D5185m		0	7	1
Potassium	ppm	ASTM D5185m	>20	1	<1	2
Water	%	ASTM D6304	>0.05	0.003	0 .164	4 .16
ppm Water	ppm	ASTM D6304	>500	33	1 640	4 1600
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		10405		2958
Particles >6µm		ASTM D7647	>1300	<u> </u>		🔺 1611
Particles >14µm		ASTM D7647	>80	<u> </u>		A 274
Particles >21µm		ASTM D7647	>20	<u> </u>		9 2
Particles >38µm		ASTM D7647	>4	<u> </u>		1 4
Particles >71µm		ASTM D7647	>3	1		1
Oil Cleanliness		ISO 4406 (c)	>/17/13	1 /19/16		▲ 19/18/15
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.20	0.30	0.28


COMPRES SOR


Built for a lifetime

OIL ANALYSIS REPORT

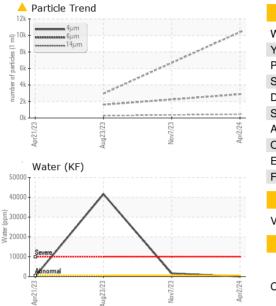








VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	HEAVY	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	0.2%	▲ 0.2%
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	43.4	43.6	44.7
SAMPLE IMAGES		method	limit/base	current	history1	history2

Color



Bottom

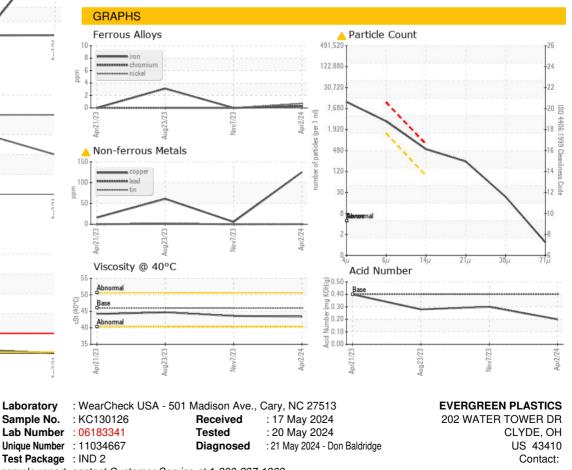

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: EVECLYKC [WUSCAR] 06183341 (Generated: 05/21/2024 18:43:18) Rev: 1

Certificate 12367

Contact/Location: ? ? - EVECLYKC Page 2 of 2

T: F: