


## **OIL ANALYSIS REPORT**

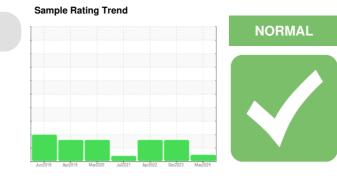

Machine Id

# KAESER AIRTOWER 7.5 5672023 (S/N 1030)

Component Compressor

Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2	
Sample Number		Client Info		KCPA016660	KCPA010131	KCP45673	
Sample Date		Client Info		07 May 2024	29 Dec 2023	13 Apr 2022	
Machine Age	hrs	Client Info		15940	15391	11871	
Oil Age	hrs	Client Info		549	0	0	
Oil Changed		Client Info		Not Changd	N/A	Changed	
Sample Status				NORMAL	ABNORMAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>50	1	0	0	
Chromium	ppm	ASTM D5185m	>10	<1	0	0	
Nickel	ppm	ASTM D5185m	>3	<1	<1	0	
Titanium	ppm	ASTM D5185m	>3	<1	0	0	
Silver	ppm	ASTM D5185m	>2	<1	0	0	
Aluminum	ppm	ASTM D5185m	>10	2	<1	0	
Lead	ppm	ASTM D5185m	>10	<1	<1	0	
Copper	ppm	ASTM D5185m	>50	11	2	18	
Tin	ppm	ASTM D5185m	>10	1	<1	0	
Antimony	ppm	ASTM D5185m					
Vanadium	ppm	ASTM D5185m		<1	0	0	
Cadmium	ppm	ASTM D5185m		<1	0	0	
ADDITIVES		method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	0	0	0	
Barium	ppm	ASTM D5185m	90	8	48	0	
Molybdenum	ppm	ASTM D5185m	0	<1	0	0	
Manganese	ppm	ASTM D5185m	U	<1	<1	0	
Magnesium	ppm	ASTM D5185m	100	26	51	0	
Calcium	ppm	ASTM D5185m		5	3	0	
Phosphorus	ppm	ASTM D5185m	0	81	172	3	
Zinc	ppm	ASTM D5185m		19	21	8	
Sulfur		ASTM D5185m	23500	20262	10368	15121	
	ppm						
CONTAMINANTS		method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	1	<1	5	
Sodium	ppm	ASTM D5185m		5	3	0	
Potassium	ppm	ASTM D5185m		3	<1	0	
Water	%	ASTM D6304		0.016	0.016	0.002	
ppm Water	ppm	ASTM D6304	>500	168	167	16.5	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2	
Particles >4µm		ASTM D7647		4535	23712	8126	
Particles >6µm		ASTM D7647		608	<b>▲</b> 7103	<b>2</b> 814	
Particles >14µm		ASTM D7647	>80	47	<b>4</b> 44	▲ 321	
Particles >21µm		ASTM D7647		18	<u> </u>	<u> </u>	
Particles >38µm		ASTM D7647	>4	2	1	4	
Particles >71µm		ASTM D7647		0	0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	19/16/13	<u>22/20/16</u>	<b>a</b> 20/19/16	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2	
Acid Number (AN) 53:14) Rev: 1	mg KOH/g	ASTM D8045	1.0	0.40 0.72 0.40 0.72 0.40 0.72 0.40			


Report Id: UPSLAW [WUSCAR] 06183352 (Generated: 05/21/2024 18:53:14) Rev: 1


Contact/Location: R. DINSMORE - UPSLAW



# **OIL ANALYSIS REPORT**

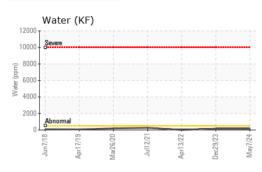



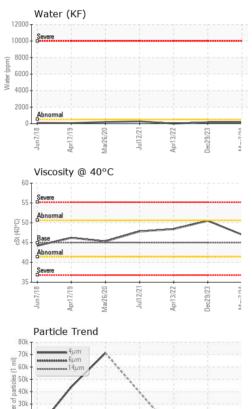


Mar26/20

20

10

0

White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	47.0	50.5	48.4
SAMPLE IMAGES	3	method	limit/base	current	history1	history2
Color						J
Bottom						

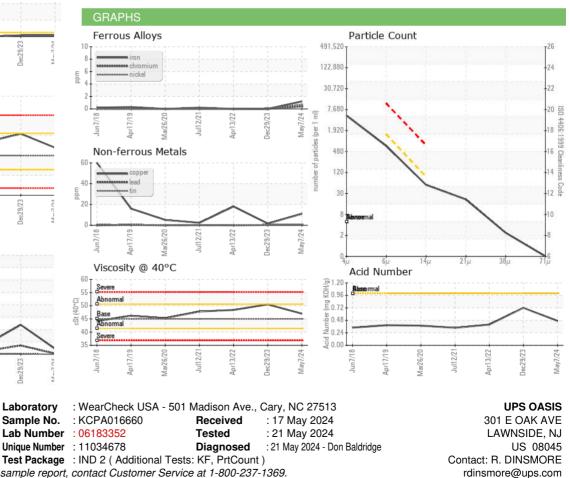

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: UPSLAW [WUSCAR] 06183352 (Generated: 05/21/2024 18:53:14) Rev: 1

Certificate 12367

Contact/Location: R. DINSMORE - UPSLAW

Т:

F: