




# OIL ANALYSIS REPORT

Sample Rating Trend

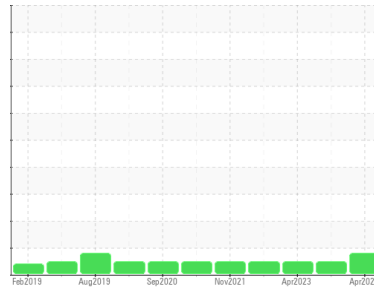

## CONTAMINANT



Machine Id  
**BACON MIXER - RED (S/N 10064269)**  
 Component  
**Gearbox**  
 Fluid  
**PETRO CANADA PURITY FG EP GEAR FLUID 460 (--- GAL)**

### DIAGNOSIS

#### ● Recommendation

Resample at the next service interval to monitor.

#### ● Wear

All component wear rates are normal.

#### ● Contamination

Appearance is hazy. There is no indication of any contamination in the oil.

#### ● Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0773911</b>	WC0794759	WC0667253
Sample Date	Client Info		<b>20 Apr 2024</b>	30 Nov 2023	04 Apr 2023
Machine Age	mths	Client Info	<b>0</b>	0	0
Oil Age	mths	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ATTENTION</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184		<b>35</b>	53	12
Iron	ppm	ASTM D5185m >200	<b>38</b>	24	20
Chromium	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	<b>2</b>	0	<1
Silver	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>2</b>	0	<1
Lead	ppm	ASTM D5185m >100	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m >200	<b>&lt;1</b>	0	0
Tin	ppm	ASTM D5185m >25	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185m	<b>&lt;1</b>	0	4
Calcium	ppm	ASTM D5185m	<b>4</b>	0	0
Phosphorus	ppm	ASTM D5185m 135	<b>189</b>	140	172
Zinc	ppm	ASTM D5185m	<b>3</b>	0	9
Sulfur	ppm	ASTM D5185m 660	<b>798</b>	667	864

### CONTAMINANTS




	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	<b>7</b>	4	4
Sodium	ppm	ASTM D5185m	<b>0</b>	0	<1
Potassium	ppm	ASTM D5185m >20	<b>2</b>	0	0

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.54	<b>0.34</b>	0.28	0.37




# OIL ANALYSIS REPORT

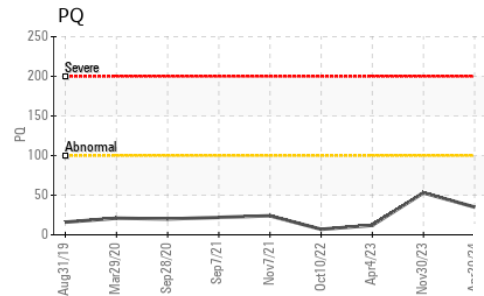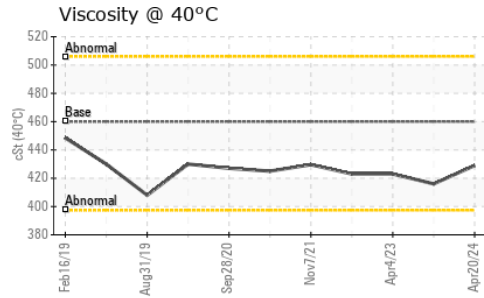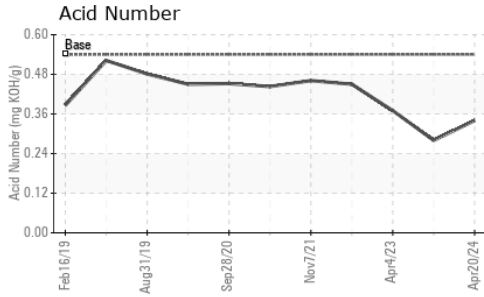






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	LIGHT
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	HAZY	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	460	429	416

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

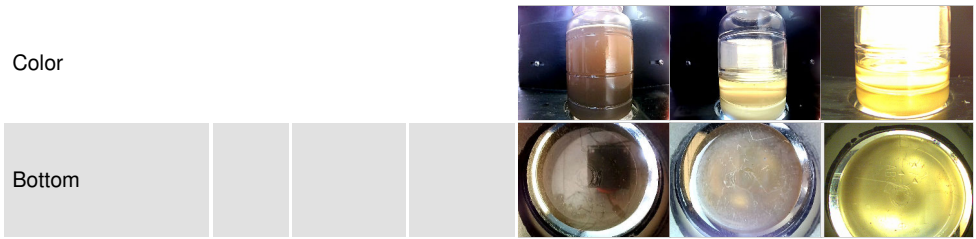

## GRAPHS

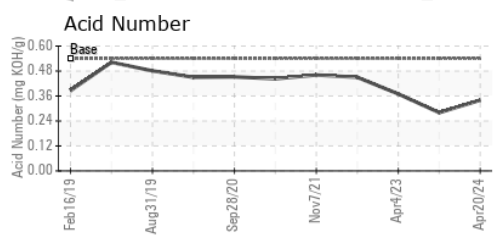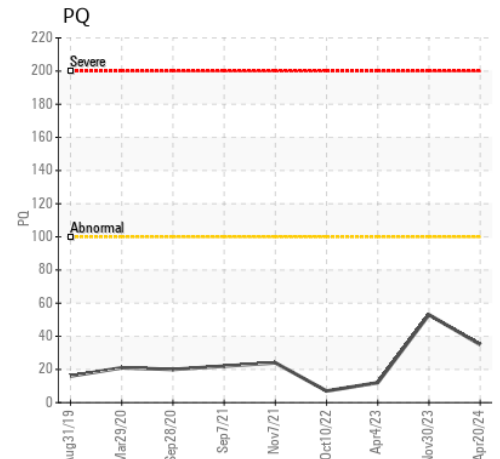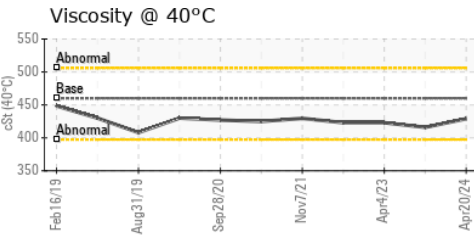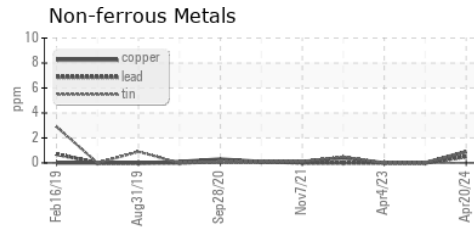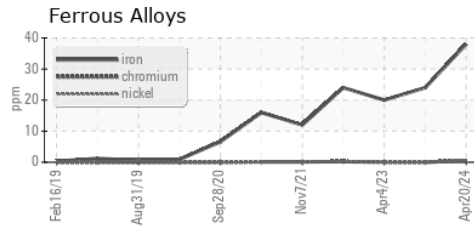

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0773911 **Received** : 17 May 2024  
**Lab Number** : 06183409 **Tested** : 20 May 2024  
**Unique Number** : 11034735 **Diagnosed** : 21 May 2024 - Don Baldrige  
**Test Package** : IND 2 ( Additional Tests: PQ )

**WORTHINGTON FOODS INC**  
 1675 FAIRVIEW ROAD  
 ZANESVILLE, OH  
 US 43701-5168  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: