




# OIL ANALYSIS REPORT

## Sample Rating Trend

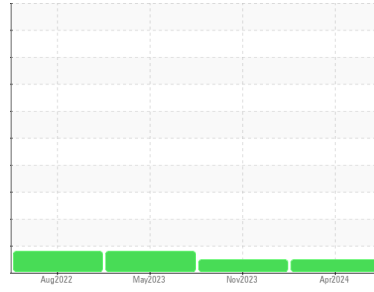

**NORMAL**



Area

[21037]

Machine Id

20-80

Component

Right Final Drive

Fluid

CONOCO PHILLIPS 80W90 MP (--- GAL)

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: ConocoPhillips 80w/90 mp gear oil )

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0923392</b>	WC0836130	WC0802425
Sample Date	Client Info			<b>17 Apr 2024</b>	03 Nov 2023	25 May 2023
Machine Age	hrs	Client Info		<b>7096</b>	6510	6026
Oil Age	hrs	Client Info		<b>1076</b>	484	488
Oil Changed	Client Info			<b>Changed</b>	Not Changd	Changed
Sample Status				<b>NORMAL</b>	NORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	<b>164</b>	170	▲ 672
Chromium	ppm	ASTM D5185m	>10	<b>2</b>	2	10
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m		<b>1</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>1</b>	<1	4
Lead	ppm	ASTM D5185m	>25	<b>2</b>	1	4
Copper	ppm	ASTM D5185m	>50	<b>7</b>	7	29
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	2
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>1</b>	<1	3
Barium	ppm	ASTM D5185m		<b>0</b>	7	0
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Manganese	ppm	ASTM D5185m		<b>2</b>	1	6
Magnesium	ppm	ASTM D5185m		<b>3</b>	2	<1
Calcium	ppm	ASTM D5185m		<b>8</b>	38	37
Phosphorus	ppm	ASTM D5185m		<b>251</b>	268	330
Zinc	ppm	ASTM D5185m		<b>4</b>	9	7
Sulfur	ppm	ASTM D5185m		<b>18262</b>	18253	20938

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	<b>7</b>	6	22
Sodium	ppm	ASTM D5185m		<b>2</b>	0	2
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	2	4

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG



# OIL ANALYSIS REPORT



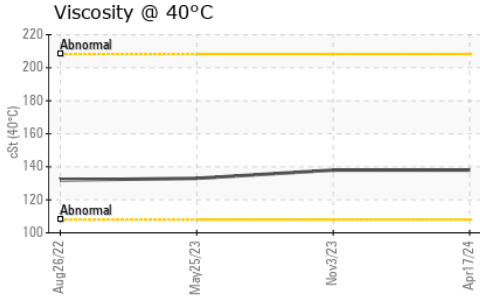


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	138	138	133

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image	no image
Bottom		no image	no image	no image

## GRAPHS

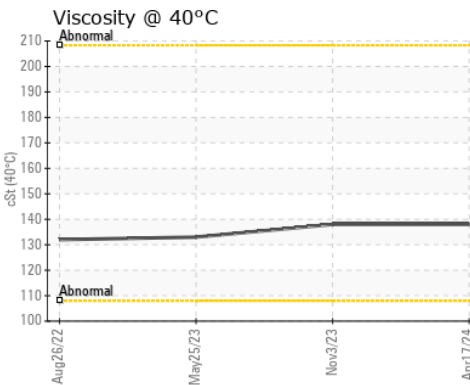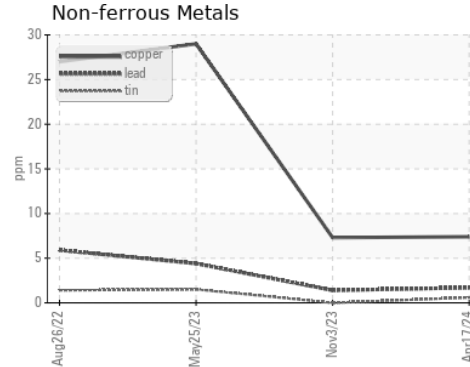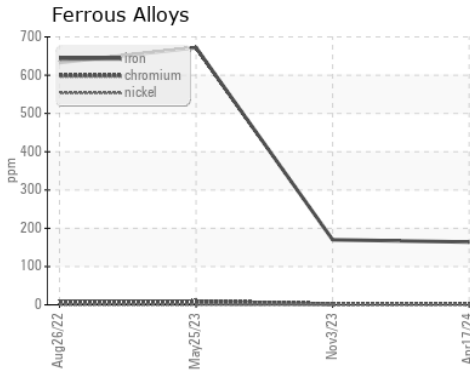

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0923392      **Received** : 17 May 2024  
**Lab Number** : 06183571      **Tested** : 21 May 2024  
**Unique Number** : 11034897      **Diagnosed** : 21 May 2024 - Don Baldrige  
**Test Package** : CONST

**MANHATTAN ROAD AND BRIDGE**  
 5601 S 122ND E AVE  
 TULSA, OK 74146  
 Contact: LANCE HARMON  
 lance.harmon@manhattanrb.com  
 T: (918)576-9071  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)