




OIL ANALYSIS REPORT

Sample Rating Trend

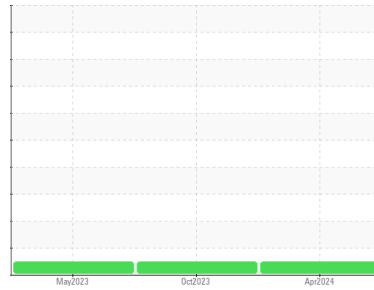

NORMAL



Machine Id

CATERPILLAR D6 DOZER 102

Component

Hydraulic System

Fluid

PETRO CANADA 10W (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0893831	WC0822232	WC0822411
Sample Date	Client Info			20 Apr 2024	20 Oct 2023	22 May 2023
Machine Age	hrs	Client Info		15769	15298	14706
Oil Age	hrs	Client Info		470	297	246
Oil Changed	Client Info			Not Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	4	3	5
Chromium	ppm	ASTM D5185m	>10	1	1	2
Nickel	ppm	ASTM D5185m	>10	0	0	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		<1	0	<1
Aluminum	ppm	ASTM D5185m	>10	4	3	5
Lead	ppm	ASTM D5185m	>10	<1	<1	2
Copper	ppm	ASTM D5185m	>75	3	3	6
Tin	ppm	ASTM D5185m	>10	<1	0	1
Vanadium	ppm	ASTM D5185m		<1	0	<1
Cadmium	ppm	ASTM D5185m		0	<1	<1


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		105	110	103
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		4	5	6
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m		39	42	52
Calcium	ppm	ASTM D5185m		3102	3034	3161
Phosphorus	ppm	ASTM D5185m		1154	1092	1086
Zinc	ppm	ASTM D5185m		1320	1322	1369
Sulfur	ppm	ASTM D5185m		3602	3472	3507

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	12	11	13
Sodium	ppm	ASTM D5185m		<1	<1	4
Potassium	ppm	ASTM D5185m	>20	3	2	2

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG











OIL ANALYSIS REPORT

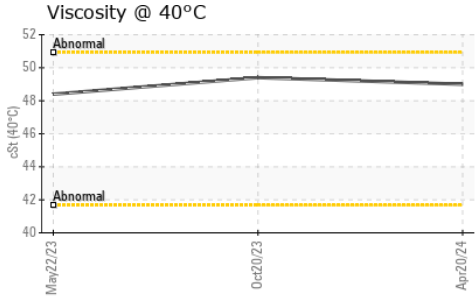

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	49.0	49.4	48.4

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	
Bottom			no image	no image	

GRAPHS

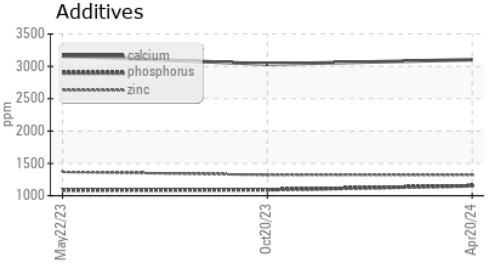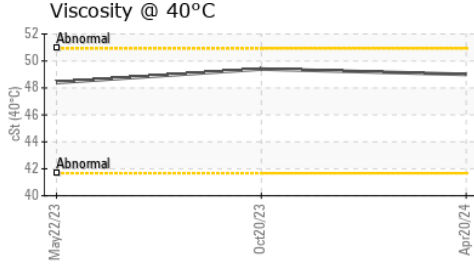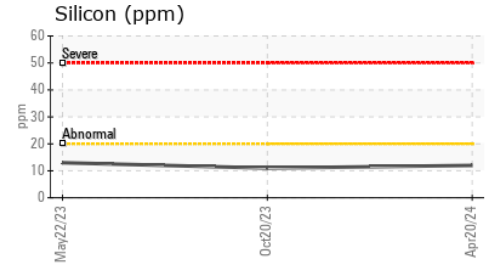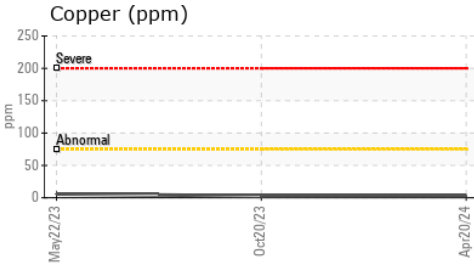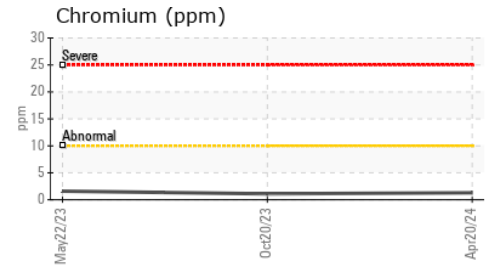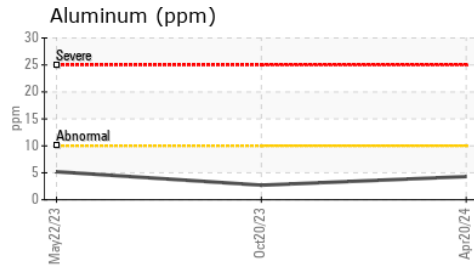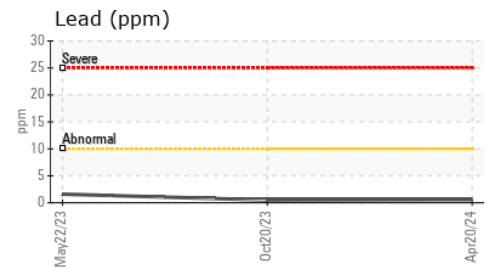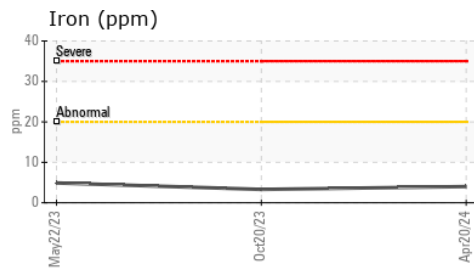

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0893831 **Received** : 17 May 2024
Lab Number : 06183589 **Tested** : 21 May 2024
Unique Number : 11034915 **Diagnosed** : 21 May 2024 - Don Baldrige
Test Package : MOB 1

C.L. BENTON & SONS INC
 706 38TH AVE N
 MYRTLE BEACH, SC
 US 29577
 Contact: JAMIE HUCKS
 shop@clbenton.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)