


OIL ANALYSIS REPORT

Sample Rating Trend





Area **TULSA** [23094] 30-101

Diesel Engine

CAT DIESEL ENGINE OIL 15W40 (--- GAL)

	SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
	Sample Number		Client Info		WC0923380		
) has been	Sample Date		Client Info		08 May 2024		
nple to	Machine Age	hrs	Client Info		291		
	Oil Age	hrs	Client Info		291		
	Oil Changed		Client Info		Changed		
nts first oil	Sample Status				ABNORMAL		
	CONTAMINATIO	N	method	limit/base	current	history1	history2
esent in the	Water		WC Method	>0.2	NEG		
el in the oil.	Glycol		WC Method		NEG		
uitable	WEAR METALS		method	limit/base	current	history1	history2
present in the	Iron	ppm	ASTM D5185m	>100	33		
il is no longer	Chromium	ppm	ASTM D5185m	>20	1		
ntaminants.	Nickel	ppm	ASTM D5185m	>2	0		
	Titanium	ppm	ASTM D5185m	>2	0		
	Silver	ppm	ASTM D5185m	>2	0		
	Aluminum	ppm	ASTM D5185m	>25	2		
	Lead	ppm	ASTM D5185m	>40	0		
	Copper	ppm	ASTM D5185m	>330	9		
	Tin	ppm	ASTM D5185m	>15	<1		
	Vanadium	ppm	ASTM D5185m		0		
	Cadmium	ppm	ASTM D5185m		0		
	ADDITIVES		method	limit/base	current	history1	history2
	Boron	ppm	ASTM D5185m		52		
	Barium	ppm	ASTM D5185m		3		
	Molybdenum	ppm	ASTM D5185m		36		
	Manganese	ppm	ASTM D5185m		11		
	Magnesium	ppm	ASTM D5185m		454		
	Calcium	ppm	ASTM D5185m		1697		
	Phosphorus	ppm	ASTM D5185m		938		
	Phosphorus Zinc	ppm ppm	ASTM D5185m ASTM D5185m	1460	938 1112		
	·			1460			
	Zinc	ppm ppm	ASTM D5185m	1460 limit/base	1112		
	Zinc Sulfur	ppm ppm	ASTM D5185m ASTM D5185m	limit/base	1112 3309		
	Zinc Sulfur CONTAMINANTS	ppm ppm	ASTM D5185m ASTM D5185m method	limit/base	1112 3309 current	 history1	 history2
	Zinc Sulfur CONTAMINANTS Silicon	ppm ppm	ASTM D5185m ASTM D5185m method ASTM D5185m	limit/base	1112 3309 current 15	 history1	 history2
	Zinc Sulfur CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m	limit/base >25 >20	1112 3309 current 15 4	 history1 	 history2
	Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m Method ASTM D5185m ASTM D5185m ASTM D5185m	limit/base >25 >20	1112 3309 current 15 4 0	 history1 	 history2
	Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m Method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D3524	limit/base >25 >20 >5 limit/base	1112 3309 current 15 4 0 0 ▶ 5.9	 history1 	 history2
	Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel INFRA-RED	ppm ppm ppm ppm ppm %	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D3524 Method *ASTM D7844	limit/base >25 >20 >5 limit/base >3	1112 3309 current 15 4 0 ▲ 5.9 current	 history1 history1	 history2 history2
	Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel INFRA-RED Soot %	ppm ppm ppm ppm %	ASTM D5185m ASTM D5185m Method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D3524 Method	limit/base >25 >20 >5 limit/base >3 >20	1112 3309 current 15 4 0 ▲ 5.9 current 0.2	 history1 history1 	 history2 history2
	Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm % % Abs/cm Abs/.1mm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D3524 method *ASTM D7844 *ASTM D7624	limit/base >25 >20 >5 limit/base >3 >20	1112 3309 current 15 4 0 ↓ 5.9 current 0.2 6.5	 history1 history1 history1	 history2 history2 history2
	Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm % % Abs/cm Abs/.1mm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D3524 method *ASTM D7844 *ASTM D7624 *ASTM D7415	limit/base >25 >20 >5 limit/base >3 >20 >30 limit/base	1112 3309 current 15 4 0 ▲ 5.9 current 0.2 6.5 20.5	 history1 history1 	 history2 history2 history2

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

Metal levels are typical for a components first oil change.

Contamination


There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.



OIL ANALYSIS REPORT

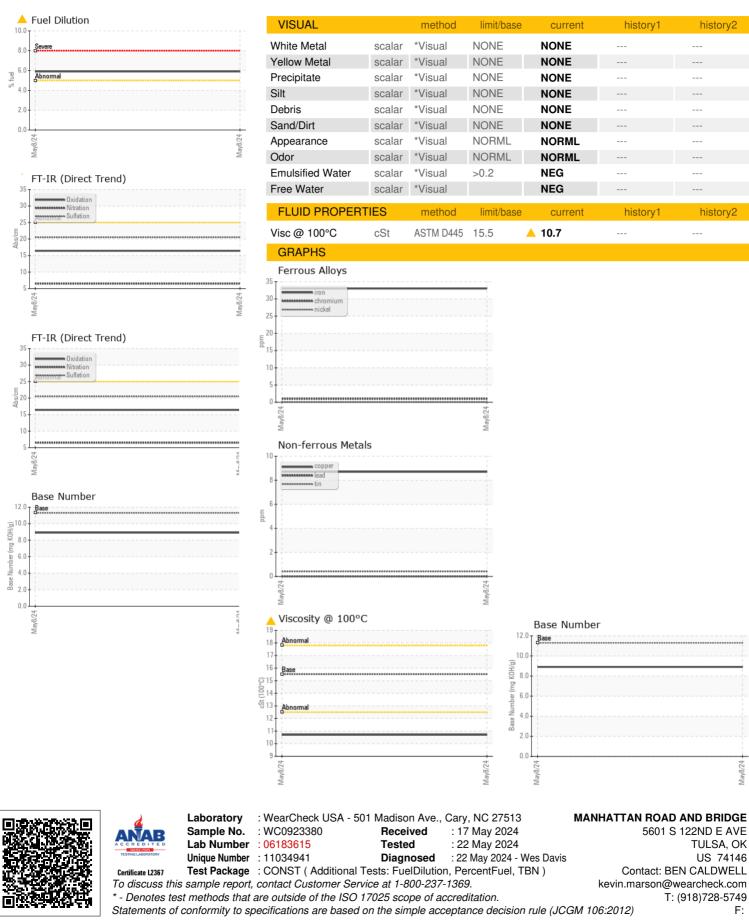

Report Id: MANTUL [WUSCAR] 06183615 (Generated: 05/22/2024 16:57:24) Rev: 1

Submitted By: JAMES STEELMON

Page 2 of 2

E: