




# OIL ANALYSIS REPORT

## Sample Rating Trend

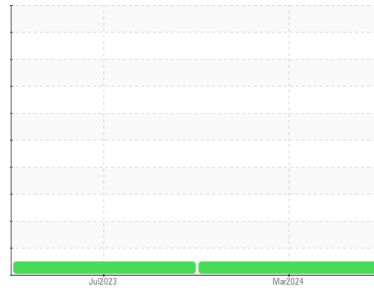

**NORMAL**



Machine Id  
**FREIGHTLINER 49**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

Metal levels are typical for a new component breaking in.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2 |
|---------------|-------------|-------------|--------------------|-------------|----------|
| Sample Number | Client Info |             | <b>WC0917337</b>   | WC05911868  | ---      |
| Sample Date   | Client Info |             | <b>15 Mar 2024</b> | 30 Jul 2023 | ---      |
| Machine Age   | mls         | Client Info | <b>500</b>         | 0           | ---      |
| Oil Age       | mls         | Client Info | <b>500</b>         | 0           | ---      |
| Oil Changed   | Client Info |             | <b>Changed</b>     | N/A         | ---      |
| Sample Status |             |             | <b>NORMAL</b>      | NORMAL      | ---      |

### CONTAMINATION

|        | method    | limit/base | current        | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel   | WC Method | >5         | <b>&lt;1.0</b> | <1.0     | ---      |
| Water  | WC Method | >0.2       | <b>NEG</b>     | NEG      | ---      |
| Glycol | WC Method |            | <b>NEG</b>     | NEG      | ---      |

### WEAR METALS

|          | method | limit/base       | current      | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >80  | <b>20</b>    | 23       | ---      |
| Chromium | ppm    | ASTM D5185m >5   | <b>&lt;1</b> | 6        | ---      |
| Nickel   | ppm    | ASTM D5185m >2   | <b>0</b>     | <1       | ---      |
| Titanium | ppm    | ASTM D5185m      | <b>0</b>     | 0        | ---      |
| Silver   | ppm    | ASTM D5185m >3   | <b>0</b>     | 0        | ---      |
| Aluminum | ppm    | ASTM D5185m >30  | <b>2</b>     | 2        | ---      |
| Lead     | ppm    | ASTM D5185m >30  | <b>&lt;1</b> | 13       | ---      |
| Copper   | ppm    | ASTM D5185m >150 | <b>3</b>     | 2        | ---      |
| Tin      | ppm    | ASTM D5185m >5   | <b>2</b>     | <1       | ---      |
| Vanadium | ppm    | ASTM D5185m      | <b>0</b>     | 0        | ---      |
| Cadmium  | ppm    | ASTM D5185m      | <b>0</b>     | 0        | ---      |

### ADDITIVES

|            | method | limit/base  | current     | history1 | history2 |
|------------|--------|-------------|-------------|----------|----------|
| Boron      | ppm    | ASTM D5185m | <b>2</b>    | 4        | ---      |
| Barium     | ppm    | ASTM D5185m | <b>0</b>    | <1       | ---      |
| Molybdenum | ppm    | ASTM D5185m | <b>61</b>   | 62       | ---      |
| Manganese  | ppm    | ASTM D5185m | <b>3</b>    | 0        | ---      |
| Magnesium  | ppm    | ASTM D5185m | <b>1001</b> | 959      | ---      |
| Calcium    | ppm    | ASTM D5185m | <b>1070</b> | 1131     | ---      |
| Phosphorus | ppm    | ASTM D5185m | <b>1105</b> | 1033     | ---      |
| Zinc       | ppm    | ASTM D5185m | <b>1278</b> | 1257     | ---      |
| Sulfur     | ppm    | ASTM D5185m | <b>3716</b> | 3120     | ---      |

### CONTAMINANTS

|           | method | limit/base      | current   | history1 | history2 |
|-----------|--------|-----------------|-----------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >20 | <b>10</b> | 3        | ---      |
| Sodium    | ppm    | ASTM D5185m     | <b>6</b>  | <1       | ---      |
| Potassium | ppm    | ASTM D5185m >20 | <b>0</b>  | <1       | ---      |

### INFRA-RED




|           | method   | limit/base      | current     | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 >3  | <b>0.1</b>  | 0.2      | ---      |
| Nitration | Abs/cm   | *ASTM D7624 >20 | <b>5.8</b>  | 8.3      | ---      |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | <b>18.3</b> | 20.4     | ---      |

### FLUID DEGRADATION

|                  | method   | limit/base      | current     | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm | *ASTM D7414 >25 | <b>14.5</b> | 17.8     | ---      |
| Base Number (BN) | mg KOH/g | ASTM D2896      | <b>9.5</b>  | 8.3      | ---      |











# OIL ANALYSIS REPORT

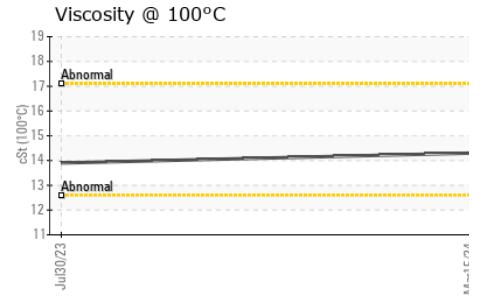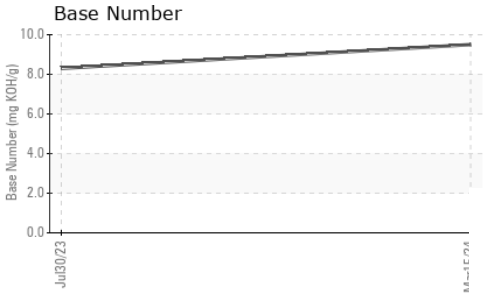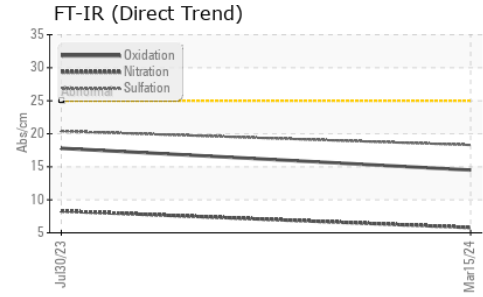

| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | ---      |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | ---      |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | ---      |
| Silt             | scalar | *Visual    | NONE    | NONE     | ---      |
| Debris           | scalar | *Visual    | NONE    | NONE     | ---      |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | ---      |
| Appearance       | scalar | *Visual    | NORML   | NORML    | ---      |
| Odor             | scalar | *Visual    | NORML   | NORML    | ---      |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | ---      |
| Free Water       | scalar | *Visual    |         | NEG      | ---      |

| FLUID PROPERTIES | method | limit/base | current     | history1 | history2 |
|------------------|--------|------------|-------------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | <b>14.3</b> | 13.9     | ---      |

### GRAPHS

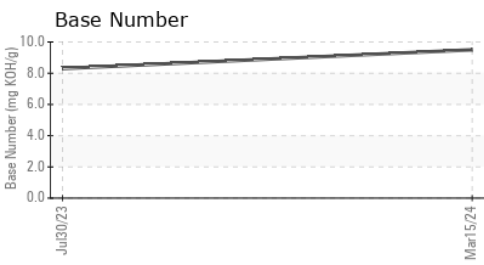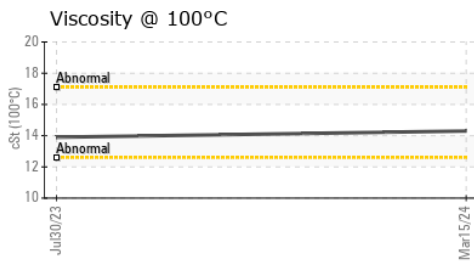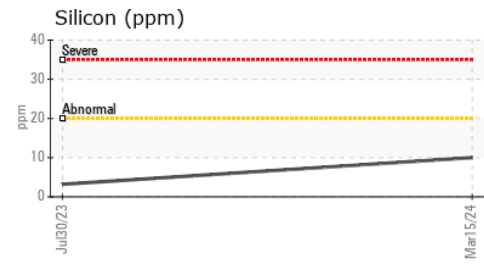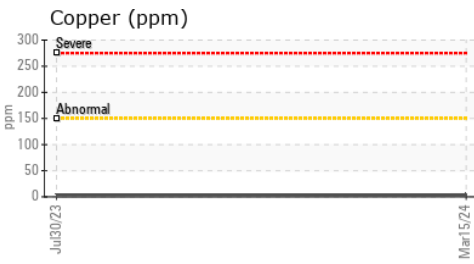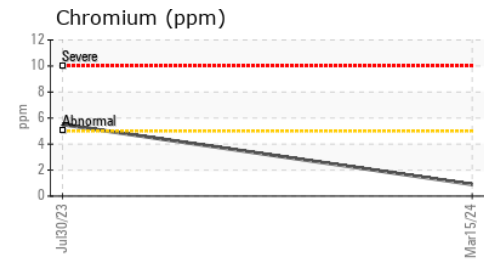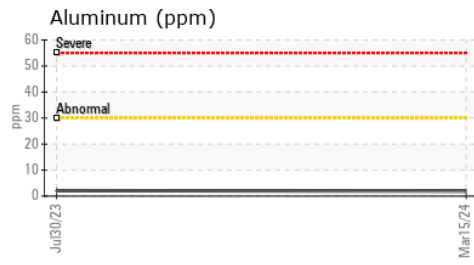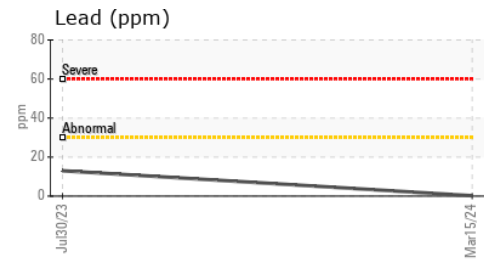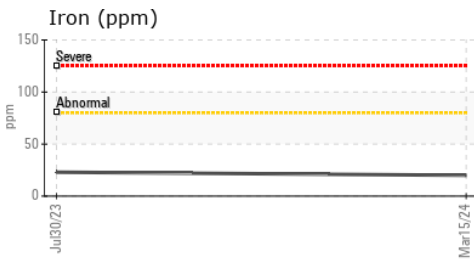

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0917337      **Received** : 17 May 2024  
**Lab Number** : **06183713**      **Tested** : 21 May 2024  
**Unique Number** : 11035039      **Diagnosed** : 21 May 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**C.L. BENTON & SONS INC**  
 706 38TH AVE N  
 MYRTLE BEACH, SC  
 US 29577  
 Contact: JAMIE HUCKS  
 shop@clbenton.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)