




# OIL ANALYSIS REPORT

## Sample Rating Trend

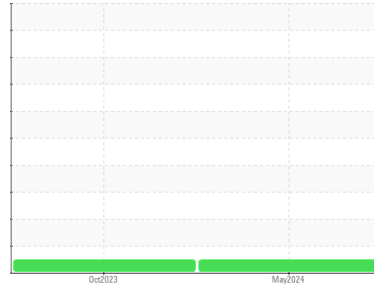

**NORMAL**



Machine Id  
**FORD 30120**  
 Component  
**Diesel Engine**  
 Fluid  
**KENDALL 15W40 (--- QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0867783</b>	WC0867794	---
Sample Date	Client Info			<b>03 May 2024</b>	24 Oct 2023	---
Machine Age	mls	Client Info		<b>374114</b>	367925	---
Oil Age	mls	Client Info		<b>6189</b>	6967	---
Oil Changed	Client Info			<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2		<b>NEG</b>	NEG	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>25</b>	25	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	1	---
Titanium	ppm	ASTM D5185m	>2	<b>92</b>	88	---
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	2	---
Lead	ppm	ASTM D5185m	>40	<b>2</b>	6	---
Copper	ppm	ASTM D5185m	>330	<b>5</b>	7	---
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	6.3	<b>130</b>	86	---
Barium	ppm	ASTM D5185m	0.6	<b>0</b>	5	---
Molybdenum	ppm	ASTM D5185m	0.4	<b>10</b>	8	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	277	<b>486</b>	410	---
Calcium	ppm	ASTM D5185m	1514	<b>1938</b>	1770	---
Phosphorus	ppm	ASTM D5185m	634	<b>1106</b>	1061	---
Zinc	ppm	ASTM D5185m	743	<b>1312</b>	1185	---
Sulfur	ppm	ASTM D5185m	2592	<b>4720</b>	4220	---




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>10</b>	10	---
Sodium	ppm	ASTM D5185m		<b>9</b>	5	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	5	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.8</b>	10.0	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.3</b>	23.2	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>18.7</b>	19.3	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>6.8</b>	6.7	---







# OIL ANALYSIS REPORT

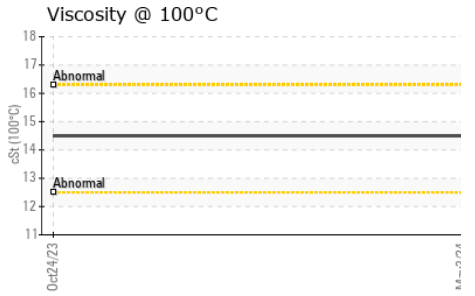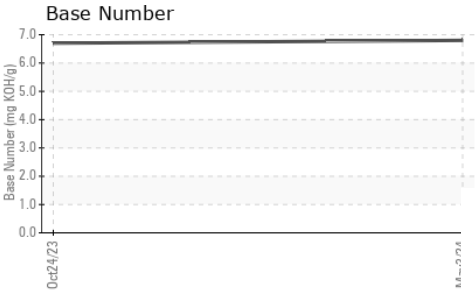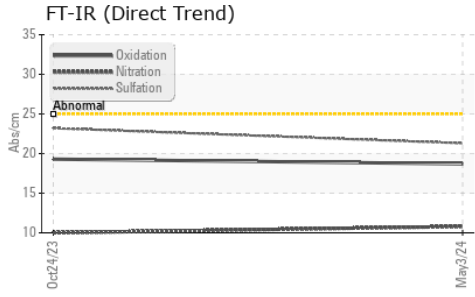

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	<b>14.5</b>	14.5	---

## GRAPHS

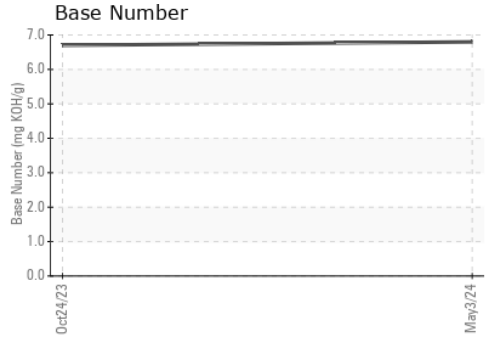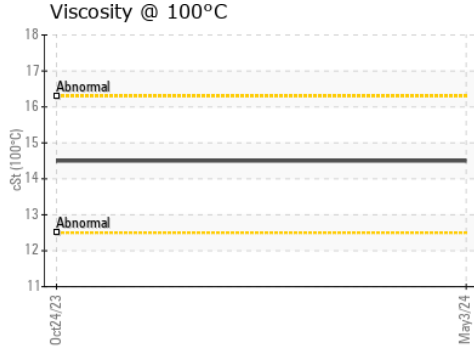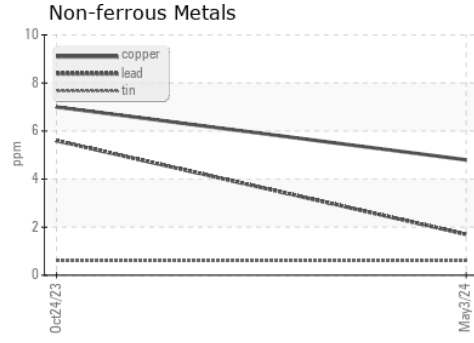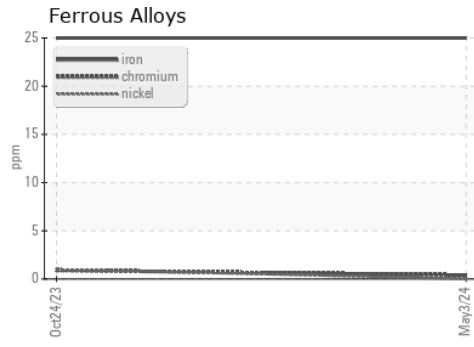

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0867783  
**Lab Number** : **06183732**  
**Unique Number** : 11035058  
**Test Package** : FLEET

**GREENEVILLE OIL & PETROLEUM INC**  
 860 WEST ANDREW JOHNSON HWY  
 GREENEVILLE, TN  
 US 37745  
 Contact: SHOP  
 shop@burkharterprises.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: