




PROBLEM SUMMARY

Sample Rating Trend

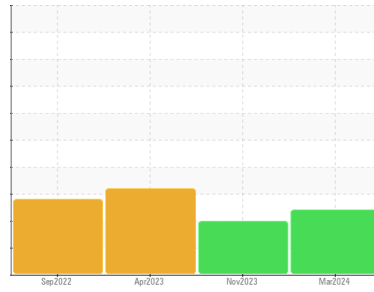

FUEL



Machine Id

14

Component


Diesel Engine

Fluid


DIESEL ENGINE OIL SAE 15W40 (--- QTS)

COMPONENT CONDITION SUMMARY

▲ Fuel Dilution

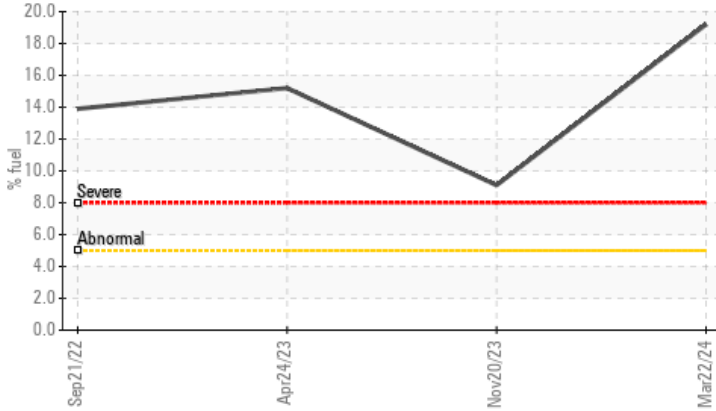

▲ Viscosity @ 100°C

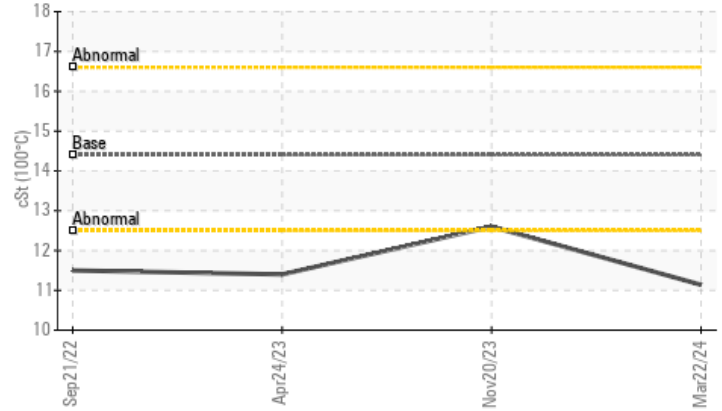

RECOMMENDATION

We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status

Sample Status	%	ASTM D3524	>5	SEVERE	SEVERE	SEVERE
Fuel				▲ 19.2	▲ 9.1	▲ 15.2
Visc @ 100°C	cSt	ASTM D445	14.4	▲ 11.14	12.6	▲ 11.4

Customer Id: CASYANNC

Sample No.: WC0904762

Lab Number: 06183748

Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:

Jonathan Hester +1 919-379-4092 x4092

jhester@wearcheckusa.com

To change component or sample information:

Customer Service +1 1-800-237-1369

customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.

HISTORICAL DIAGNOSIS

20 Nov 2023 Diag: Wes Davis

FUEL



We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. All component wear rates are normal. There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

view report



24 Apr 2023 Diag: Wes Davis

FUEL



We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. All component wear rates are normal. There is a high amount of fuel present in the oil. Light concentration of carbon/soot present in the oil. Tests confirm the presence of fuel in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

view report



21 Sep 2022 Diag: Don Baldrige

FUEL



We advise that you check the fuel injection system. We advise that you check for faulty combustion, plugged air filters, or aftercoolers. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition. Please specify the brand, type, and viscosity of the oil on your next sample. All component wear rates are normal. There is a high amount of fuel present in the oil. There is an abnormal amount of solids and carbon present in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

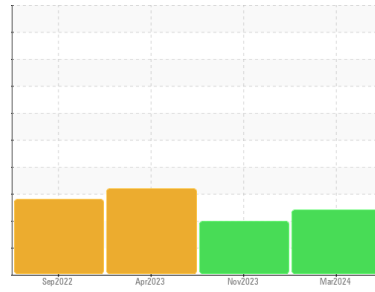

FUEL



Machine Id

14

Component

Diesel Engine

Fluid

DIESEL ENGINE OIL SAE 15W40 (--- QTS)

DIAGNOSIS

▲ Recommendation

We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of fuel present in the oil.

▲ Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0904762	WC0828093	WC0799983
Sample Date	Client Info		22 Mar 2024	20 Nov 2023	24 Apr 2023
Machine Age	mls	Client Info	139397	134660	124303
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			SEVERE	SEVERE	SEVERE

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	68	24	64
Chromium	ppm	ASTM D5185m >20	2	<1	2
Nickel	ppm	ASTM D5185m >4	0	<1	<1
Titanium	ppm	ASTM D5185m	64	66	<1
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	16	8	16
Lead	ppm	ASTM D5185m >40	<1	2	2
Copper	ppm	ASTM D5185m >330	<1	0	<1
Tin	ppm	ASTM D5185m >15	<1	<1	<1
Vanadium	ppm	ASTM D5185m	<1	<1	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	75	105	38
Barium	ppm	ASTM D5185m 10	0	0	0
Molybdenum	ppm	ASTM D5185m 100	9	6	8
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m 450	355	383	582
Calcium	ppm	ASTM D5185m 3000	1329	1412	1121
Phosphorus	ppm	ASTM D5185m 1150	797	889	885
Zinc	ppm	ASTM D5185m 1350	917	1038	1040
Sulfur	ppm	ASTM D5185m 4250	3316	3334	3722

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	7	6	6
Sodium	ppm	ASTM D5185m >158	4	2	5
Potassium	ppm	ASTM D5185m >20	<1	3	2
Fuel	%	ASTM D3524 >5	▲ 19.2	▲ 9.1	▲ 15.2

INFRA-RED





	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	2.9	1.5	▲ 3.3
Nitration	Abs/cm	*ASTM D7624 >20	13.1	9.4	14.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	26.1	21.9	29.6

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	19.0	15.1	23.4
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	8.7	9.7	8.7







OIL ANALYSIS REPORT

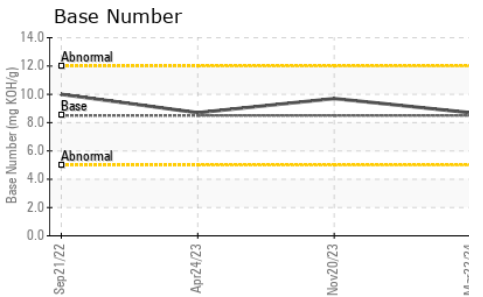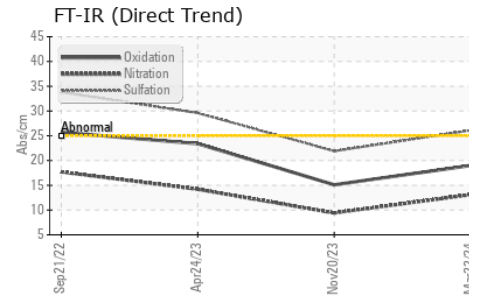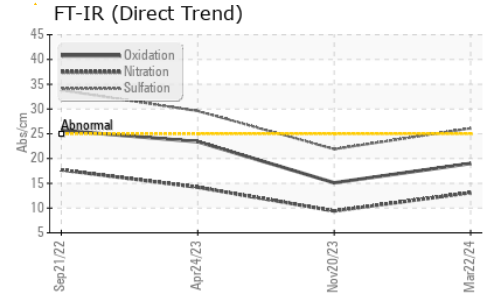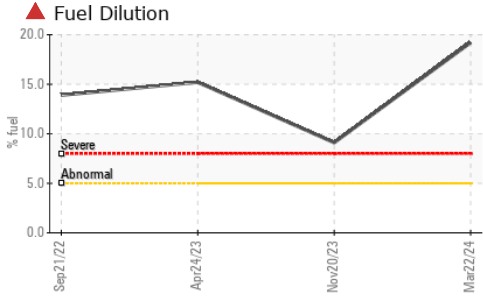

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	▲ 11.14	12.6	▲ 11.4

GRAPHS

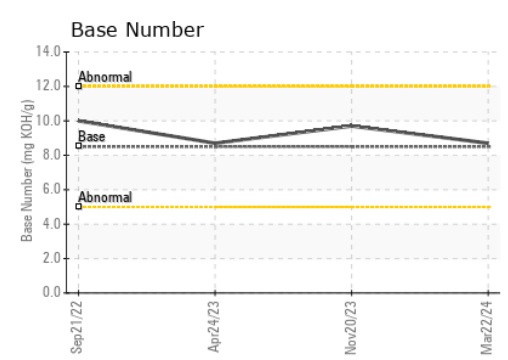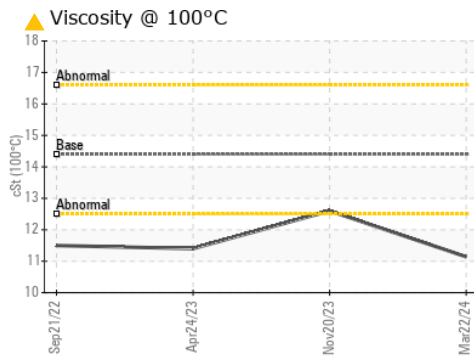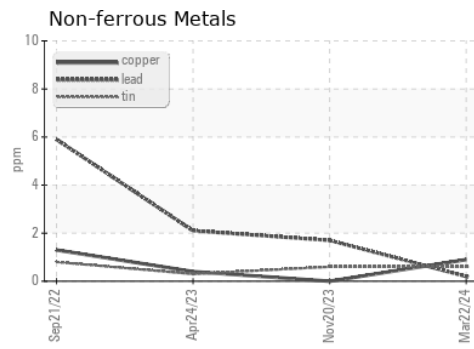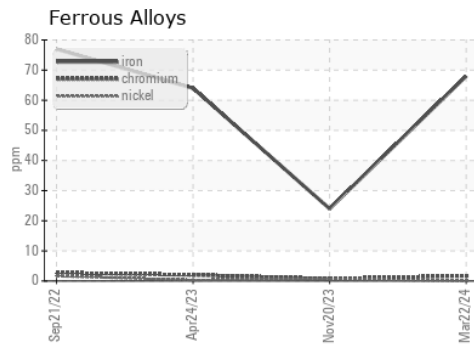

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0904762 **Received** : 17 May 2024
Lab Number : 06183748 **Tested** : 28 May 2024
Unique Number : 11035074 **Diagnosed** : 28 May 2024 - Jonathan Hester
Test Package : FLEET (Additional Tests: PercentFuel)

CASWELL COUNTY SCHOOL BUS
 353 COUNTY HOME ROAD
 YANCEYVILLE, NC
 US 27379
 Contact: DEBRA MOORE
 debra.moore@caswell.k12.nc.us

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)