




OIL ANALYSIS REPORT

Sample Rating Trend

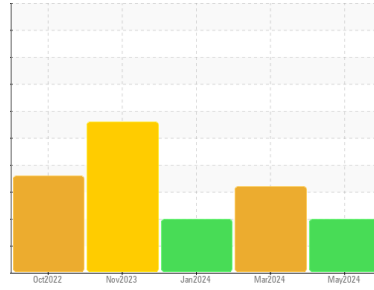

DEGRADATION



Machine Id

12

Component

Diesel Engine

Fluid

DISEL ENGINE OIL SAE 15W40 (--- QTS)

DIAGNOSIS

Recommendation

We advise that you check for faulty combustion, plugged air filters, or aftercoolers. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value.

Wear

All component wear rates are normal.

Contamination

There is an abnormal amount of solids and carbon present in the oil.

Fluid Condition

The BN level is low.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0904717	WC0904763	WC0828073
Sample Date	Client Info		14 May 2024	23 Mar 2024	22 Jan 2024
Machine Age	mls	Client Info	174237	170033	164241
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			ABNORMAL	SEVERE	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	69	79	52
Chromium	ppm	ASTM D5185m >20	1	2	1
Nickel	ppm	ASTM D5185m >4	0	2	1
Titanium	ppm	ASTM D5185m	72	74	65
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	10	13	12
Lead	ppm	ASTM D5185m >40	0	3	2
Copper	ppm	ASTM D5185m >330	<1	2	<1
Tin	ppm	ASTM D5185m >15	<1	<1	1
Vanadium	ppm	ASTM D5185m	<1	1	<1
Cadmium	ppm	ASTM D5185m	0	<1	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	83	75	70
Barium	ppm	ASTM D5185m 10	0	0	0
Molybdenum	ppm	ASTM D5185m 100	10	12	8
Manganese	ppm	ASTM D5185m	<1	1	<1
Magnesium	ppm	ASTM D5185m 450	414	407	418
Calcium	ppm	ASTM D5185m 3000	1592	1577	1459
Phosphorus	ppm	ASTM D5185m 1150	932	942	946
Zinc	ppm	ASTM D5185m 1350	1125	1071	1092
Sulfur	ppm	ASTM D5185m 4250	3945	3365	3380

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	6	8	8
Sodium	ppm	ASTM D5185m >158	7	8	14
Potassium	ppm	ASTM D5185m >20	5	10	21

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	▲ 3.9	▲ 5.9	▲ 4.3
Nitration	Abs/cm	*ASTM D7624 >20	9.1	17.8	14.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	24.9	33.5	29.0


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	11.5	23.4	18.2
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	▲ 0.0	▲ 0.0	▲ 0.0




OIL ANALYSIS REPORT


▲ FT-IR (Direct Trend)

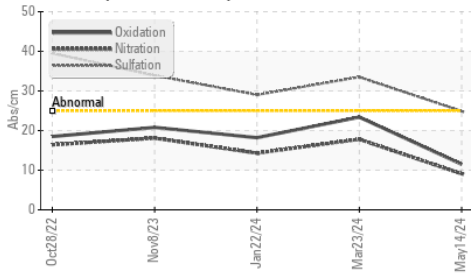


▲ Soot %

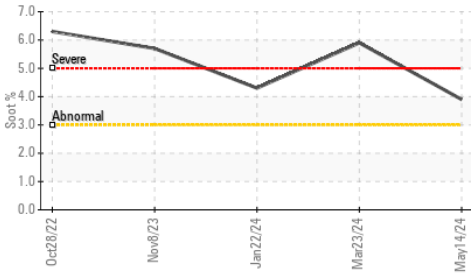

▲ Soot %

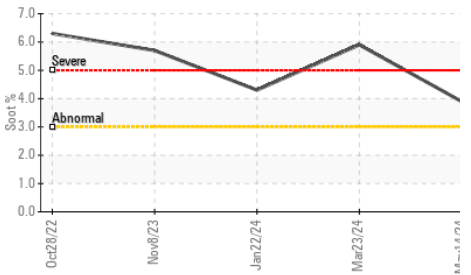

Viscosity @ 100°C

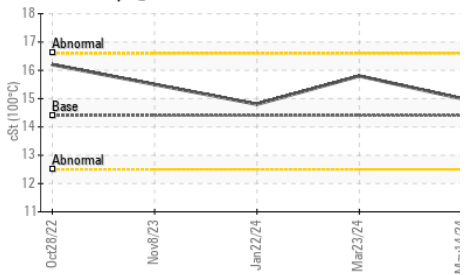


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	15.0	15.8

GRAPHS


Ferrous Alloys

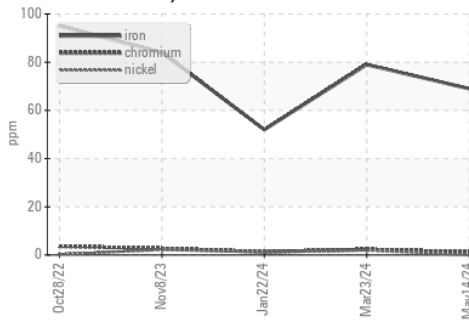


Non-ferrous Metals

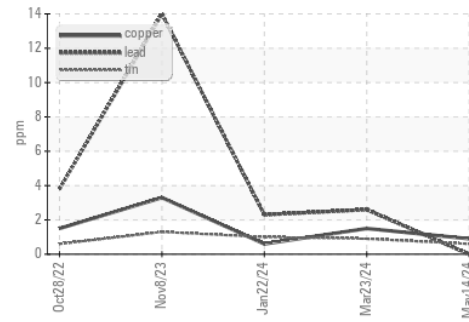

Viscosity @ 100°C

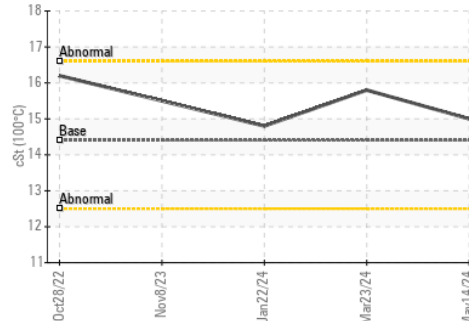

▲ Base Number

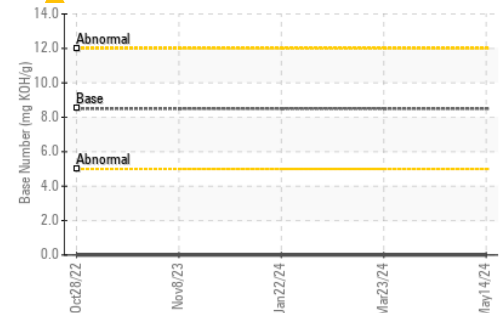

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0904717
Lab Number : 06183760
Unique Number : 11035086
Test Package : FLEET

Received : 17 May 2024
Tested : 22 May 2024
Diagnosed : 22 May 2024 - Jonathan Hester

CASWELL COUNTY SCHOOL BUS
 353 COUNTY HOME ROAD
 YANCEYVILLE, NC
 US 27379
 Contact: DEBRA MOORE
 debra.moore@caswell.k12.nc.us
 T: (336)694-4116
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)