




OIL ANALYSIS REPORT

Sample Rating Trend

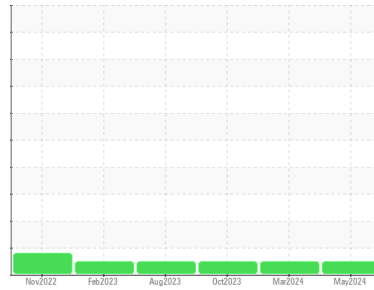

NORMAL



Machine Id

96

Component

Diesel Engine

Fluid

DIESEL ENGINE OIL SAE 15W40 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0904724	WC0828062	WC0828104
Sample Date	Client Info			13 May 2024	04 Mar 2024	19 Oct 2023
Machine Age	mls	Client Info		129658	124448	114370
Oil Age	mls	Client Info		0	0	0
Oil Changed	Client Info			Not Changed	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	19	12	14
Chromium	ppm	ASTM D5185m	>20	<1	<1	0
Nickel	ppm	ASTM D5185m	>4	0	<1	<1
Titanium	ppm	ASTM D5185m		82	79	60
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	2	2	3
Lead	ppm	ASTM D5185m	>40	0	<1	<1
Copper	ppm	ASTM D5185m	>330	<1	<1	<1
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	1	<1
Cadmium	ppm	ASTM D5185m		0	<1	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	108	135	65
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	10	9	7
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	450	473	422	479
Calcium	ppm	ASTM D5185m	3000	1751	1691	1507
Phosphorus	ppm	ASTM D5185m	1150	1041	1025	996
Zinc	ppm	ASTM D5185m	1350	1234	1148	1164
Sulfur	ppm	ASTM D5185m	4250	4346	3802	3549

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	6	6	7
Sodium	ppm	ASTM D5185m	>158	2	1	2
Potassium	ppm	ASTM D5185m	>20	2	5	6


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	1.8	0.3	0.4
Nitration	Abs/cm	*ASTM D7624	>20	11.0	8.3	9.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.7	19.5	21.1

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.5	15.0	16.1
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	8.1	7.8	6.9




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

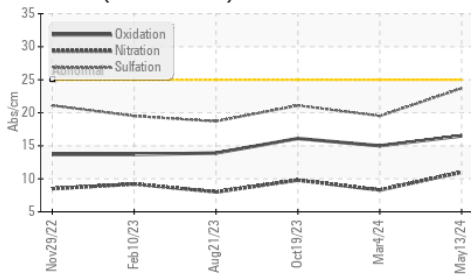

Base Number

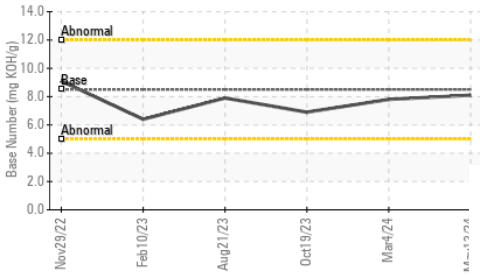

Viscosity @ 100°C

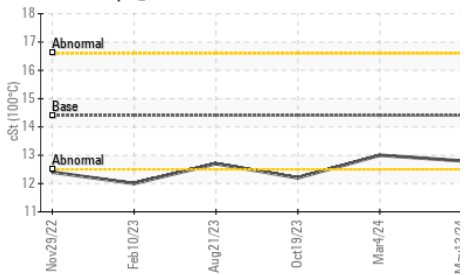


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	12.8	13.0

GRAPHS


Ferrous Alloys

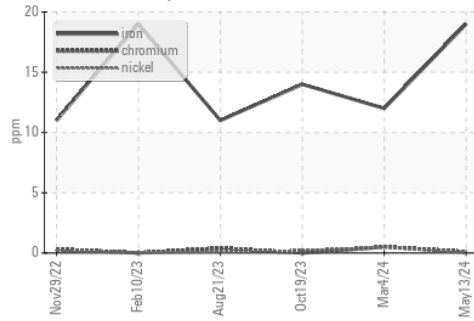


Non-ferrous Metals

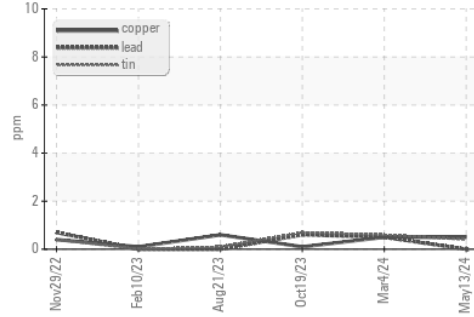

Viscosity @ 100°C

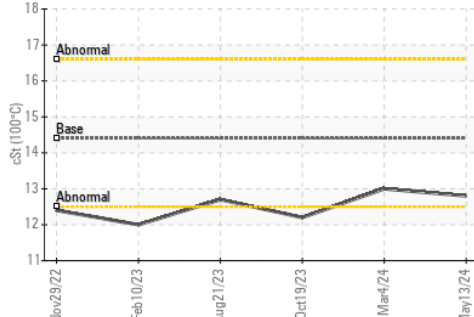

Base Number

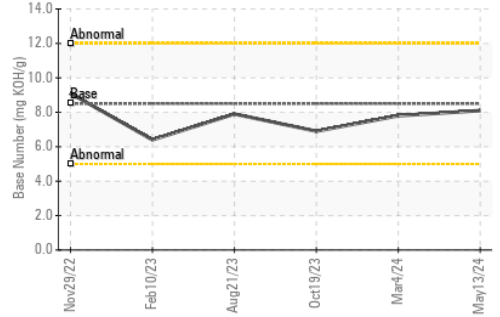

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0904724
Lab Number : 06183762
Unique Number : 11035088
Test Package : FLEET
Received : 17 May 2024
Tested : 21 May 2024
Diagnosed : 21 May 2024 - Wes Davis

CASWELL COUNTY SCHOOL BUS
 353 COUNTY HOME ROAD
 YANCEYVILLE, NC
 US 27379
 Contact: DEBRA MOORE
 debra.moore@caswell.k12.nc.us
 T: (336)694-4116
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)