

OIL ANALYSIS REPORT

Sample Rating Trend

Machine Id

CHICAGO PNEUMATIC ITJ150242 - PIONEER DAIRY

Screw Compressor

Fluid ISEL SERIES 2015-46 (2 GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

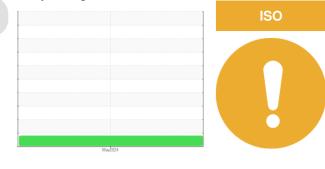

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		DFP0000018		
Sample Date		Client Info		16 May 2024		
Machine Age	hrs	Client Info		19880		
Oil Age	hrs	Client Info		2445		
Oil Changed		Client Info		Changed		
Sample Status				ATTENTION		
CONTAMINATION	۷	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>60	0		
Chromium	ppm	ASTM D5185m	>4	0		
Nickel	ppm	ASTM D5185m		0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>5	0		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>30	15		
Tin	ppm	ASTM D5185m	>15	2		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		1		
Phosphorus	ppm	ASTM D5185m		277		
Zinc	ppm	ASTM D5185m		54		
Sulfur	ppm	ASTM D5185m		255		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	4		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	0		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	7039		
Particles >6µm		ASTM D7647	>2500	<u> </u>		
Particles >14µm		ASTM D7647	>320	254		
Particles >21µm		ASTM D7647	>80	47		
Particles >38µm		ASTM D7647	>20	0		
Particles >71µm		ASTM D7647	>4	0		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	e 20/19/15		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.15		

Report Id: DFPSIO [WUSCAR] 06184293 (Generated: 05/22/2024 14:48:52) Rev: 1

Contact/Location: KEN HURST - DFPSIO Page 1 of 2



.10 (ju

8

61

41

2

0

Ê¹⁰

 of particles (1) 8

6k Δ

0

0.16

0.14 (BHO) 12 ₩ B0.10 0.08 Ë 0.06

명 0.04

0.02 0.00

56

54

52

() 50 0€ 48

·중 46


44

42

40

nber of particles (1

OIL ANALYSIS REPORT

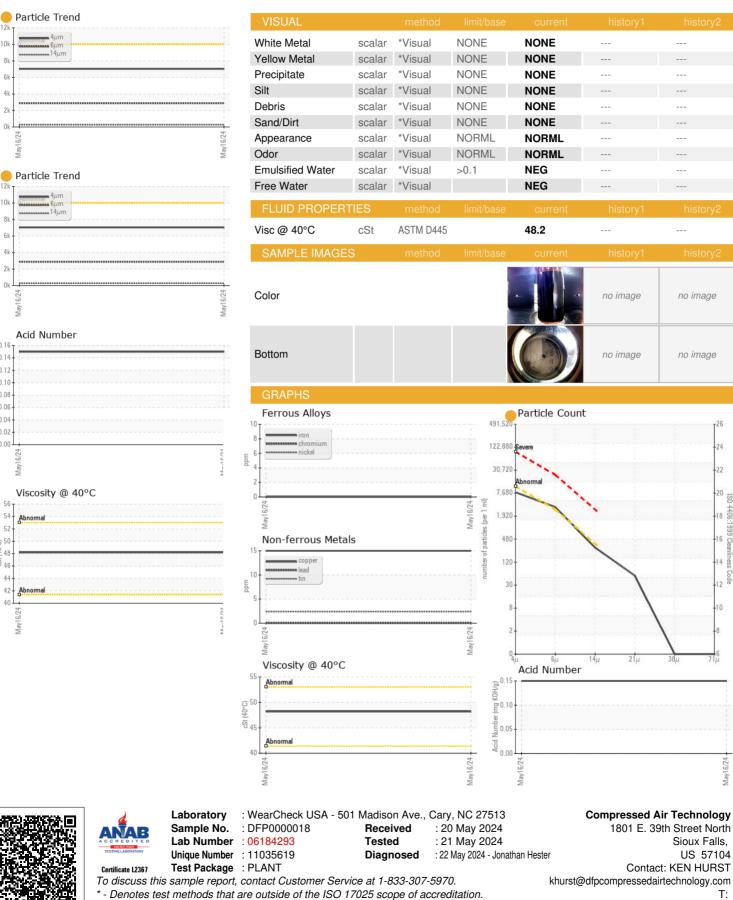

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: DFPSIO [WUSCAR] 06184293 (Generated: 05/22/2024 14:48:52) Rev: 1

Contact/Location: KEN HURST - DFPSIO

21µ

Sioux Falls,

Contact: KEN HURST

F: (605)332-0988

US 57104

no image

no imade

4406

:1999 Cle

14

Uzv.

T:

Page 2 of 2