


OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

7265954 (S/N 1059)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

Wear

All component wear rates are normal.

Contamination

Moderate concentration of visible dirt/debris present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC129477	KC112059	KC80921
Sample Date		Client Info		13 May 2024	04 May 2023	08 Sep 2022
Machine Age	hrs	Client Info		17666	15092	13217
Oil Age	hrs	Client Info		2574	3656	1781
Oil Changed		Client Info		Not Changd	Changed	Not Changd
Sample Status				ABNORMAL	ATTENTION	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	<1	3
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	2	3
Lead	ppm	ASTM D5185m	>10	1	0	0
Copper	ppm	ASTM D5185m	>50	6	6	5
Tin	ppm	ASTM D5185m	>10	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m	90	28	10	23
Calcium	ppm	ASTM D5185m	2	0	0	0
Phosphorus	ppm	ASTM D5185m		1	0	<1
Zinc	ppm	ASTM D5185m		33	9	24
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	1	0	0
Sodium	ppm	ASTM D5185m		14	11	11
Potassium	ppm	ASTM D5185m	>20	6	4	9
Water	%	ASTM D6304	>0.05	0.010	0.015	0.017
ppm Water	ppm	ASTM D6304	>500	101	156.7	174.6
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647			5630	47464
Particles >6µm		ASTM D7647	>1300		1508	▲ 13290
Particles >14µm		ASTM D7647	>80		78	▲ 762
Particles >21µm		ASTM D7647	>20		18	<u> 111</u>
Particles >38µm		ASTM D7647	>4		0	<u>^</u> 6
Particles >71µm		ASTM D7647	>3		0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13		20/18/13	△ 23/21/17
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
A : 1 N 1 (ANI)	1/011/	1071100015	0.4		0.40	0.0=

Acid Number (AN)

mg KOH/g ASTM D8045 0.4


0.43


0.43


0.37




OIL ANALYSIS REPORT








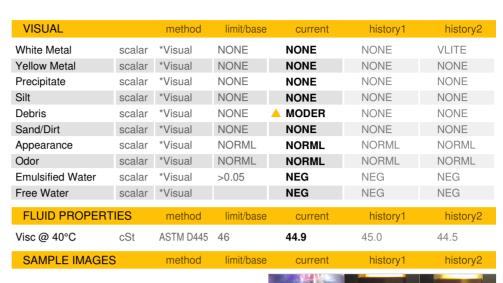



GRAPHS


Color

Bottom













Certificate 12367

Report Id: NEWALS [WUSCAR] 06184311 (Generated: 05/22/2024 17:20:32) Rev: 1

Laboratory Sample No.

Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : KC129477 Lab Number : 06184311 Unique Number : 11035637

Received : 20 May 2024 Tested

: 22 May 2024 Diagnosed : 22 May 2024 - Don Baldridge

NEW PROCESS STEEL CORP

5671 S 118TH ST ALSIP, IL US 60803

Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: Service Manager - NEWALS

T:

F: