




OIL ANALYSIS REPORT

Sample Rating Trend

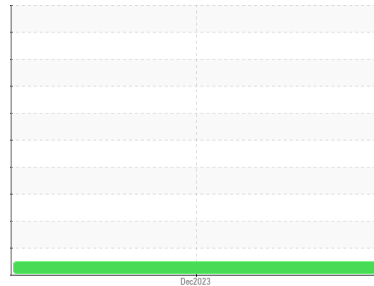

NORMAL



Area
SW
 Machine Id
SW 300R AGITATOR
 Component
Gearbox
 Fluid
GEAR OIL ISO 150 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0884850	---	---
Sample Date	Client Info			03 Dec 2023	---	---
Machine Age	yrs	Client Info		0	---	---
Oil Age	yrs	Client Info		0	---	---
Oil Changed	Client Info			N/A	---	---
Sample Status				NORMAL	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	NEG	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	48	---	---
Chromium	ppm	ASTM D5185m	>15	<1	---	---
Nickel	ppm	ASTM D5185m	>15	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>25	2	---	---
Lead	ppm	ASTM D5185m	>100	<1	---	---
Copper	ppm	ASTM D5185m	>200	<1	---	---
Tin	ppm	ASTM D5185m	>25	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
Cadmium	ppm	ASTM D5185m		<1	---	---



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	50	0	---	---
Barium	ppm	ASTM D5185m	15	<1	---	---
Molybdenum	ppm	ASTM D5185m	15	<1	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	50	<1	---	---
Calcium	ppm	ASTM D5185m	50	15	---	---
Phosphorus	ppm	ASTM D5185m	350	220	---	---
Zinc	ppm	ASTM D5185m	100	23	---	---
Sulfur	ppm	ASTM D5185m	12500	8775	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	3	---	---
Sodium	ppm	ASTM D5185m		2	---	---
Potassium	ppm	ASTM D5185m	>20	6	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.85	0.21	---	---



OIL ANALYSIS REPORT

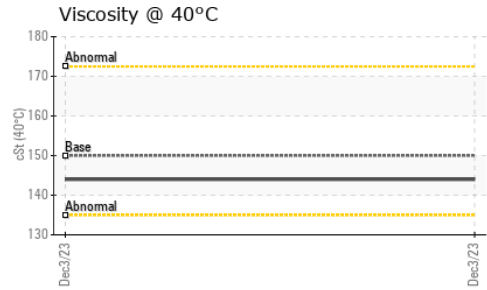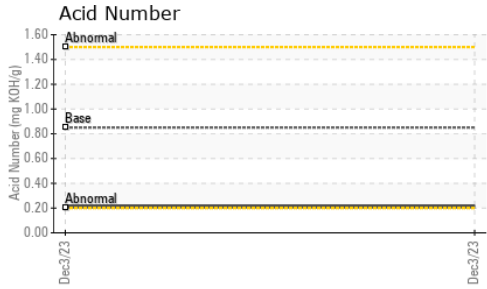





PROPERTY	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

PROPERTY	method	limit/base	current	history1	history2
FLUID PROPERTIES					
Visc @ 40°C	cSt	ASTM D445	150	144	---

PROPERTY	method	limit/base	current	history1	history2
----------	--------	------------	---------	----------	----------

PROPERTY	method	limit/base	current	history1	history2
SAMPLE IMAGES					
Color				no image	no image
Bottom				no image	no image

GRAPHS

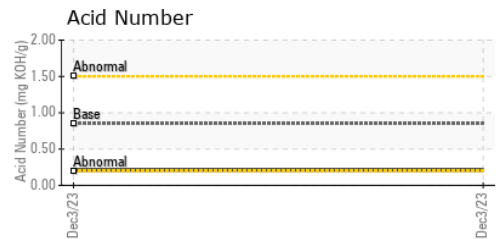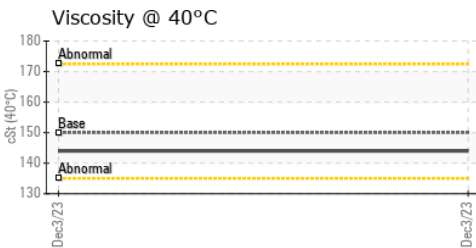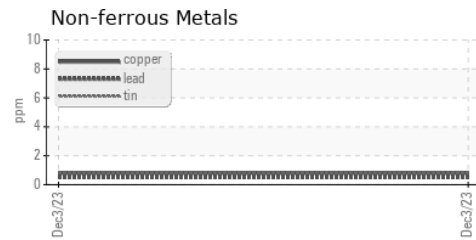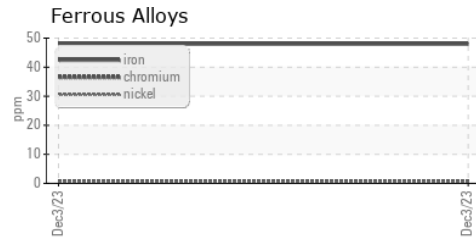

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0884850
Lab Number : 06184507
Unique Number : 11035833
Test Package : IND 2

Received : 20 May 2024
Tested : 21 May 2024
Diagnosed : 22 May 2024 - Jonathan Hester

SOLVAY SPARTANBURG
 399 SIMS CHAPEL RD
 SPARTANBURG, SC
 US 29306

Contact: GREG BLACK
 gregory.black@syensqo.com

T: (864)594-3270

F: (864)573-6972

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)