

## **OIL ANALYSIS REPORT**

Sample Rating Trend



### Area WHEY Machine for R005PP03BB01

Bearing Fluid MOBIL SHC 626 (--- GAL)

#### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.


#### Fluid Condition

The condition of the oil is acceptable for the time in service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2		
Sample Number		Client Info		WC0927393	WC0874185	WC0805904		
Sample Date		Client Info		03 May 2024	01 Dec 2023	21 Apr 2023		
Machine Age	mths	Client Info		0	0	0		
Oil Age	mths	Client Info		0	0	0		
Oil Changed		Client Info		N/A	N/A	N/A		
Sample Status				NORMAL	ATTENTION	NORMAL		
CONTAMINATION	۷	method	limit/base	current	history1	history2		
Water		WC Method	>2	NEG	NEG	NEG		
WEAR METALS		method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>20	1	0	1		
Chromium	ppm	ASTM D5185m	>20	<1	<1	0		
Nickel	ppm	ASTM D5185m	>20	<1	0	0		
Titanium	ppm	ASTM D5185m		<1	0	0		
Silver	ppm	ASTM D5185m		<1	0	0		
Aluminum	ppm	ASTM D5185m	>20	2	0	0		
Lead	ppm	ASTM D5185m	>20	<1	0	0		
Copper	ppm	ASTM D5185m		1	0	<1		
Tin	ppm	ASTM D5185m	>20	<1	0	0		
Vanadium	ppm	ASTM D5185m		<1	0	0		
Cadmium	ppm	ASTM D5185m		<1	0	0		
ADDITIVES		method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m		0	0	0		
Barium	ppm	ASTM D5185m		0	0	0		
Molybdenum	ppm	ASTM D5185m		<1	0	0		
Manganese	ppm	ASTM D5185m		<1	<1	<1		
Magnesium	ppm	ASTM D5185m		<1	0	0		
Calcium	ppm	ASTM D5185m		4	1	0		
Phosphorus	ppm	ASTM D5185m		423	446	440		
Zinc	ppm	ASTM D5185m		1	0	<1		
Sulfur	ppm	ASTM D5185m		28	151	191		
CONTAMINANTS		method	limit/base	current	history1	history2		
Silicon		ASTM D5185m	>15	<1	0	0		
Sodium	ppm	ASTM D5185m	>15	0	0	<1		
Potassium	ppm ppm		>20	1	0	0		
VISUAL	ppm	method	limit/base	current	history1	history2		
White Metal	scalar	*Visual	NONE	NONE	NONE	MODER		
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML	NORML	NORML		
Emulsified Water	scalar	*Visual	>2	NEG	NEG	NEG		
			>_	NEG	NEG			
Free Water 4:17:00) Rev: 1	scalar	*Visual				NEG L VILLASENOR		
:17:00) Rev: 1 Submitted By: MICHAEL VILLASENOR								




# **OIL ANALYSIS REPORT**

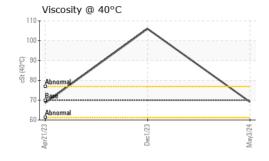

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	69.9	69.1	106	68.6
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color				•		
Bottom						

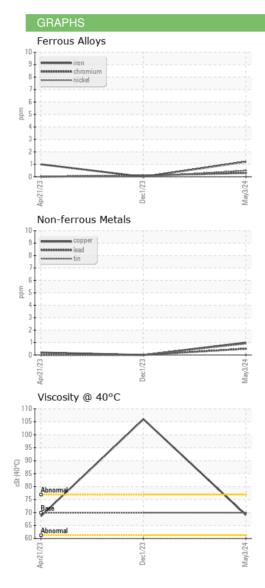

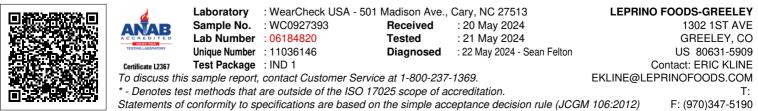

Report Id: LEPGRE [WUSCAR] 06184820 (Generated: 05/22/2024 14:17:00) Rev: 1

Submitted By: MICHAEL VILLASENOR

Page 2 of 2