




OIL ANALYSIS REPORT



Area
OKLAHOMA/102/EG - SKID STEER
 Machine Id
53.148L [OKLAHOMA^102^EG - SKID STEER]
 Component
Hydraulic System
 Fluid
MOBIL MOBILTRANS AST 30 (--- GAL)

Sample Rating Trend

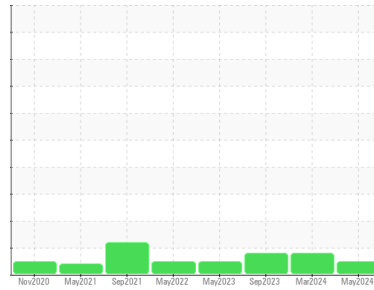

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system is acceptable. There is no indication of any contamination in the component.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0914405	WC0908730	WC0834047
Sample Date	Client Info		12 May 2024	11 Mar 2024	27 Sep 2023
Machine Age	hrs	Client Info	4003	3590	2992
Oil Age	hrs	Client Info	2992	2992	2992
Oil Changed	Client Info		N/A	N/A	Changed
Sample Status			NORMAL	ATTENTION	ATTENTION

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>20	26	25	30
Chromium	ppm	ASTM D5185m	>10	0	0	<1
Nickel	ppm	ASTM D5185m	>10	0	0	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>10	4	4	4
Lead	ppm	ASTM D5185m	>10	2	2	2
Copper	ppm	ASTM D5185m	>75	16	15	16
Tin	ppm	ASTM D5185m	>10	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		30	27	16
Barium	ppm	ASTM D5185m		0	<1	0
Molybdenum	ppm	ASTM D5185m		<1	<1	<1
Manganese	ppm	ASTM D5185m		1	<1	<1
Magnesium	ppm	ASTM D5185m		14	9	12
Calcium	ppm	ASTM D5185m		1799	1747	1497
Phosphorus	ppm	ASTM D5185m		878	781	833
Zinc	ppm	ASTM D5185m		1063	911	1053
Sulfur	ppm	ASTM D5185m		3715	3223	3248

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>20	8	7	7
Sodium	ppm	ASTM D5185m		3	4	<1
Potassium	ppm	ASTM D5185m	>20	2	1	3

FLUID CLEANLINESS





	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		6225	40711	70982
Particles >6µm	ASTM D7647	>2500	687	3881	4259
Particles >14µm	ASTM D7647	>640	65	105	24
Particles >21µm	ASTM D7647	>160	11	22	5
Particles >38µm	ASTM D7647	>40	0	0	1
Particles >71µm	ASTM D7647	>10	0	0	0
Oil Cleanliness	ISO 4406 (c)	>--/18/16	20/17/13	23/19/14	23/19/12

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.71	0.74	0.82




OIL ANALYSIS REPORT

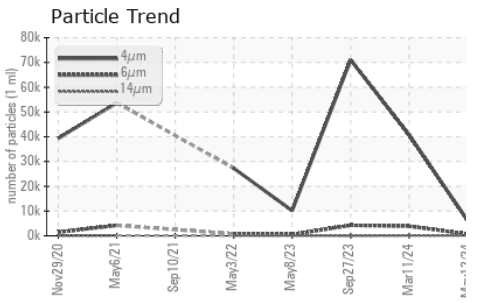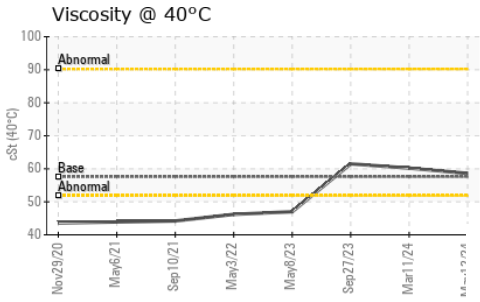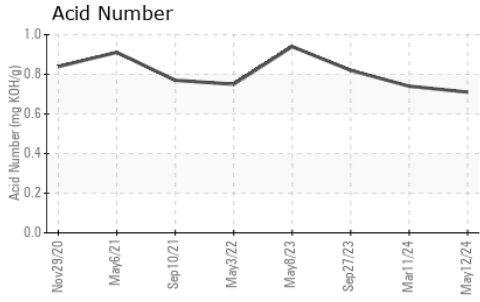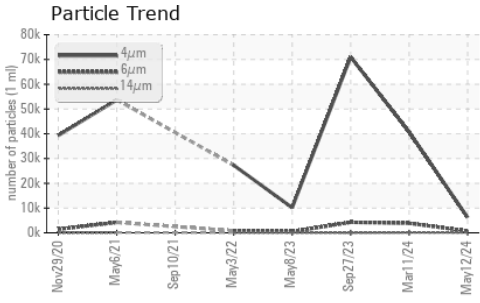





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	57.6	60.2	61.5

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

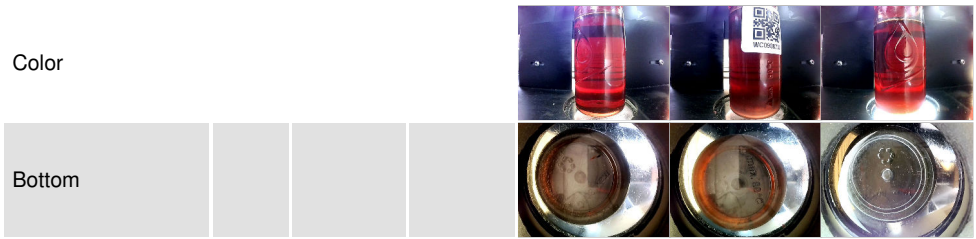

GRAPHS

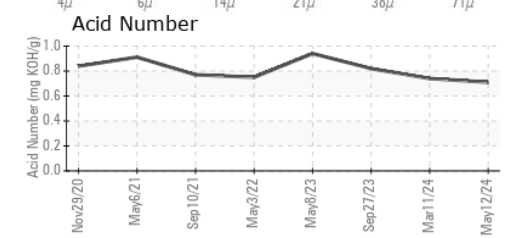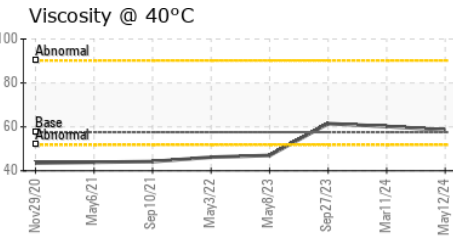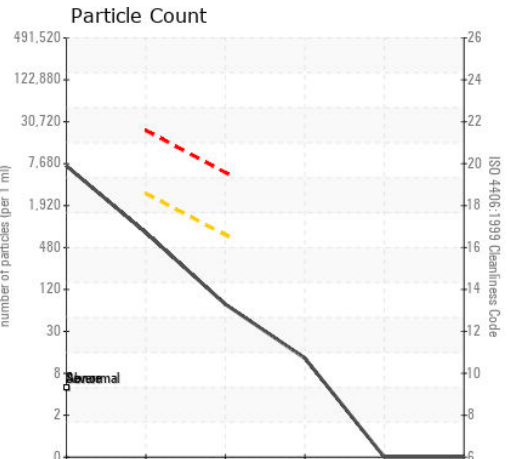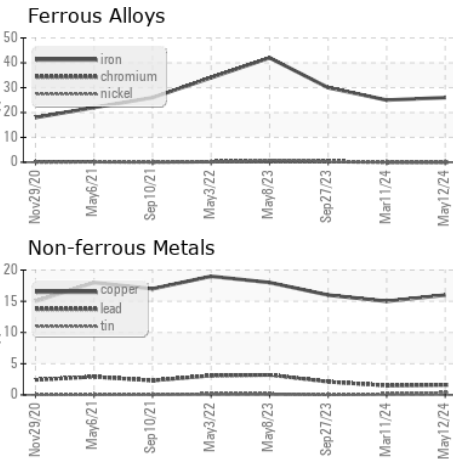

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0914405 **Received** : 20 May 2024
Lab Number : 06184916 **Tested** : 22 May 2024
Unique Number : 11036242 **Diagnosed** : 22 May 2024 - Don Baldrige
Test Package : CONST

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS 67213
 Contact: JASON ANDERSON
 jason.anderson@sherwood.net
 T: (918)609-8800
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)