




OIL ANALYSIS REPORT



Area
OKLAHOMA/3/EG - LOADER
 Machine Id
50.25L [OKLAHOMA^3^EG - LOADER]
 Component
Hydraulic System
 Fluid
MOBIL MOBILTRANS AST 30 (--- GAL)

Sample Rating Trend

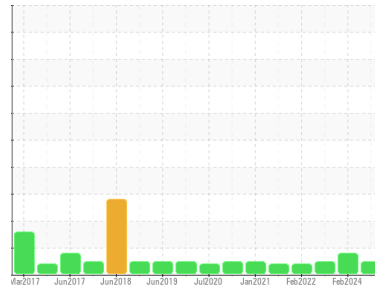

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

Confirm oil type. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0935138	WC0887016	WC0746326
Sample Date	Client Info		12 May 2024	02 Feb 2024	27 Oct 2022
Machine Age	hrs	Client Info	1412	785	21310
Oil Age	hrs	Client Info	1412	293	1866
Oil Changed	Client Info		N/A	N/A	Changed
Sample Status			NORMAL	ABNORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	8	8	10
Chromium	ppm	ASTM D5185m >10	1	3	6
Nickel	ppm	ASTM D5185m >10	0	<1	0
Titanium	ppm	ASTM D5185m	0	<1	<1
Silver	ppm	ASTM D5185m	0	<1	<1
Aluminum	ppm	ASTM D5185m >10	<1	<1	6
Lead	ppm	ASTM D5185m >10	0	<1	<1
Copper	ppm	ASTM D5185m >75	8	6	2
Tin	ppm	ASTM D5185m >10	<1	<1	<1
Antimony	ppm	ASTM D5185m	---	---	---
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	<1	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	21	4	57
Barium	ppm	ASTM D5185m	0	5	0
Molybdenum	ppm	ASTM D5185m	0	1	1
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m	9	5	20
Calcium	ppm	ASTM D5185m	983	400	3204
Phosphorus	ppm	ASTM D5185m	826	658	1054
Zinc	ppm	ASTM D5185m	1032	925	1290
Sulfur	ppm	ASTM D5185m	2783	1900	5526


CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	4	3	14
Sodium	ppm	ASTM D5185m	3	0	1
Potassium	ppm	ASTM D5185m >20	<1	1	3


FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		865	18002	76889
Particles >6µm	ASTM D7647	>2500	211	▲ 6586	2184
Particles >14µm	ASTM D7647	>640	20	579	77
Particles >21µm	ASTM D7647	>160	6	145	12
Particles >38µm	ASTM D7647	>40	0	3	1
Particles >71µm	ASTM D7647	>10	0	0	0
Oil Cleanliness	ISO 4406 (c)	>--/18/16	17/15/11	▲ 21/20/16	23/18/13


Particle Trend

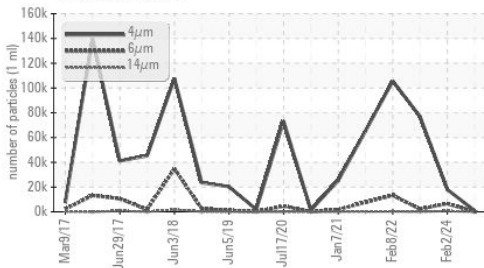


Acid Number

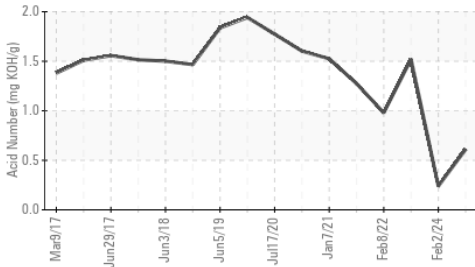

Viscosity @ 40°C

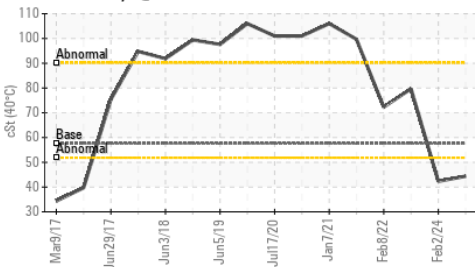

Particle Trend

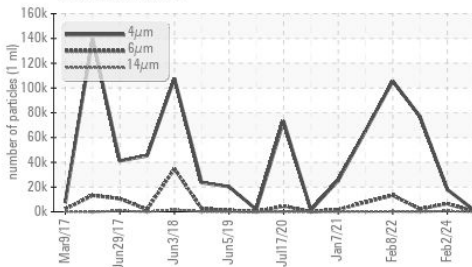

FLUID DEGRADATION method limit/base current history1 history2

Acid Number (AN)	mg KOH/g	ASTM D8045		0.61	0.24	1.52
------------------	----------	------------	--	-------------	------	------


VISUAL method limit/base current history1 history2

White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG


FLUID PROPERTIES method limit/base current history1 history2

Visc @ 40°C	cSt	ASTM D445	57.6	44.4	42.3	79.7
-------------	-----	-----------	------	-------------	------	------

SAMPLE IMAGES method limit/base current history1 history2

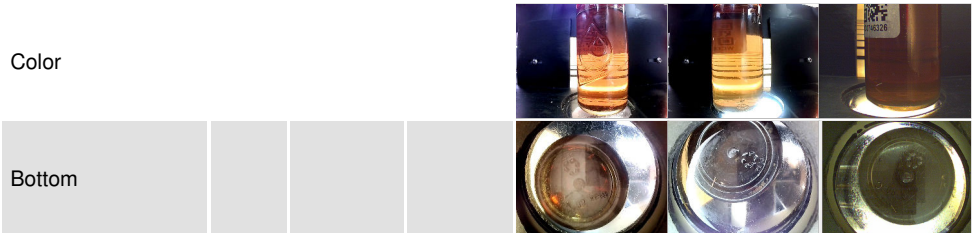

GRAPHS

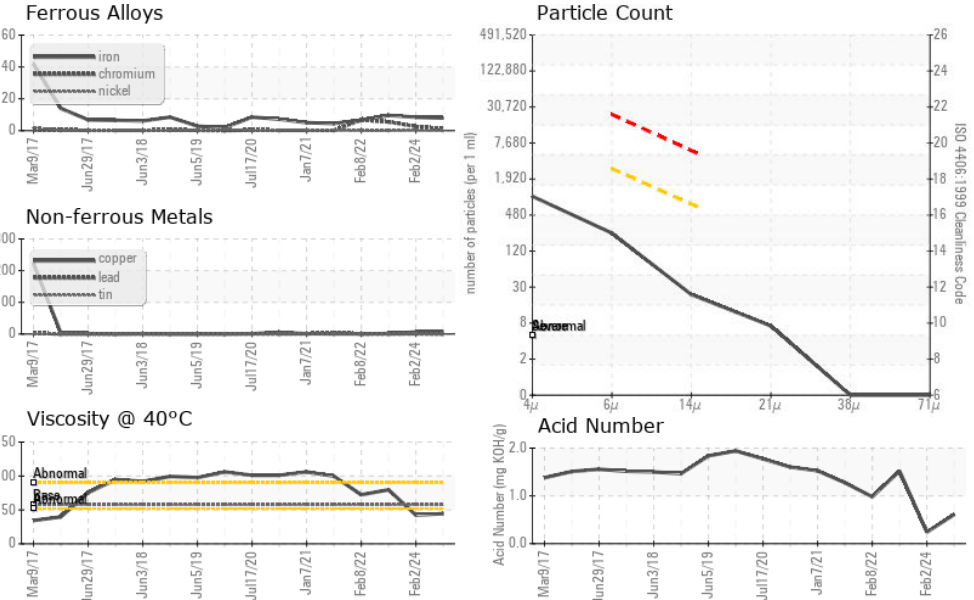

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0935138 **Received** : 20 May 2024
Lab Number : 06184917 **Tested** : 22 May 2024
Unique Number : 11036243 **Diagnosed** : 22 May 2024 - Don Baldrige
Test Package : CONST

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: DOUG KING
 doug.king@sherwood.net
 T: (316)617-3161
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)