




OIL ANALYSIS REPORT



Area
OKLAHOMA/3/EG - LOADER
 Machine Id
50.25L [OKLAHOMA^3^EG - LOADER]
 Component
Steering
 Fluid
MOBIL MOBILTRANS AST 30 (--- GAL)

Sample Rating Trend

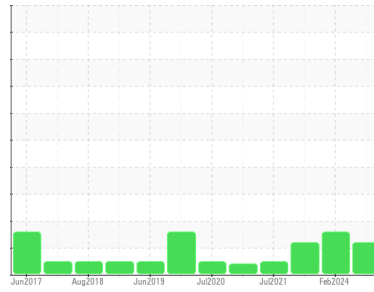

ISO



DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the fluid.

Fluid Condition

Confirm oil type. The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0935136	WC0887017	WC0662473
Sample Date	Client Info		12 May 2024	02 Feb 2024	08 Feb 2022
Machine Age	hrs	Client Info	1412	785	19444
Oil Age	hrs	Client Info	1412	2159	935
Oil Changed	Client Info		N/A	N/A	Changed
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >60	2	5	7
Chromium	ppm	ASTM D5185m >12	0	<1	<1
Nickel	ppm	ASTM D5185m >6	0	<1	<1
Titanium	ppm	ASTM D5185m	0	<1	<1
Silver	ppm	ASTM D5185m	0	<1	0
Aluminum	ppm	ASTM D5185m >4	<1	<1	2
Lead	ppm	ASTM D5185m >12	0	<1	0
Copper	ppm	ASTM D5185m >30	8	11	4
Tin	ppm	ASTM D5185m	<1	<1	0
Antimony	ppm	ASTM D5185m	---	---	<1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	<1	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	89	41	44
Barium	ppm	ASTM D5185m	0	5	0
Molybdenum	ppm	ASTM D5185m	<1	1	<1
Manganese	ppm	ASTM D5185m	<1	<1	0
Magnesium	ppm	ASTM D5185m	24	12	13
Calcium	ppm	ASTM D5185m	2752	1688	3267
Phosphorus	ppm	ASTM D5185m	1060	830	1073
Zinc	ppm	ASTM D5185m	1306	1087	1162
Sulfur	ppm	ASTM D5185m	4538	3286	4316





CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >10	7	5	9
Sodium	ppm	ASTM D5185m	2	0	4
Potassium	ppm	ASTM D5185m >20	0	1	2

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		6795	21880	61506
Particles >6µm	ASTM D7647	>640	▲ 1844	▲ 6943	▲ 14031
Particles >14µm	ASTM D7647	>80	▲ 94	▲ 378	▲ 397
Particles >21µm	ASTM D7647	>20	13	▲ 71	▲ 47
Particles >38µm	ASTM D7647	>4	0	2	0
Particles >71µm	ASTM D7647	>3	0	0	0
Oil Cleanliness	ISO 4406 (c)	>--/16/13	▲ 20/18/14	▲ 22/20/16	▲ 23/21/16

OIL ANALYSIS REPORT

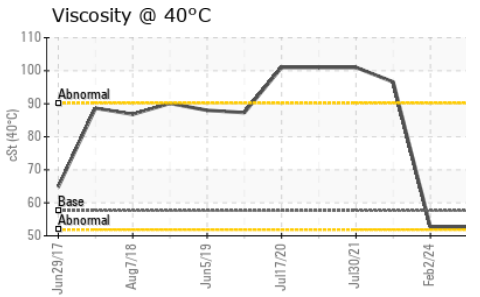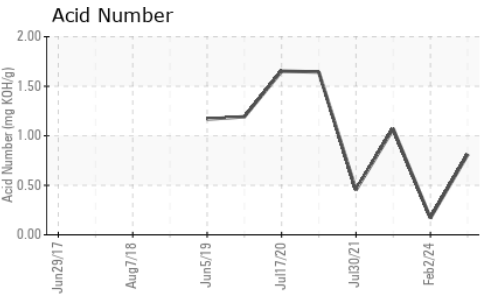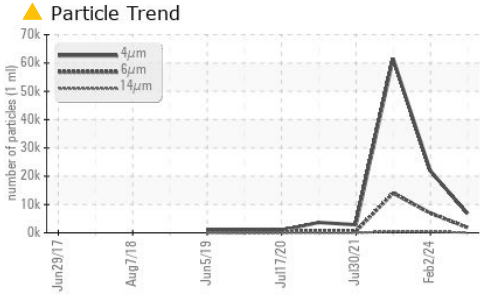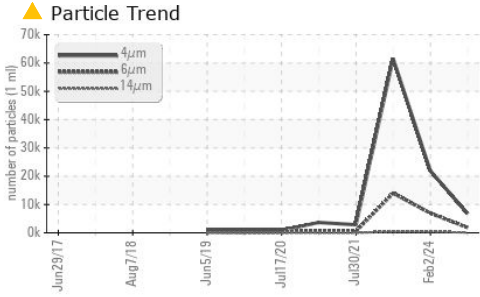


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.81	0.17	1.07




VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual		NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	57.6	52.6	52.7	96.6

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

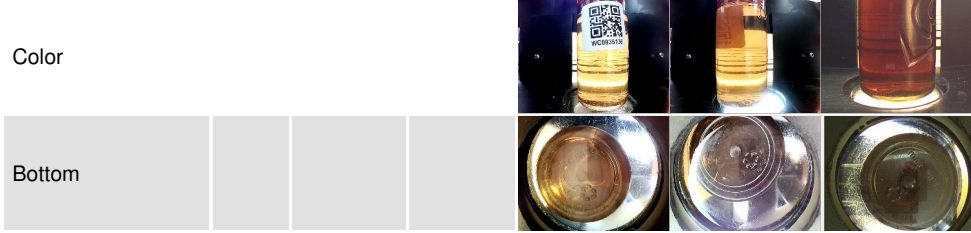

GRAPHS

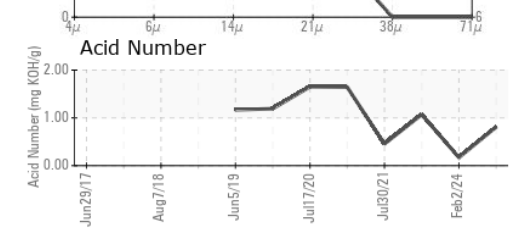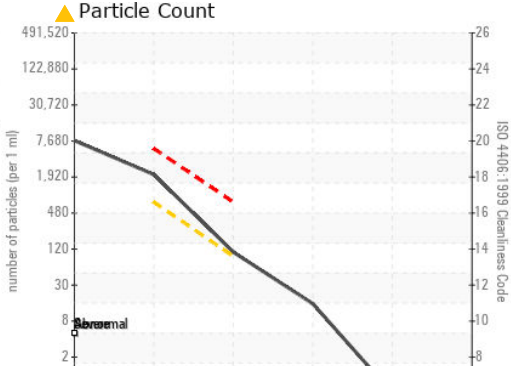

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0935136 **Received** : 20 May 2024
Lab Number : 06184919 **Tested** : 22 May 2024
Unique Number : 11036245 **Diagnosed** : 22 May 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PrtCount)

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: DOUG KING
 doug.king@sherwood.net
 T: (316)617-3161
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)