OIL ANALYSIS REPORT

Area
OKLAHOMA/102/EG - SKID STEER
Machine Id
53.180L [OKLAHOMA^102^EG - SKID STEER]
Component
Hydraulic System
Fluid
MOBIL MOBILTRANS AST 30 (--- GAL)

Sample Rating Trend

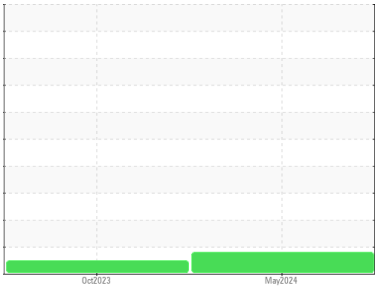

WEAR

DIAGNOSIS

Recommendation
No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear
The iron level is abnormal. All other metal levels are typical for a new component breaking in.

Contamination
The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**WC0935192**	WC0862641	---
Sample Date		Client Info		**12 May 2024**	23 Oct 2023	---
Machine Age	hrs	Client Info		**695**	4	---
Oil Age	hrs	Client Info		**527**	4	---
Oil Changed		Client Info		**N/A**	Not Changd	---
Sample Status				**ABNORMAL**	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water		WC Method	>0.1	**NEG**	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	▲ **33**	1	---
Chromium	ppm	ASTM D5185m	>10	**0**	<1	---
Nickel	ppm	ASTM D5185m	>10	**<1**	0	---
Titanium	ppm	ASTM D5185m		**0**	0	---
Silver	ppm	ASTM D5185m		**<1**	<1	---
Aluminum	ppm	ASTM D5185m	>10	**<1**	<1	---
Lead	ppm	ASTM D5185m	>10	**<1**	<1	---
Copper	ppm	ASTM D5185m	>75	**14**	11	---
Tin	ppm	ASTM D5185m	>10	**<1**	<1	---
Vanadium	ppm	ASTM D5185m		**0**	0	---
Cadmium	ppm	ASTM D5185m		**0**	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		**3**	0	---
Barium	ppm	ASTM D5185m		**0**	20	---
Molybdenum	ppm	ASTM D5185m		**0**	<1	---
Manganese	ppm	ASTM D5185m		**1**	<1	---
Magnesium	ppm	ASTM D5185m		**6**	3	---
Calcium	ppm	ASTM D5185m		**312**	148	---
Phosphorus	ppm	ASTM D5185m		**728**	702	---
Zinc	ppm	ASTM D5185m		**908**	849	---
Sulfur	ppm	ASTM D5185m		**2092**	2130	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	**2**	1	---
Sodium	ppm	ASTM D5185m		**2**	2	---
Potassium	ppm	ASTM D5185m	>20	**<1**	<1	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		**47883**	5951	---
Particles >6µm		ASTM D7647	>2500	**2339**	668	---
Particles >14µm		ASTM D7647	>640	**68**	10	---
Particles >21µm		ASTM D7647	>160	**11**	2	---
Particles >38µm		ASTM D7647	>40	**0**	0	---
Particles >71µm		ASTM D7647	>10	**0**	0	---
Oil Cleanliness		ISO 4406 (c)	>--/18/16	**23/18/13**	20/17/10	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		**0.71**	1.00	---

OIL ANALYSIS REPORT

Particle Trend

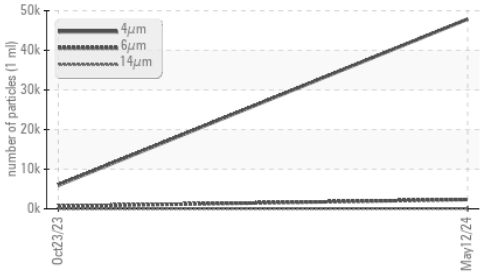

Particle Count

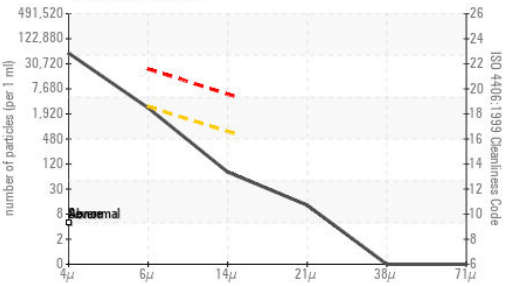

Acid Number

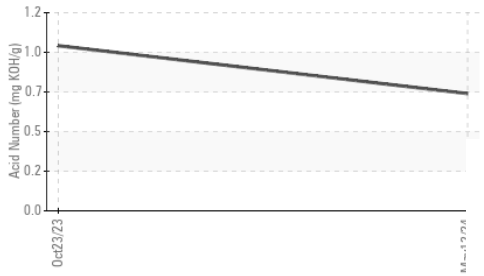

Particle Trend

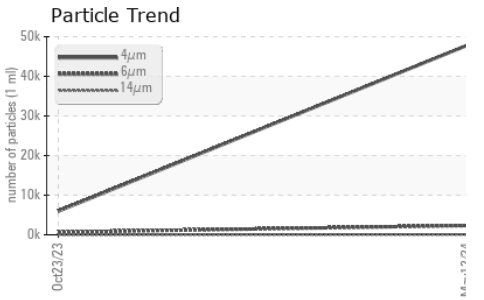

Viscosity @ 40°C

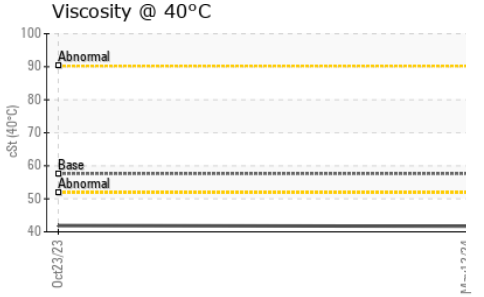

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	**NONE**	NONE	---
Yellow Metal	scalar	*Visual	NONE	**NONE**	NONE	---
Precipitate	scalar	*Visual	NONE	**NONE**	NONE	---
Silt	scalar	*Visual	NONE	**NONE**	NONE	---
Debris	scalar	*Visual	NONE	**NONE**	NONE	---
Sand/Dirt	scalar	*Visual	NONE	**NONE**	NONE	---
Appearance	scalar	*Visual	NORML	**NORML**	NORML	---
Odor	scalar	*Visual	NORML	**NORML**	NORML	---
Emulsified Water	scalar	*Visual	>0.1	**NEG**	NEG	---
Free Water	scalar	*Visual		**NEG**	NEG	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	57.6	**41.7**	41.9	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					*no image*
Bottom					*no image*

GRAPHS

Ferrous Alloys

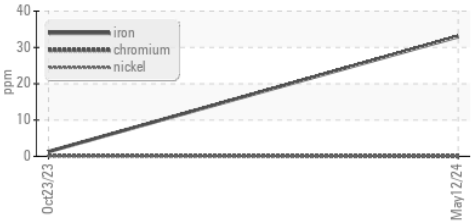

Non-ferrous Metals

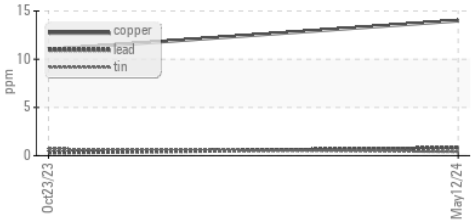

Viscosity @ 40°C

Particle Count

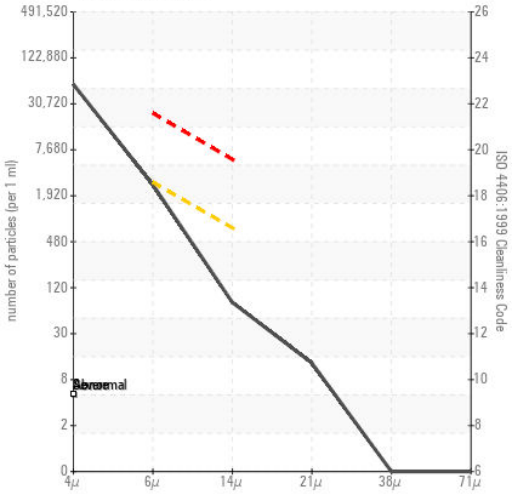

Acid Number

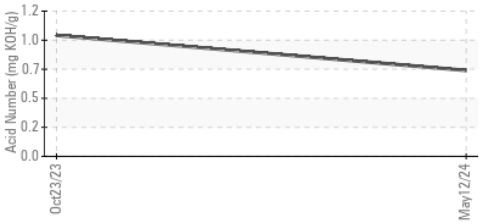

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0935192
Lab Number : 06184920
Unique Number : 11036246
Test Package : CONST

Received : 20 May 2024
Tested : 22 May 2024
Diagnosed : 22 May 2024 - Don Baldridge

To discuss this sample report, contact Customer Service at 1-800-237-1369.
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

SHERWOOD CONSTRUCTION CO INC
3219 WEST MAY ST
WICHITA, KS
US 67213
Contact: BILL ORCUTT
william.orcutt@wildcat.net
T:
F:

Report Id: SHEWIC [WUSCAR] 06184920 (Generated: 05/22/2024 15:26:21) Rev: 1

Submitted By: GARRETT ADAMS