




# OIL ANALYSIS REPORT

Sample Rating Trend

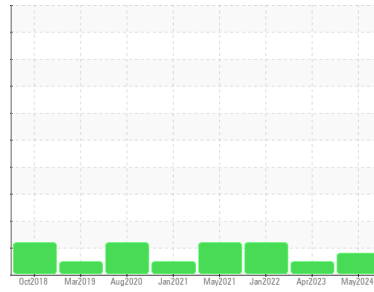

ISO



Area  
**KANSAS/44/EG - TRUCK-OFF-HWY-HEAVY HAUL**  
 Machine Id  
**69.99L [KANSAS^44^EG - TRUCK-OFF-HWY-HEAVY HAUL]**  
 Component  
**Steering**  
 Fluid  
**MOBIL MOBILTRANS AST 30 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the fluid.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0935109</b>	WC0673508	WC0634287
Sample Date	Client Info		<b>03 May 2024</b>	24 Apr 2023	28 Jan 2022
Machine Age	hrs	Client Info	<b>8165</b>	7760	6905
Oil Age	hrs	Client Info	<b>405</b>	5951	500
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	Not Chngd
Sample Status			<b>ABNORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >60	<b>7</b>	3	3
Chromium	ppm	ASTM D5185m >12	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m >6	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >4	<b>2</b>	0	2
Lead	ppm	ASTM D5185m >12	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m >30	<b>2</b>	<1	<1
Tin	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>31</b>	28	34
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>18</b>	13	14
Calcium	ppm	ASTM D5185m	<b>3016</b>	3165	3283
Phosphorus	ppm	ASTM D5185m	<b>1007</b>	1015	1049
Zinc	ppm	ASTM D5185m	<b>1236</b>	1246	1275
Sulfur	ppm	ASTM D5185m	<b>5178</b>	4532	4417

## CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >10	<b>10</b>	6	6
Sodium	ppm	ASTM D5185m	<b>4</b>	0	2
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	2	0

## FLUID CLEANLINESS


	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>54540</b>	444	18344
Particles >6µm	ASTM D7647	>640	<b>▲ 2321</b>	68	▲ 4196
Particles >14µm	ASTM D7647	>80	<b>51</b>	11	▲ 172
Particles >21µm	ASTM D7647	>20	<b>10</b>	4	▲ 41
Particles >38µm	ASTM D7647	>4	<b>0</b>	1	2
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>--/16/13	<b>▲ 23/18/13</b>	16/13/11	▲ 21/19/15

# OIL ANALYSIS REPORT


▲ Particle Trend

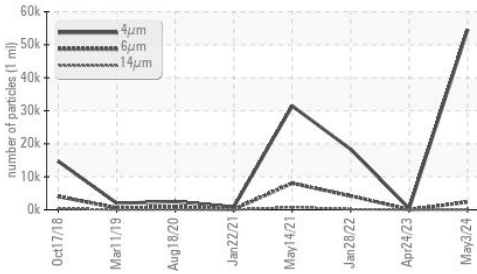


▲ Particle Trend

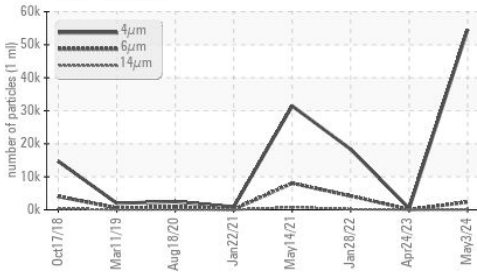

Acid Number

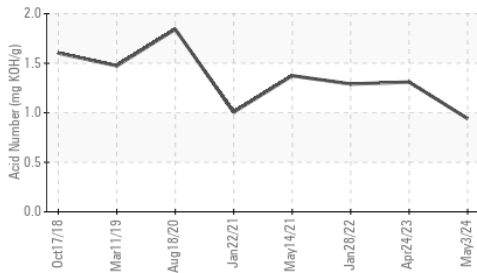

Viscosity @ 40°C

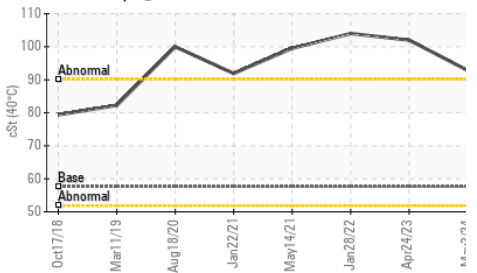


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.94</b>	1.31	1.29

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual		<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	57.6	<b>92.8</b>	102	104

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

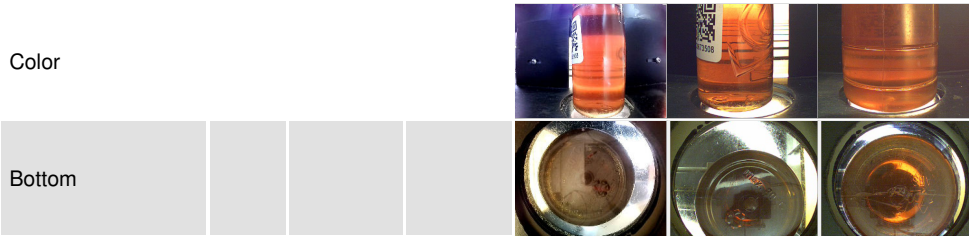


## GRAPHS


Ferrous Alloys

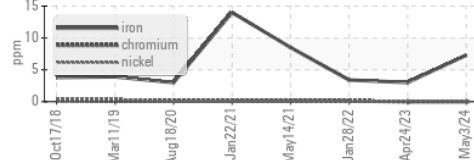


Non-ferrous Metals

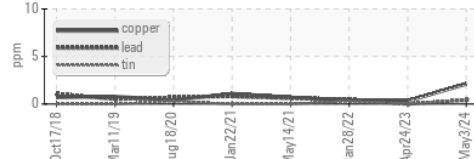


Viscosity @ 40°C

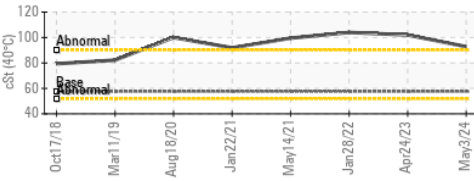

▲ Particle Count

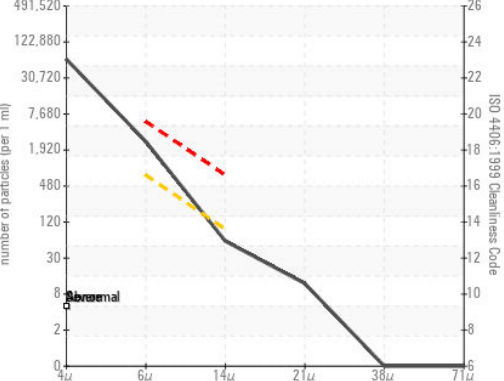

Acid Number

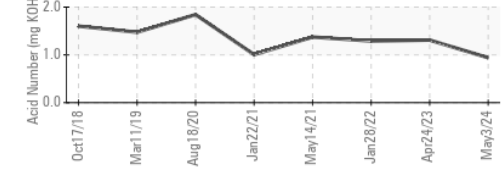

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0935109 **Received** : 20 May 2024  
**Lab Number** : 06184921 **Tested** : 22 May 2024  
**Unique Number** : 11036247 **Diagnosed** : 22 May 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: PrtCount )

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: DOUG KING  
 doug.king@sherwood.net  
 T: (316)617-3161  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)