

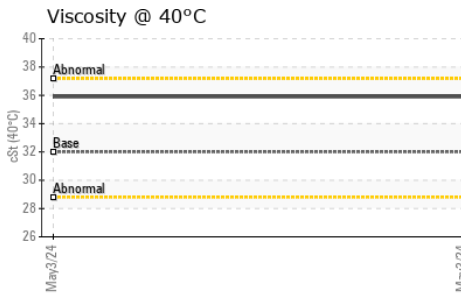
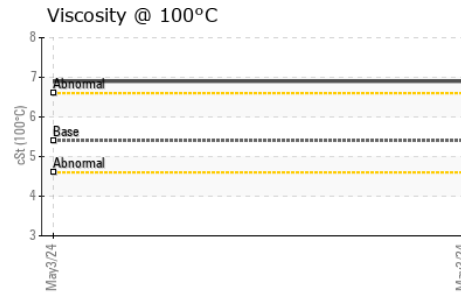


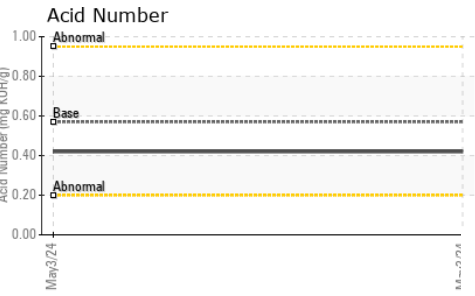

OIL ANALYSIS REPORT




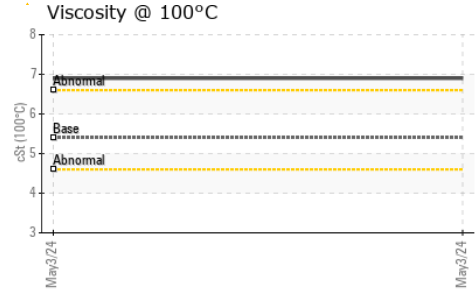


VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	32	35.9	---	---
Visc @ 100°C	cSt	ASTM D445	5.4	6.9	---	---
Viscosity Index (VI)	Scale	ASTM D2270	102	155	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

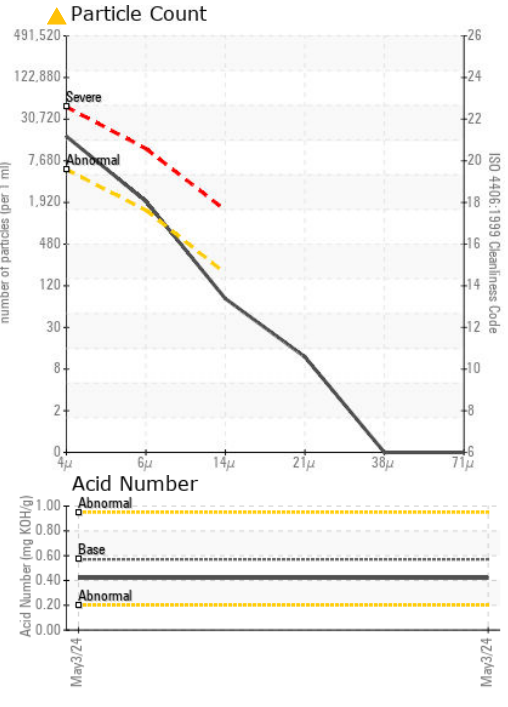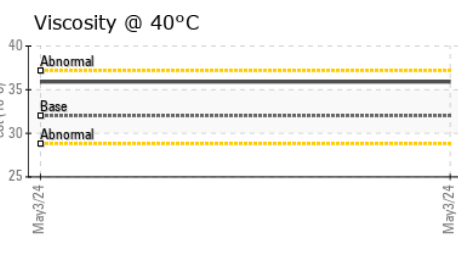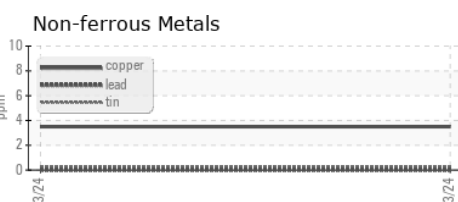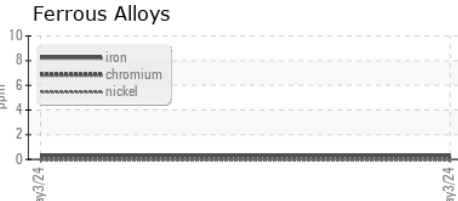

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0803599 **Received** : 20 May 2024
Lab Number : 06184960 **Tested** : 22 May 2024
Unique Number : 11036286 **Diagnosed** : 22 May 2024 - Don Baldrige
Test Package : MOB 2 (Additional Tests: KV100, VI)

HIAB USA - MINNEAPOLIS
 10974 CLARK RD
 INVER GROVE HEIGHTS, MN
 US 55077
 Contact: MAT ENGLER
 MAT.ENGLER@HIAB.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)