


# **OIL ANALYSIS REPORT**

Sample Rating Trend

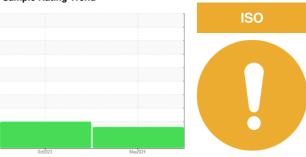

Machine Id

## **KAESER 7120550**

Component Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

## Contamination

There is a moderate amount of particulates present in the oil.

### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			0ct2023	May2024		
OAMBLE INFORM	AATION		11 11 11			
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA012364	KCPA003510	
Sample Date		Client Info		07 May 2024	30 Oct 2023	
Machine Age	hrs	Client Info		26321	21965	
Oil Age	hrs	Client Info		4356	0	
Oil Changed		Client Info		Changed	N/A	
Sample Status				ATTENTION	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	
Chromium	ppm	ASTM D5185m	>10	0	<1	
Nickel	ppm	ASTM D5185m	>3	0	0	
Titanium	ppm	ASTM D5185m	>3	0	0	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum	ppm	ASTM D5185m	>10	<1	2	
Lead	ppm	ASTM D5185m	>10	0	0	
Copper	ppm	ASTM D5185m	>50	3	4	
Tin	ppm	ASTM D5185m	>10	<1	0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	
Barium	ppm	ASTM D5185m	90	73	<1	
Molybdenum	ppm	ASTM D5185m	0	0	0	
Manganese	ppm	ASTM D5185m		<1	0	
Magnesium	ppm	ASTM D5185m	100	77	3	
Calcium	ppm	ASTM D5185m	0	<1	5	
Phosphorus	ppm	ASTM D5185m	0	0	0	
Zinc	ppm	ASTM D5185m	0	0	0	
Sulfur	ppm	ASTM D5185m	23500	23522	21154	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	
Sodium	ppm	ASTM D5185m		27	0	
Potassium	ppm	ASTM D5185m	>20	5	2	
Water	%	ASTM D6304	>0.05	0.017	0.011	
ppm Water	ppm	ASTM D6304	>500	179	111.3	
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		7188	23498	
Particles >6µm		ASTM D7647	>1300	<u> </u>	<b>△</b> 6242	
Particles >14μm		ASTM D7647	>80	96	<b>▲</b> 578	
Particles >21µm		ASTM D7647	>20	<b>25</b>	<u></u> 164	
Particles >38μm		ASTM D7647	>4	1	<b>6</b>	
Particles >71μm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>20/18/14</b>	<b>22/20/16</b>	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Asid Number (ANI)	m = 1/OLI/=	ACTM DODAE	1.0	0.40	0.40	

Acid Number (AN)


mg KOH/g ASTM D8045 1.0

0.48

0.49



## **OIL ANALYSIS REPORT**

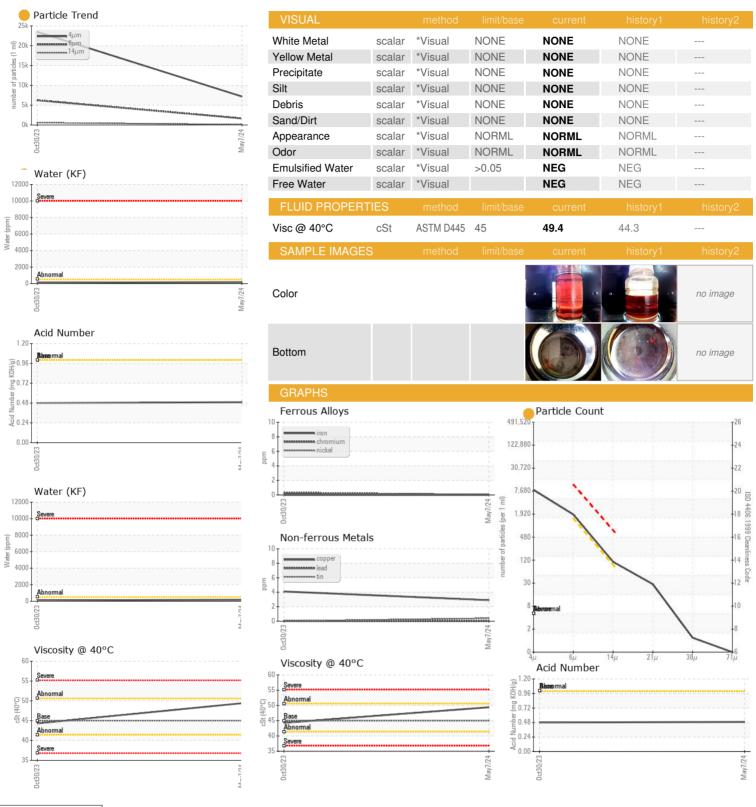



Certificate 12367

Laboratory Sample No.

Lab Number : 06185035

: KCPA012364 Unique Number : 11036361

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 20 May 2024 **Tested** Diagnosed

: 22 May 2024 : 22 May 2024 - Jonathan Hester

**POMPS TIRES** 4500 E 51ST AVE DENVER, CO US 80216 Contact: Service Manager

Test Package : IND 2 ( Additional Tests: KF, PrtCount ) To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: