




OIL ANALYSIS REPORT

Sample Rating Trend

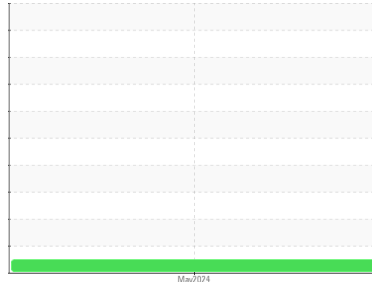

NORMAL



Machine Id
76E-1B

Component
Gearbox

Fluid
HIGH PERFORMANCE LUBRICANTS GEAR LIFE 150 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|----------|----------|
| Sample Number | Client Info | | | HPL0004781 | --- | --- |
| Sample Date | Client Info | | | 15 May 2024 | --- | --- |
| Machine Age | hrs | Client Info | | 0 | --- | --- |
| Oil Age | hrs | Client Info | | 0 | --- | --- |
| Oil Changed | Client Info | | | N/A | --- | --- |
| Sample Status | | | | NORMAL | --- | --- |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---------------|-----------|--------|------------|------------|----------|----------|
| Water | WC Method | | >0.2 | NEG | --- | --- |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m | >200 | 59 | --- | --- |
| Chromium | ppm | ASTM D5185m | >15 | <1 | --- | --- |
| Nickel | ppm | ASTM D5185m | >15 | 0 | --- | --- |
| Titanium | ppm | ASTM D5185m | | <1 | --- | --- |
| Silver | ppm | ASTM D5185m | | <1 | --- | --- |
| Aluminum | ppm | ASTM D5185m | >25 | 1 | --- | --- |
| Lead | ppm | ASTM D5185m | >100 | 2 | --- | --- |
| Copper | ppm | ASTM D5185m | >200 | <1 | --- | --- |
| Tin | ppm | ASTM D5185m | >25 | <1 | --- | --- |
| Vanadium | ppm | ASTM D5185m | | <1 | --- | --- |
| Cadmium | ppm | ASTM D5185m | | 0 | --- | --- |


| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m | | 0 | --- | --- |
| Barium | ppm | ASTM D5185m | | 0 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | | 0 | --- | --- |
| Manganese | ppm | ASTM D5185m | | 2 | --- | --- |
| Magnesium | ppm | ASTM D5185m | | <1 | --- | --- |
| Calcium | ppm | ASTM D5185m | | 13 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | | 133 | --- | --- |
| Zinc | ppm | ASTM D5185m | | 31 | --- | --- |
| Sulfur | ppm | ASTM D5185m | | 22019 | --- | --- |

| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|-------------|------------|----------|----------|----------|
| Silicon | ppm | ASTM D5185m | >50 | 9 | --- | --- |
| Sodium | ppm | ASTM D5185m | | 8 | --- | --- |
| Potassium | ppm | ASTM D5185m | >20 | 2 | --- | --- |

| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-------------------|----------|------------|------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 0.8 | 0.37 | --- | --- |



OIL ANALYSIS REPORT

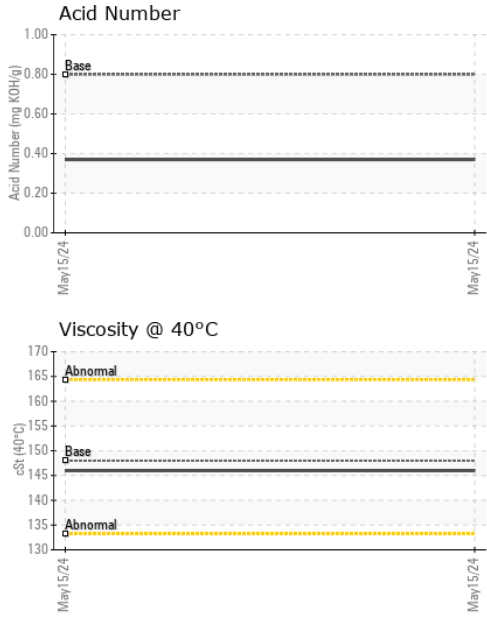


| VISUAL | method | limit/base | current | history1 | history2 | |
|------------------|--------|------------|---------|----------|----------|-----|
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Precipitate | scalar | *Visual | NONE | NONE | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | --- | --- |
| Free Water | scalar | *Visual | | NEG | --- | --- |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 | |
|------------------|--------|------------|---------|------------|----------|-----|
| Visc @ 40°C | cSt | ASTM D445 | 148 | 146 | --- | --- |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

| | | | | | | |
|--------|--|--|--|----------|----------|----------|
| Color | | | | no image | no image | no image |
| Bottom | | | | no image | no image | no image |

GRAPHS

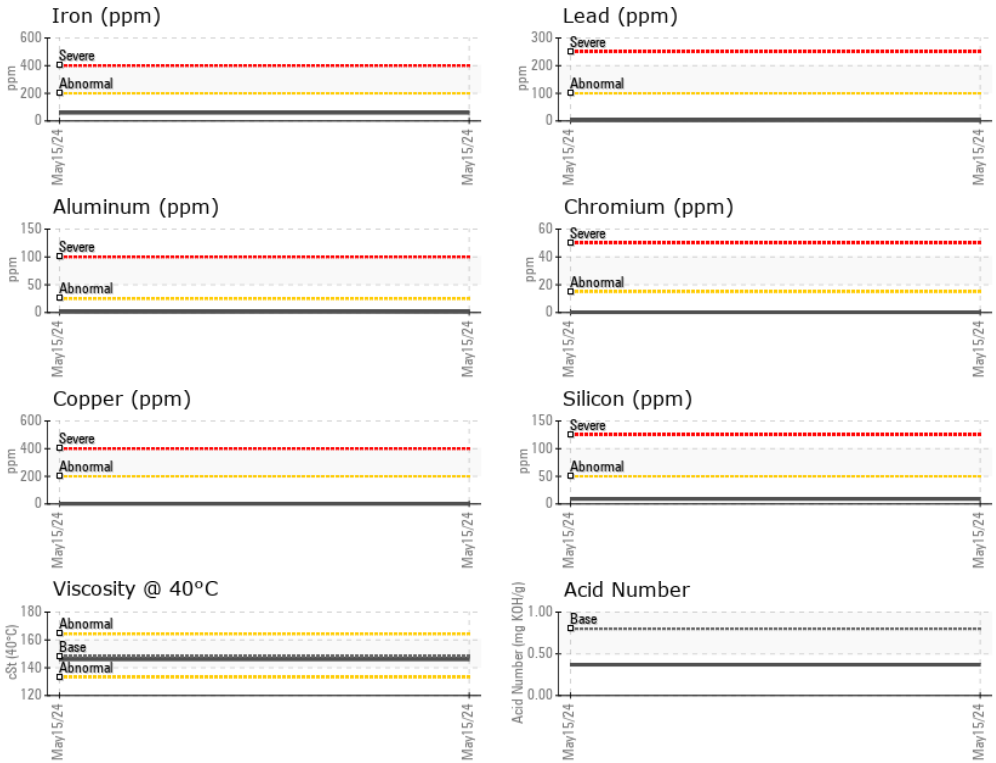

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : HPL0004781
Lab Number : 06185200
Unique Number : 11036526
Test Package : MOB 2

Received : 20 May 2024
Tested : 21 May 2024
Diagnosed : 21 May 2024 - Wes Davis

MARATHON PETROLEUM CO.
 IL. REFINING DIVISION, 400 S MARATHON AVE
 ROBINSON, IL
 US 62454

Contact: M.S. MANHART
 mmanhart@marathonpetroleum.com
 T: (618)544-2121

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: x: