




# OIL ANALYSIS REPORT

### Sample Rating Trend

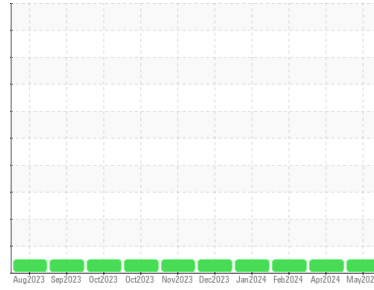

**NORMAL**



Area

**Bernardsville**

Machine Id

**PETERBILT 1325**

Component

**Diesel Engine**

Fluid

**GIBRALTAR 15W/40 SUPER S-3 LX (11 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0875351</b>	WC0900047	WC0900054
Sample Date	Client Info		<b>04 May 2024</b>	24 Apr 2024	06 Feb 2024
Machine Age	hrs	Client Info	<b>10723</b>	10654	10050
Oil Age	hrs	Client Info	<b>0</b>	10654	10050
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >110	<b>4</b>	8	8
Chromium	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m >2	<b>0</b>	1	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>2</b>	4	6
Lead	ppm	ASTM D5185m >45	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m >85	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	2	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	1	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>12</b>	6	15
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 66	<b>57</b>	58	59
Manganese	ppm	ASTM D5185m	<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185m 1000	<b>832</b>	720	663
Calcium	ppm	ASTM D5185m 1050	<b>1195</b>	1381	1413
Phosphorus	ppm	ASTM D5185m 1150	<b>1123</b>	1010	985
Zinc	ppm	ASTM D5185m 1270	<b>1229</b>	1207	1184
Sulfur	ppm	ASTM D5185m	<b>3633</b>	3714	3188

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	<b>5</b>	5	6
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	2	<1
Potassium	ppm	ASTM D5185m >20	<b>4</b>	9	12

### INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.2</b>	0.3	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.4</b>	8.0	8.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.0</b>	18.7	18.5


### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>12.4</b>	14.5	14.0
Base Number (BN)	mg KOH/g	ASTM D2896 10.1	<b>9.77</b>	7.0	6.8




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

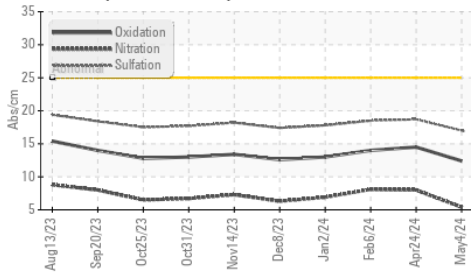

Base Number

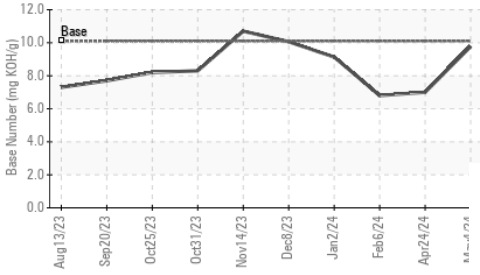









Viscosity @ 100°C

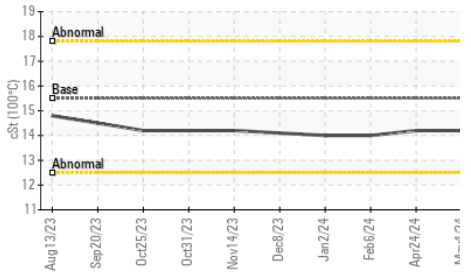

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.5	14.2	14.2

## GRAPHS

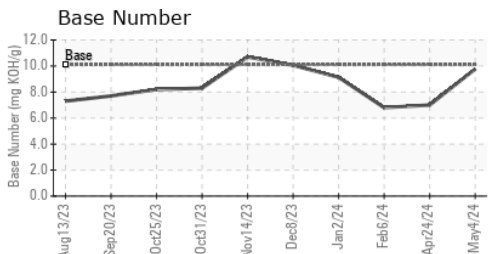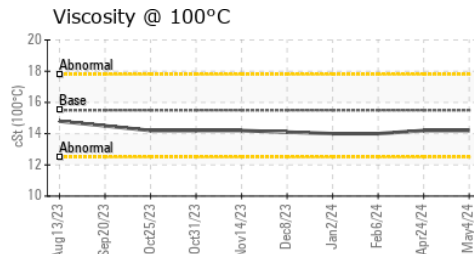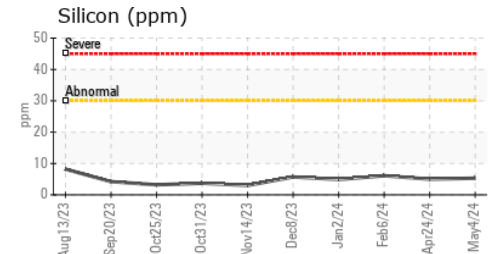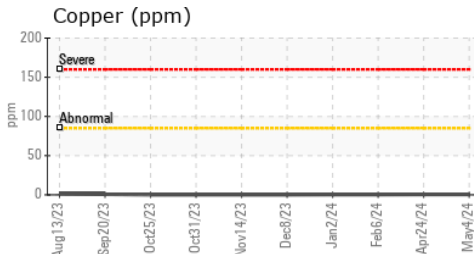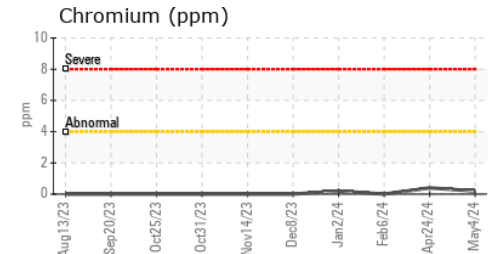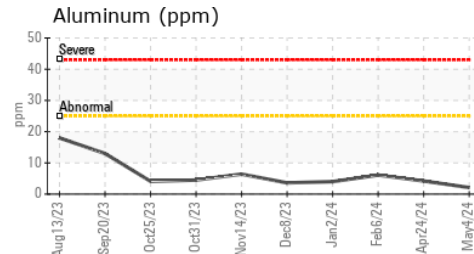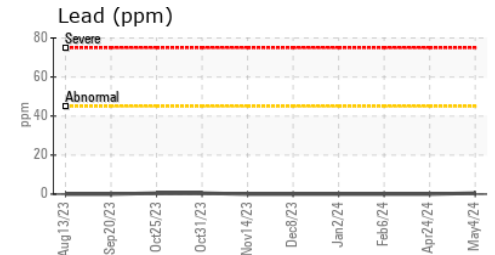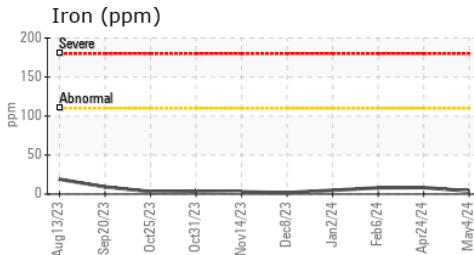

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0875351  
**Lab Number** : 06185241  
**Unique Number** : 11036567  
**Test Package** : MOB 2

**Received** : 20 May 2024  
**Tested** : 21 May 2024  
**Diagnosed** : 21 May 2024 - Wes Davis

**INTERSTATE WASTE-BERNARDSVILLE**  
 33 OLD QUARRY ROAD  
 BERNARDSVILLE, NJ  
 US 07924

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: Thomas Deluca  
 tdeluca@interstatewaste.com

T:  
 F: