




# OIL ANALYSIS REPORT



Area  
**OKLAHOMA/3/EG - LOADER**  
 Machine Id  
**50.25L [OKLAHOMA^3^EG - LOADER]**  
 Component  
**Rear Right Final Drive**  
 Fluid  
**MOBIL SHC 629 (--- GAL)**

## Sample Rating Trend

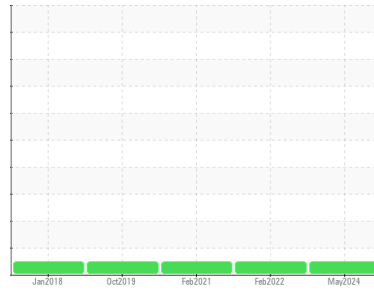

**NORMAL**



### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The condition of the oil is acceptable for the time in service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0935141</b>	WC0662469	WC0527850
Sample Date	Client Info		<b>12 May 2024</b>	08 Feb 2022	18 Feb 2021
Machine Age	hrs	Client Info	<b>22322</b>	19444	17697
Oil Age	hrs	Client Info	<b>1412</b>	1747	2331
Oil Changed	Client Info		<b>N/A</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>800	<b>336</b>	42	20
Chromium	ppm	ASTM D5185m	>10	<b>2</b>	<1	<1
Nickel	ppm	ASTM D5185m	>5	<b>1</b>	2	<1
Titanium	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>75	<b>2</b>	<1	0
Lead	ppm	ASTM D5185m	>10	<b>2</b>	1	2
Copper	ppm	ASTM D5185m	>75	<b>27</b>	8	12
Tin	ppm	ASTM D5185m	>8	<b>1</b>	<1	<1
Antimony	ppm	ASTM D5185m	>50	<b>---</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		<b>0</b>	1	1
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Manganese	ppm	ASTM D5185m		<b>3</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>2</b>	4	8
Calcium	ppm	ASTM D5185m		<b>164</b>	118	296
Phosphorus	ppm	ASTM D5185m		<b>525</b>	1142	386
Zinc	ppm	ASTM D5185m		<b>146</b>	51	146
Sulfur	ppm	ASTM D5185m		<b>541</b>	15094	1793

### CONTAMINANTS


	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>400	<b>22</b>	7	13
Sodium	ppm	ASTM D5185m		<b>1</b>	<1	0
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	1	0

### VISUAL

	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	<b>NONE</b>	MODER	NONE
Yellow Metal	scalar	*Visual	NONE	<b>LIGHT</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>LIGHT</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG



# OIL ANALYSIS REPORT

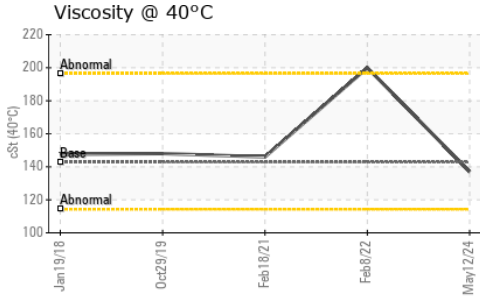




### FLUID PROPERTIES

method	limit/base	current	history1	history2	
Visc @ 40°C	cSt ASTM D445	142.8	<b>137</b>	200	146

### SAMPLE IMAGES

method	limit/base	current	history1	history2
Color		no image	no image	no image
Bottom		no image	no image	no image

### GRAPHS

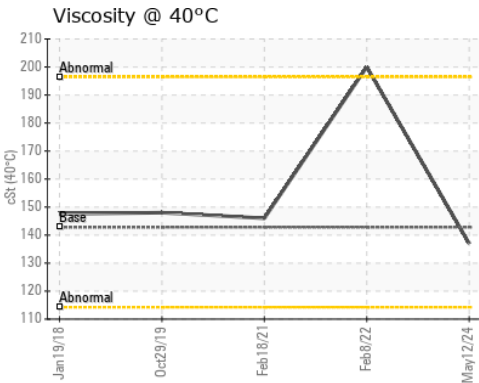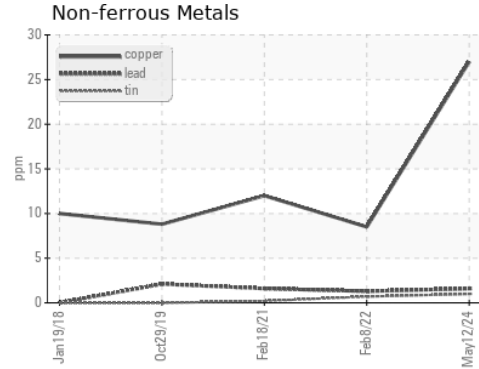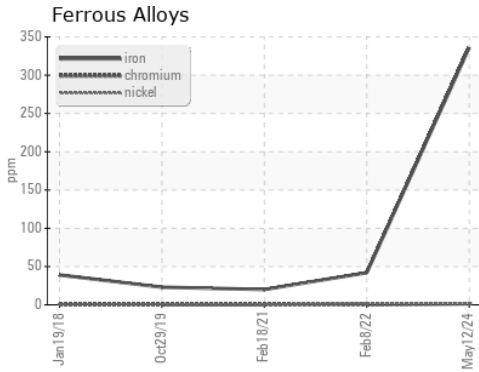

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0935141  
**Lab Number** : **06185323**  
**Unique Number** : 11036649  
**Test Package** : CONST

**Received** : 20 May 2024  
**Tested** : 22 May 2024  
**Diagnosed** : 22 May 2024 - Don Baldrige

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: DOUG KING  
 doug.king@sherwood.net  
 T: (316)617-3161  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)